iGuzzini


Last information update: April 2024

#### Product configuration: EE05

EE05: Pole-mounted system - ST1 optic - Warm White- Dali - ø46-60-76mm







### **Product code**

EE05: Pole-mounted system - ST1 optic - Warm White- Dali - ø46-60-76mm

### Technical description

Outdoor luminaire with direct light street optic for a high level of visual comfort (G4), designed to use LED lamps. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pretreatment process, in which the main phases are: degreasing, fluorozirconation (a protective surface film) and sealing (with a nanostructured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather resistance. Option of also adjusting, with a graduated scale, the inclination in relation to the road surface of +15°/-10° (in 5° steps) for a pole-top installation and +5°/20° (in 5° steps) for a lateral installation. 5 mm thick tempered sodium-calcium closure glass. The glass secured to the frame closes the led optical assembly which is secured to the components assembly with a hinge and 2 screws. The high IP rating is guaranteed by the silicone gasket placed between the two elements. Complete with circuit featuring monochrome LEDs and silver aluminium reflectors. LED assembly can be replaced directly on site. Possibility of replacing the LEDs in groups of 12 in the laboratory. DALI electronic control gear. Control gear connected with quick-coupling connectors. Driver with automatic internal temperature control system. Tool-free removable control gear plate unit. The optical assembly is fixed to the wallmounted or pole-top attachment with two clamping screws and two safety grub screws facilitate assembly. The light flow emitted in the upper hemisphere of the system in the horizontal position is null (in conformity with the strictest standards for the prevention of light pollution). All external screws are made of stainless steel.

The floodlight can be installed with pole-top or lateral mounting using a die-cast aluminium pole-top for diameters of 46/60/76 mm. Diameters from 60 to 76 mm without using the standard adaptor, and from 46 to 60 mm with the adaptor. Secured to the pole by two bolts and two safety locking nuts.

Weight (Kg) White (01) | Black (04) | Grey (15) | Rust Brown (F5)

## Mounting

wall arm|pole-top

## Wiring

The pole-top attachment guarantees the completely safe passage of power cables, avoiding piercing. 6-pole terminal board for Ø 7-14mm cables. Overvoltage protection: 10KV Common Mode and 6KV Differential Mode



**IK08** 



















**(S**)

Technical data	
Im system:	25810
W system:	213.8
Im source:	-
W source:	-
Luminous efficiency (lm/W, real value):	120.7
Im in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	100
CRI (minimum):	70
Colour temperature [K]:	3000
MacAdam Step:	3
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)

Life Time LED 2: 100,000h - L90 - B10 (Ta 40°C)  Voltage [Vin]: 230  Lamp code: LED  Number of lamps for optical assembly:  ZVEI Code: LED  Number of optical assemblies: Intervallo temperatura ambiente:  Power factor: See installation instructions  Inrush current: 58 A / 340 µs  Maximum number of luminaires of this type per miniature circuit breaker: B16A: 7 luminaires  C10A: 7 luminaires  C16A: 11 luminaires  Overvoltage protection: 10kV Common mode & 6kV  Differential mode  Control: DALI-2		
Lamp code:  Number of lamps for optical 1 assembly:  ZVEI Code:  Number of optical 1 assemblies: Intervallo temperatura from -40°C to 50°C. ambiente:  Power factor: See installation instructions Inrush current:  Maximum number of Iuminaires of this type per miniature circuit breaker:  Differential mode  Number of luminaires  B10A: 4 luminaires B16A: 7 luminaires C10A: 7 luminaires C10A: 11 luminaires C16A: 11 luminaires Overvoltage protection:  Number of luminaires B10A: 4 luminaires C10A: 7 luminaires C10A: 11 luminaires C10A: 11 luminaires C10A: Common mode & 6kV Differential mode	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
Number of lamps for optical 1 assembly:  ZVEI Code: LED  Number of optical 1 assemblies: Intervallo temperatura ambiente:  Power factor: See installation instructions Inrush current: 58 A / 340 µs  Maximum number of luminaires of this type per miniature circuit breaker: B16A: 7 luminaires  Maximum number of luminaires C16A: 11 luminaires  C16A: 11 luminaires  Overvoltage protection: 10kV Common mode & 6kV Differential mode	Voltage [Vin]:	230
assembly:  ZVEI Code:  Number of optical assemblies: Intervallo temperatura ambiente:  Power factor: Inrush current:  Maximum number of Iuminaires of this type per miniature circuit breaker:  Divervoltage protection:  BLD  from -40°C to 50°C.  See installation instructions  S8 A / 340 µs  B10A: 4 luminaires B16A: 7 luminaires C10A: 7 luminaires C16A: 11 luminaires C16A: 11 luminaires Differential mode	Lamp code:	LED
Number of optical assemblies: Intervallo temperatura ambiente: Power factor: See installation instructions Inrush current: 58 A / 340 µs Maximum number of Iuminaires of this type per miniature circuit breaker: B10A: 4 luminaires B16A: 7 luminaires C10A: 7 luminaires C16A: 11 luminaires Overvoltage protection: 10kV Common mode & 6kV Differential mode	' '	1
assemblies: Intervallo temperatura ambiente: Power factor: See installation instructions Inrush current: 58 A / 340 µs Maximum number of Iuminaires of this type per miniature circuit breaker: B16A: 7 Iuminaires C10A: 7 Iuminaires C16A: 11 Iuminaires Overvoltage protection: 10kV Common mode & 6kV Differential mode	ZVEI Code:	LED
ambiente:  Power factor:  Inrush current:  Maximum number of Iuminaires of this type per miniature circuit breaker:  Differential mode  See installation instructions  88 A / 340 µs  B10A: 4 luminaires B16A: 7 luminaires C10A: 7 luminaires C16A: 11 luminaires Differential mode		1
Inrush current: 58 A / 340 µs  Maximum number of luminaires of this type per miniature circuit breaker: B16A: 7 luminaires C10A: 7 luminaires C16A: 11 luminaires  Overvoltage protection: 10kV Common mode & 6kV Differential mode	•	from -40°C to 50°C.
Maximum number of luminaires of this type per miniature circuit breaker:  B10A: 4 luminaires B16A: 7 luminaires C10A: 7 luminaires C16A: 11 luminaires Overvoltage protection:  10kV Common mode & 6kV Differential mode	Power factor:	See installation instructions
luminaires of this type per miniature circuit breaker:  B10A: 4 luminaires B16A: 7 luminaires C10A: 7 luminaires C16A: 11 luminaires Overvoltage protection:  10kV Common mode & 6kV Differential mode	Inrush current:	58 A / 340 μs
Differential mode	luminaires of this type per	B16A: 7 luminaires C10A: 7 luminaires
Control: DALI-2	Overvoltage protection:	
	Control:	DALI-2

## Polar

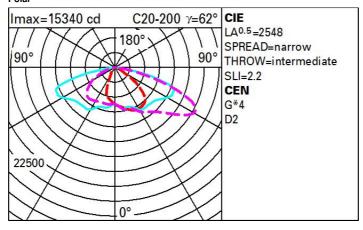

# **Utilisation factors**

