

Rail-Split RDM

Category

G) DMX Splitters

Description

6 port DMX512 splitter, housed in a DIN Rail Enclosure, with support for RDM and HES Talkback.

Mechanical

- Housing: DIN Rail Case
- Material: Lexan Plastic - UL94-V0 rated
- Overall Dimensions: 88mm (W) x 90mm (H) x 58mm (D)
- Mass: 0.25kg
- Mounting: 35mm DIN Rail or Surface Mount
- Country of Manufacture: United Kingdom

Electrical

- Input Voltage: 9V-48VDC
- Input Connector: Screw Terminal (2.5mm² max wire size)
- Input Power (max): 8W
- Duty Cycle: 80% @ 25°C

Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non-Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE FCC, WEEE, RoHS
- Warranty: 2 Year (Return to Base)

User Interface / Indication

- Connections:
 - (1) 3pin Screw Terminal DMX Input
 - (1) 3pin Screw Terminal DMX Loop
 - (1) 2pin Screw Terminal DC Voltage Input
 - (6) 3pin Screw Terminal DMX Output
- Indication: Power / DMX / RDM



Control

- Control: 6 Port DMX / RDM Splitter
- Input Protocols:
 - DMX512, DMX512(1990), DMX512-A
 - RDM V1.0 (E1.20 - 2006 ESTA Standard)
 - High End Systems Talkback
- Input Connector: Screw Terminal (2.5mm² max wire size)
- Output Protocols: Same as input
- Output Connector: Screw Terminal (2.5mm² max wire size)

Isolation / Protection

- Isolation:
 - DMX Input Opto-Isolated to 1kV
 - DMX Output - Ground Referenced
- Protection:
 - Internal Resettable Fuse - Control Electronics
 - +15kV ESD DMX Driver Protection

Package Contents

- Rail-Split RDM
- User Guide

Ordering Info


Product Code: Rail-Split RDM

Accessories (not included):


PSU-9-1.5-FER



Mounting Drawing

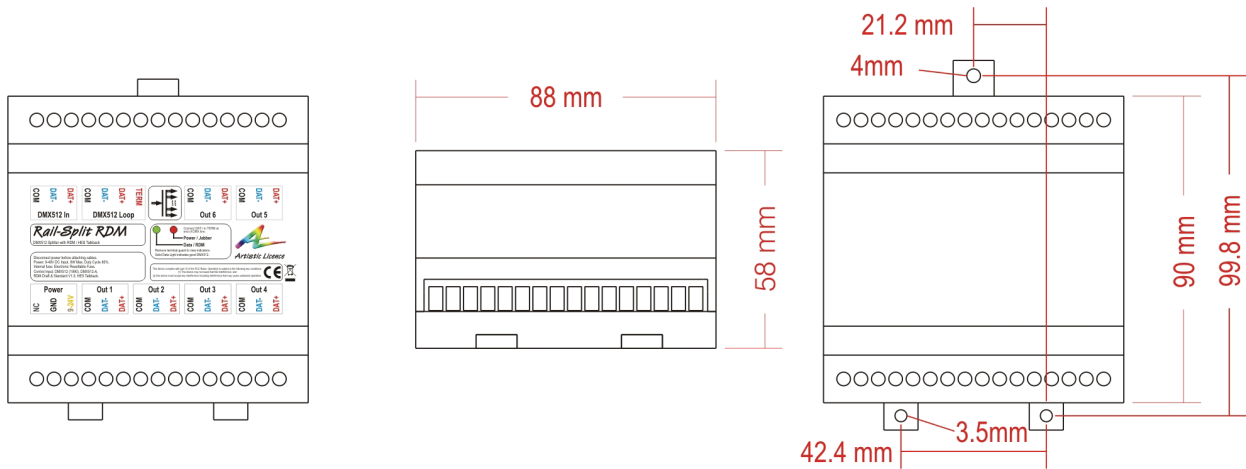

Wiring Drawing

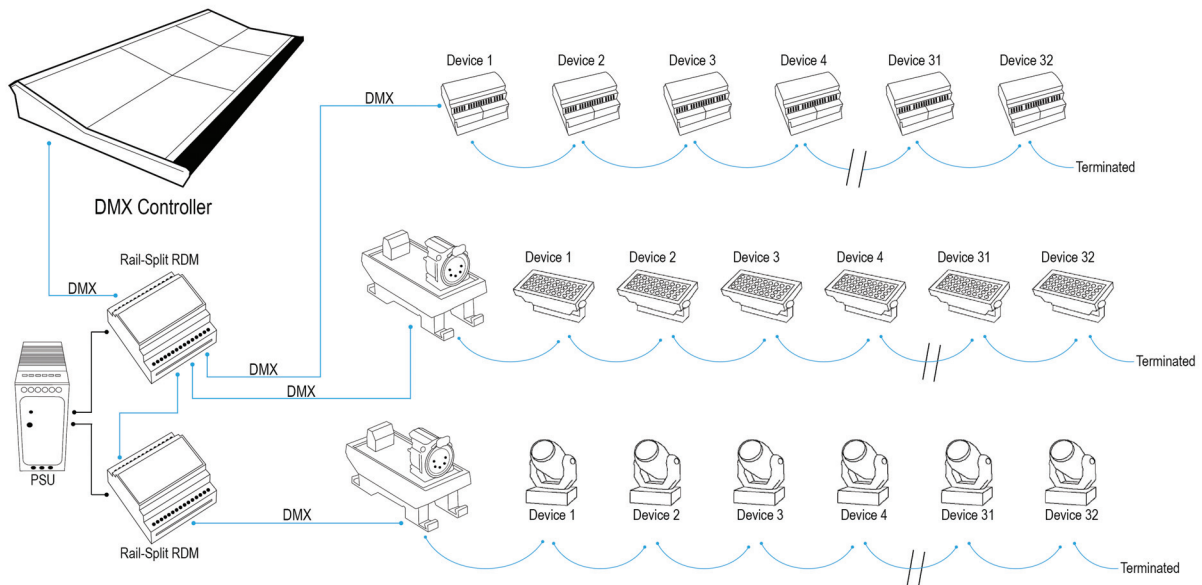

Artistic Licence Engineering Ltd

24 Forward Drive
Christchurch Avenue
Harrow, Middlesex
London, HA3 8NT
United Kingdom

Telephone +44 (0)20 8863 4515
Fax +44 (0)20 8426 0551

Email: Sales@ArtisticLicence.com
www.ArtisticLicence.com


Artistic Licence Integration Ltd

24 Forward Drive
Christchurch Avenue
Harrow, Middlesex
London, HA3 8NT
United Kingdom

Telephone +44 (0)20 8863 4515
Fax +44 (0)20 8426 0551

Email: Wayne.Howell@ArtisticLicence.com
www.ArtisticLicenceIntegration.com

Due to our policy of continuing product improvement specifications are subject to change without notice



Artistic Licence

Rail-Split RDM



Rail-Split RDM User Guide

(Version 2.3)

Rail-Split RDM is a fully bi-directional DMX512 splitter and distribution amplifier.

Key Features include:

- ❑ Input Optical Isolation
- ❑ Six independent outputs
- ❑ Bi-directional outputs
- ❑ RDM (Remote Device Management Draft & Standard V1.0)
- ❑ DMX512-A compatible
- ❑ Microprocessor controlled
- ❑ Surface mount or DIN rail mounted
- ❑ Support for High End System talkback protocol

Specification:

Input Voltage: 9-48V DC
Maximum Current: 1.5 A
Internal Fuse: Electronic Resettable Fuse
Duty Cycle: 80%
Dimensions: W:88 H:90 D:58mm
Mounting: DIN Rail or surface mount
IP: Indoor use only
Listings: CE, FCC
Max Wire Size: 2.5mm²


Power Supply Options: (order separately)

PSU-9-1.5-FER
Output: 9V 1.5A
Input: Auto-sensing
Max Rail-Splits: 1.5
Listing: CE / FCC / UL / PSE

PSU-24-2-FER
Output: 24V 2A
Input: Auto-sensing
Max Rail-Splits: 2
Listing: CE / FCC / UL / PSE



Rail-Split RDM Wiring Diagram:

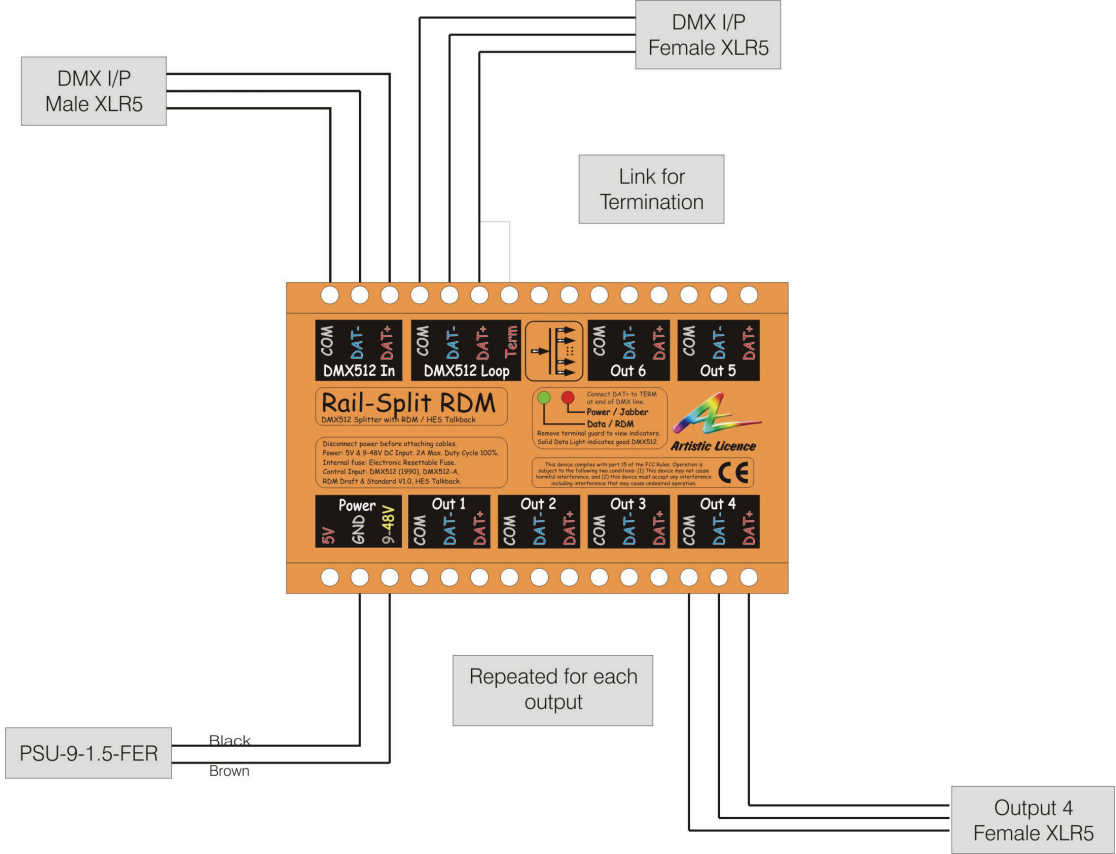


Note: It is recommended that wires from the PSU to the Rail-Split RDM have a ferrite core, or similar suppression device, fitted. This should be located close to the Rail-Split RDM.

DMX512 Wiring:

XLR Pin (Convention)	Rail-Split RDM Terminals	Function	Colour
1	GND	Ground	Black
2	DAT-	Data -	Blue
3	DAT+	Data +	Red
4		No Connection	
5		No Connection	

DIN Rail Surface Mounting:

To use the surface mount option push the three bottom tabs out until they click into place. We recommend using an M4 Pan head screw.

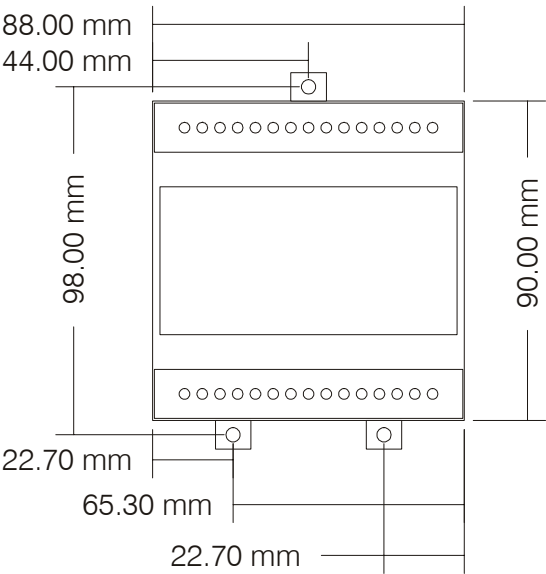

Input:

The DMX512 input is attached via three screw terminals. Please refer to the wiring diagram.

Loop Through:

A passive Loop Through connection allows onward connection to other DMX512 devices. If this feature is not required a wire link must be fitted to the correct screw terminals that will terminate the DMX line. Please refer to the wiring diagram.

Output:

Six DMX512 outputs are provided. Each output is capable of driving 32 additional DMX512 devices. It is not necessary to terminate any outputs that are not connected. However, a terminator must be connected to the final DMX512 device.

Indicators:

Two dual colour indicators are provided:

1. Data:

- ☐ Green: Indicates that DMX512 is being transmitted by the outputs.
- ☐ Red: Indicates that RDM data received by one of the outputs is being returned to the controller.

2. Power:

- ☐ Red: Indicates good power and normal operation.
- ☐ Flashing: Indicates that a connected RDM device is jabbering (returning unwanted data continuously).

System Connection:

The following table summarises the internal earth interconnection and isolation:

Please note that we use the term Earth-Ground to avoid international confusion. In Europe Earth-Ground is called Earth, in the USA Earth-Ground is called Ground.

Circuit	Description	
DMX512 Input (including Loop Through)	Type:	Isolated.
	Pin 1:	Connects to internal isolated circuit. No connection to Internal Logic Ground.
DMX512 Outputs	Type:	Grounded.
	Pin 1:	Connected to Internal Logic Ground.
Internal Logic Ground	Connects to Ground Power Input	

CE Compliance

Rail-Split RDM is CE compliant when installed in a shielded and earthed metal case



The DIN Rail Range:

- ❑ Rail-Split RDM - A fully bi-directional six channel DMX512 splitter and distribution amplifier
- ❑ Rail-Pipe - A six channel intelligent power supply / low voltage dimmer
- ❑ Rail-Switch - Provides six mains voltage relays with DMX512 and RDM Draft V1.0 support
- ❑ Rail-Demux - Provides 16 DMX512 to analogue outputs and RDM Draft V1.0 support
- ❑ Rail-Tran - Provides six Darlington transistor outputs, operation to 50V DC at 450mA, product total 750mA
- ❑ Rail-DALI - A 256 channel bi-directional DMX / DALI interface
- ❑ Rail-Patch - A DIN Rail mounted patch panel for a 5pin XLR to screw terminal connection
- ❑ Rail-PSU-D4 - A four circuit DALI Bus PSU
- ❑ CP12 - An LED dimmer designed to control high power LED devices
- ❑ Net-Pipe - A high power Ethernet controlled LED dimmer

Artistic Licence

© Artistic Licence Engineering Ltd. 2004
24 Forward Drive
Christchurch Avenue
Harrow
Middlesex
England
HA3 8NT
Tel: +44 (0)20 88 63 45 15
Fax: +44 (0)20 84 26 05 51
Email: Sales@ArtisticLicence.com



The information contained in this document is subject to change without notice. Artistic Licence Engineering Ltd. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of fitness for a particular purpose. Artistic Licence Engineering Ltd. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material. All trademarks are acknowledged.