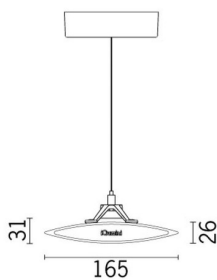


Last information update: June 2023

Product configuration: MJ30

MJ30: complete pendant luminaire L 1387 - Low Contrast - warm white LED - up / down lighting - integrated electronic control gear - general light optic

**Product code**MJ30: complete pendant luminaire L 1387 - Low Contrast - warm white LED - up / down lighting - integrated electronic control gear - general light optic **Attention! Code no longer in production****Technical description**

Pendant luminaire with LED lamps for general light (Low Contrast): down light emission (approx. 80%) - up light emission (approx. 20%). Very thin aluminium profile, complete with end caps made of thermoplastic material. Kit complete with suspension cables and power cable; ceiling base attachment made of thermoplastic material with sheet steel anchor plate. PMMA diffuser screen for down light emission; frosted polycarbonate upper screens. A control system, integrated with the electronic control gear, stabilises current and voltage values, guaranteeing correct LED lamp operation and longer life, also making the light flow emitted very even. Warm white LED.

Installation

pendant; steel suspension cables; suspension supports with rapid adjustment system are positioned at the ends of the profile; base for power cable (max. L 1500 mm) with anchor plate; all ceiling attachments use screws and screw anchors (not supplied).

Colour

White (01) | Grey (15)

Weight (Kg)

4.42

Mounting

ceiling pendant

Wiring

connected to the mains using a standard 5-pin terminal block on the power base. Product complete with electronic control gear, equipped with current stabiliser, integrated in the module. Down light / up light switch on separation: not available.


Complies with EN60598-1 and pertinent regulations



IP20

**Technical data**


lm system:	3630	Colour temperature [K]:	3000
W system:	46.4	MacAdam Step:	3
lm source:	6600	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	39.4	Ballast losses [W]:	7
Luminous efficiency (lm/W, real value):	78.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	546	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	55	Number of optical assemblies:	1
CRI (minimum):	80		

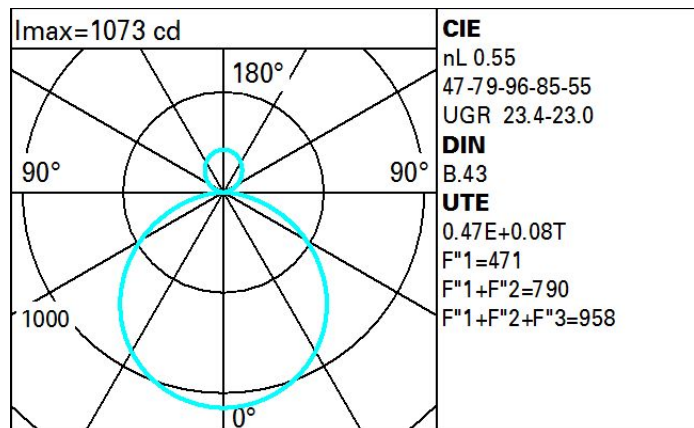Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	34	29	25	22	27	23	22	18	39
1.0	38	32	29	26	31	27	26	22	46
1.5	43	39	36	33	37	34	32	28	59
2.0	46	43	40	38	41	38	36	32	68
2.5	48	45	43	41	43	41	39	35	74
3.0	50	47	45	43	45	43	41	36	78
4.0	52	49	48	46	47	45	43	39	83
5.0	53	51	49	48	48	47	45	40	86

Luminance curve limit

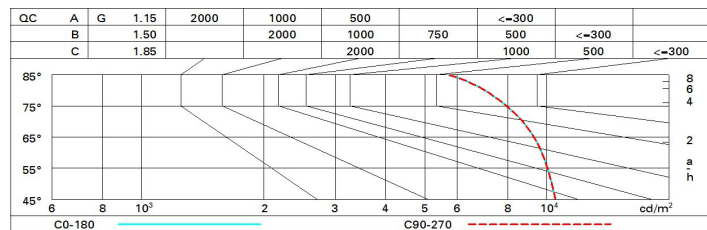

UGR diagram

Corrected UGR values (at 6000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	ceiling	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls	walls	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.	work pl.	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim	Room dim	viewed crosswise					viewed endwise				
x	y										
2H	2H	19.8	20.8	20.3	21.3	21.8	19.8	20.8	20.3	21.3	21.8
	3H	21.3	22.2	21.8	22.7	23.3	20.2	21.1	20.8	21.7	22.3
	4H	21.8	22.7	22.4	23.2	23.8	20.4	21.2	21.0	21.8	22.4
	6H	22.3	23.0	22.8	23.6	24.2	20.5	21.2	21.1	21.8	22.5
	8H	22.4	23.1	23.0	23.7	24.4	20.5	21.2	21.1	21.8	22.4
	12H	22.5	23.1	23.1	23.7	24.4	20.4	21.1	21.0	21.7	22.4
4H	2H	20.4	21.2	21.0	21.8	22.4	21.8	22.7	22.4	23.2	23.8
	3H	22.1	22.8	22.7	23.4	24.0	22.5	23.2	23.1	23.8	24.4
	4H	22.7	23.4	23.4	24.0	24.7	22.7	23.4	23.4	24.0	24.7
	6H	23.3	23.8	23.9	24.4	25.2	22.9	23.5	23.6	24.1	24.9
	8H	23.4	23.9	24.1	24.6	25.3	23.0	23.5	23.6	24.1	24.9
	12H	23.5	24.0	24.2	24.6	25.4	23.0	23.4	23.7	24.1	24.9
8H	4H	23.0	23.5	23.6	24.1	24.9	23.4	23.9	24.1	24.6	25.3
	6H	23.6	24.0	24.3	24.7	25.5	23.8	24.2	24.4	24.8	25.6
	8H	23.9	24.2	24.6	24.9	25.7	23.9	24.2	24.6	24.9	25.7
	12H	24.0	24.3	24.8	25.0	25.9	23.9	24.2	24.7	25.0	25.8
12H	4H	23.0	23.4	23.7	24.1	24.9	23.5	24.0	24.2	24.6	25.4
	6H	23.7	24.0	24.4	24.7	25.5	23.9	24.2	24.6	24.9	25.7
	8H	23.9	24.2	24.7	25.0	25.8	24.0	24.3	24.8	25.0	25.9
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.3 / -0.4					0.3 / -0.4				
	2.0H	0.4 / -0.6					0.4 / -0.6				