

IMPORTANT - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

⚠ DISCONNECT THE MAIN LINE BEFORE WIRING SECONDARY CONNECTORS.

REMODEL INSTALLATION (RF) - REMOTE DRIVER (REM)

A- MAKE THE CUT-OUT OPENING (SEE DIMENSIONS BELOW).

FLUSH MOUNTED MODEL (for drywall ceiling):



*USE FLUSH MOUNTED FRAME TO TRACE MOUNTING HOLE POSITIONS.

B- INSERT THE FLUSH MOUNTED FRAME THROUGH THE CUT-OUT AND PLACE FLAT ON TOP OF THE CEILING. SCREW IN THE FRAME TO THE CEILING USING MAX. #8 x 1" (25mm) SCREWS (**NOT INCLUDED**).


C- FINISH THE ASSEMBLY BY PLASTERING, SANDING AND PAINTING. LEAVE AT LEAST 6" (152mm) OF FEEDER CABLE ACCESSIBLE FROM UNDER THE CEILING.

A + B

Model	Flush mounted kit	Cut-out dimensions (A x B)	Ceiling thickness	Clearance
ILBIO02	-	1 $\frac{3}{8}$ " x 2 $\frac{1}{2}$ " (35 x 64mm)	$\frac{1}{8}$ "-1 $\frac{1}{8}$ " (3-29mm)	3 $\frac{1}{4}$ " (83mm)
	TK-LBIO02-FM-RF	2 $\frac{3}{16}$ " x 3 $\frac{1}{2}$ " (55 x 88mm)	$\frac{5}{16}$ " (16mm)	
ILBIO05	-	1 $\frac{1}{2}$ " x 5 $\frac{5}{16}$ " (37 x 141mm)	$\frac{1}{8}$ "-1 $\frac{1}{8}$ " (3-29mm)	
	TK-LBIO05-FM-RF	2 $\frac{3}{16}$ " x 6 $\frac{1}{2}$ " (55 x 165mm)	$\frac{5}{16}$ " (16mm)	

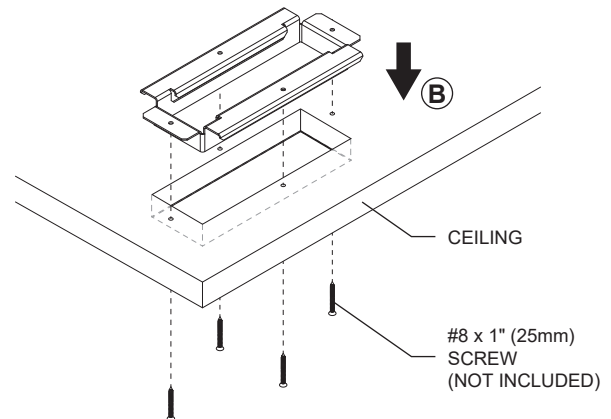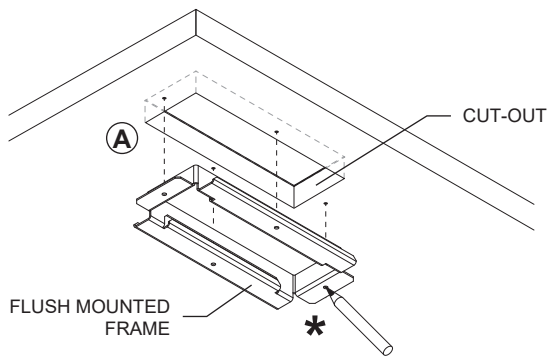

C

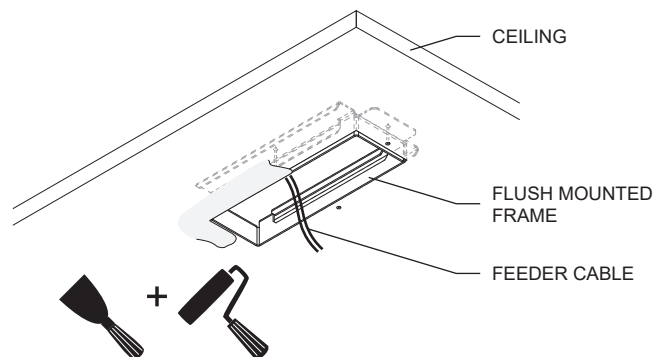

FIXTURE INSTALLATION

- A- MAKE ALL NECESSARY CONNECTIONS (**FOLLOWING WIRING DIAGRAM AND POLARITY MARKING**) USING THE CONNECTORS (**INCLUDED**).
 B- HOLD THE (2) CLIPS UPWARD AND INSERT FIXTURE INTO CUT-OUT.

FLUSH MOUNTED MODEL:

- B- HOLD THE (2) CLIPS UPWARD AND INSERT FIXTURE INTO CUT-OUT. ONCE INSERTED INTO THE FRAME, THE CLIPS SPRING BACK DOWN AND THE FRAME HOOKS WILL HOLD THE FIXTURE IN PLACE.

A + B

WIRING DIAGRAM

Multiple luminaires must be connected in series
 (home run or fixture chain)

