


Last information update: November 2024

Product configuration: N365+N370.04

N365: Initial module L 3602Frame

N370.04: Plate - wall washer - ON-OFF - LED warm - L 1196 - 17W 2900lm - 3000K - Black



Product code

N365: Initial module L 3602Frame

Technical description

Frame version extruded aluminium initial profile with contact frame; a triple length version designed to house 3 x Wall Washer emission LED plates.

Installation

Recessed using the brackets on the profile. The initial modules can be used individually if completed with accessory caps and the required LED module.

Colour

White (01)

Weight (Kg)

8

Mounting

ceiling recessed



Wiring

The initial profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks for easier luminaire installation. Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



Product code

N370.04: Plate - wall washer - ON-OFF - LED warm - L 1196 - 17W 2900lm - 3000K - Black **Attention! Code no longer in production**

Technical description

LED module set up for housing in iN60 Wall Washer system initial or intermediate profiles. Extruded aluminium heat sink linear element, formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. Supplied with integrated electronic control gear. Warm white LED.

Installation

Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

Colour

Black (04)

Weight (Kg)

1.94

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

Quick coupling terminal block connection for simplified luminaire installation. LED module complete with integrated electronic control gear.

Notes

The module houses the specific optic system for wall washer emission; to ensure correct installation consult the instruction leaflet.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	5307	CRI (minimum):	80
W system:	59.3	Colour temperature [K]:	3000
Im source:	8700	MacAdam Step:	3
W source:	51	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	89.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	1	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	61	Number of optical assemblies:	1

Polar

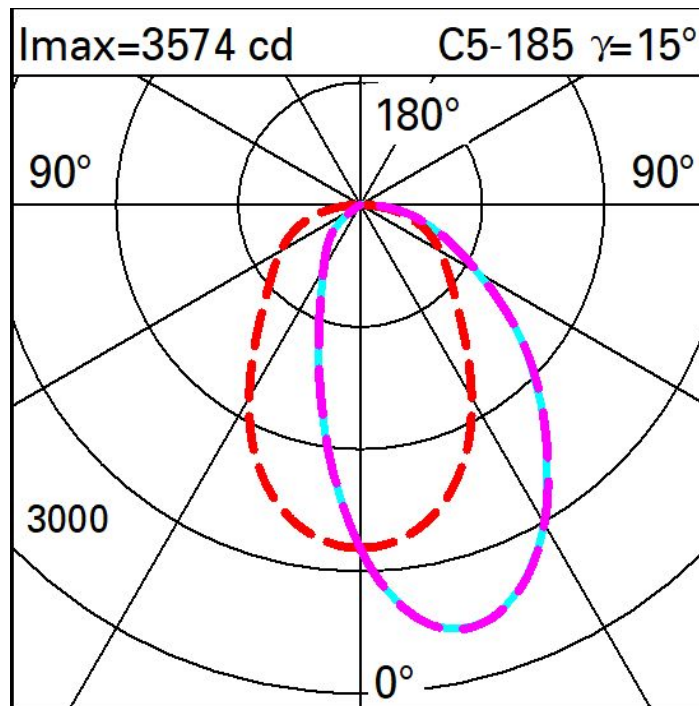

Illuminances

Lux													Wall distance = 1m	
3														
	17	34	76	179	423	636	423	179	76	34	17			
2	26	47	97	228	532	747	532	228	97	47	26			
	28	50	102	227	396	487	396	227	102	50	28			
1	28	50	95	175	260	302	260	175	95	50	28			
	27	48	81	125	165	185	165	125	81	48	27			
0														
	m	-2	-1	0	1	2	3							