

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	67	63	61	66	63	62	59	70
1.0	76	71	68	65	70	67	67	63	76
1.5	81	77	74	72	76	73	72	69	83
2.0	84	81	79	77	80	78	77	73	88
2.5	86	84	82	80	82	80	79	76	91
3.0	87	85	84	83	84	82	81	78	94
4.0	88	87	86	85	85	84	83	80	96
5.0	89	88	87	87	86	85	84	81	97

Curva límite de luminancia

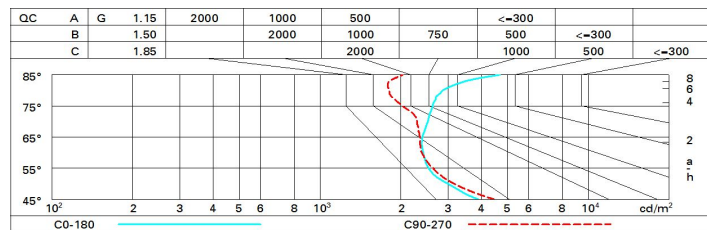


Diagrama UGR

Corrected UGR values (at 2210 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.2	14.8	14.5	15.1	15.4	14.5	15.1	14.8	15.4	15.7
	3H	14.6	15.2	15.0	15.5	15.8	14.5	15.0	14.8	15.4	15.7
	4H	14.9	15.5	15.3	15.8	16.1	14.4	15.0	14.8	15.3	15.7
	6H	15.3	15.8	15.6	16.1	16.5	14.4	14.9	14.8	15.3	15.6
	8H	15.5	15.9	15.9	16.3	16.7	14.4	14.9	14.8	15.2	15.6
	12H	15.7	16.2	16.1	16.6	16.9	14.4	14.8	14.8	15.2	15.6
4H	2H	14.2	14.7	14.6	15.1	15.4	15.0	15.5	15.3	15.8	16.2
	3H	14.8	15.2	15.2	15.6	16.0	15.1	15.6	15.5	15.9	16.3
	4H	15.2	15.6	15.6	16.0	16.4	15.2	15.6	15.6	16.0	16.4
	6H	15.7	16.1	16.2	16.5	17.0	15.2	15.6	15.7	16.0	16.5
	8H	16.0	16.3	16.5	16.8	17.3	15.2	15.6	15.7	16.0	16.5
	12H	16.4	16.7	16.9	17.2	17.7	15.2	15.5	15.7	16.0	16.5
8H	4H	15.3	15.6	15.8	16.1	16.5	15.4	15.8	15.9	16.2	16.7
	6H	15.9	16.2	16.4	16.7	17.2	15.6	15.9	16.1	16.4	16.9
	8H	16.4	16.6	16.9	17.1	17.6	15.7	16.0	16.2	16.5	17.0
	12H	16.9	17.1	17.5	17.7	18.2	15.8	16.0	16.4	16.6	17.1
12H	4H	15.3	15.6	15.8	16.0	16.5	15.5	15.8	16.0	16.3	16.8
	6H	16.0	16.2	16.5	16.7	17.3	15.8	16.0	16.3	16.5	17.0
	8H	16.5	16.7	17.0	17.2	17.7	15.9	16.1	16.4	16.6	17.2
Variations with the observer position at spacing:											
S =	1.0H	1.8 / -1.1					2.3 / -1.7				
	1.5H	3.5 / -1.3					4.4 / -2.0				
	2.0H	5.1 / -1.4					6.1 / -2.1				