

Last information update: March 2025

Product configuration: PH33.M6

PH33.M6: Module for Superrail 48V track - DALI - GL - L=1824 - Continuous line - 27W 3408.5lm - 2700K - CRI 90 - White/Black Transparent

**Product code**

PH33.M6: Module for Superrail 48V track - DALI - GL - L=1824 - Continuous line - 27W 3408.5lm - 2700K - CRI 90 - White/Black Transparent

Technical description

Linear lighting product with 2700K CRI90 monochrome LED complete with adapter for installation on a Superrail 48V track. General Light (High Output) luminaire with Opti-Diamond Space optic available in a White Cover (Transparent white) or Black Cover (Transparent black) version. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each light module on the track to be adjusted separately. Frameless version main body made of extruded aluminium. A rapid tool-free system for connecting the adapter electrically and mechanically to the track. Module for continuous line not including caps (to be ordered as an accessory).

Installation

Mechanical fastening with adapter on a Superrail 48V track. Close the line with a pair of caps to be ordered separately.

Colour

White/Black Transparent (M6)

Weight (Kg)

1.03

Mounting

Low voltage track

Wiring

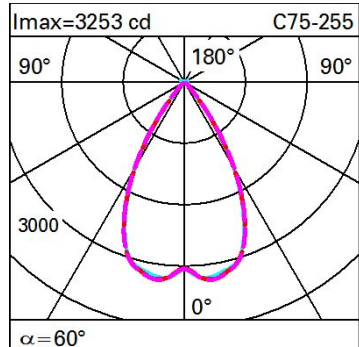
Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	3088	Lamp code:	LED
W system:	25	Number of lamps for optical assembly:	1
lm source:	4010	ZVEI Code:	LED
W source:	25	Number of optical assemblies:	1
Luminous efficiency (lm/W, real value):	123.5	LED current [mA]:	77
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	59	Minimum dimming %:	5
Light Output Ratio (L.O.R.) [%]:	77	Overvoltage protection:	2kV Common mode & 1kV Differential mode
CRI (minimum):	90	Dimming mode:	CCR
Colour temperature [K]:	2700	Control:	DALI
MacAdam Step:	3		

Polar

Imax=3253 cd C75-255 Lux					
90°	180°	90°	h	d1	d2 Em Emax
					
			4	4.6	4.6 156 198
			8	9.2	9.2 39 50
			12	13.8	13.9 17 22
			16	18.4	18.5 10 12

Isolux

