

Product configuration: Q414+R411.01

R411.01: Frame continuous line module - General Down Light - L 898 - TP(a) - White



Q414: Plate - General Down Light - Warm LED - DALI - L 896


LED module set up for housing in initial or intermediate system profiles - down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

Module insertion on profiles facilitated by a quick coupling system.

Weight (Kg)
1.2

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations



R411.01: Frame continuous line module - General Down Light - L 898 - TP(a) - White

Frame version extruded aluminium intermediate profile with contact frame; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal screen (diffused general light) in compliance with the TP(a) standard; screen set up for connecting several lengths by overlapping.

Recessed using the brackets on the profile; the mechanical systems for connecting the modules are included in the package.

Weight (Kg)
1.9

* Colours on request

ceiling recessed

Set up to house the LED modules required by the system.


Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



Im system:	2356	Colour temperature [K]:	3000
W system:	25.3	MacAdam Step:	3
Im source:	3800	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	93.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	62	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI-2

Polar

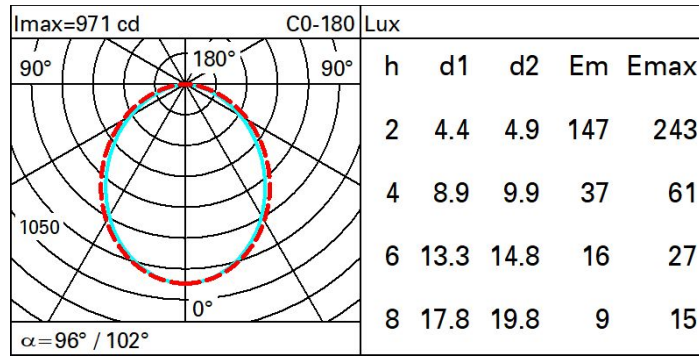

Isolux

