

Product configuration: Q940

Product code

Technical description

Installation

Colour
White (01)

Weight (Kg)
0.6


Mounting

mounting
wall recessed|ceiling recessed

Wiring

On control gear box with quick-coupling connections.


Complies with EN60598-1 and pertinent regulations

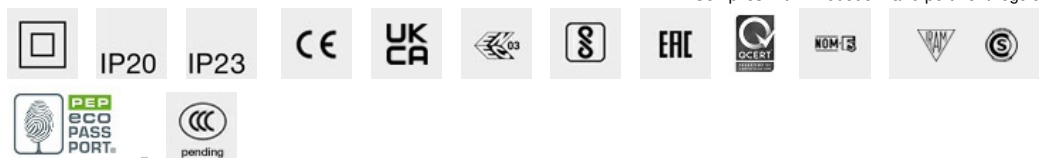

Technical data

Im system:	1224	CRI (typical):	97
W system:	24.5	Colour temperature [K]:	2700
Im source:	1700	MacAdam Step:	3
W source:	21	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	50	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	72	Number of optical assemblies:	1
CRI (minimum):	95	Control:	DALI-2


Polar

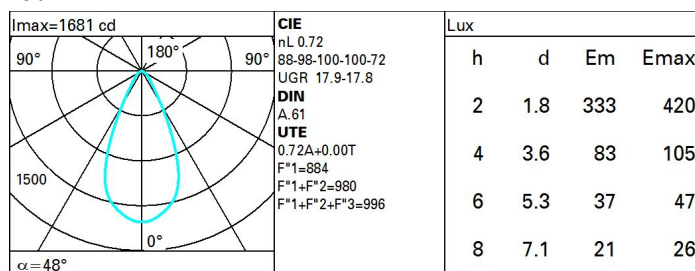

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	61	57	54	52	56	53	53	50	70
1.0	65	61	58	56	60	57	57	54	75
1.5	69	66	64	62	65	63	62	60	83
2.0	72	69	68	66	68	67	66	64	88
2.5	73	72	70	69	70	69	68	66	92
3.0	74	73	72	71	72	71	70	68	94
4.0	75	74	74	73	73	72	71	69	96
5.0	76	75	74	74	74	73	72	70	97

Luminance curve limit

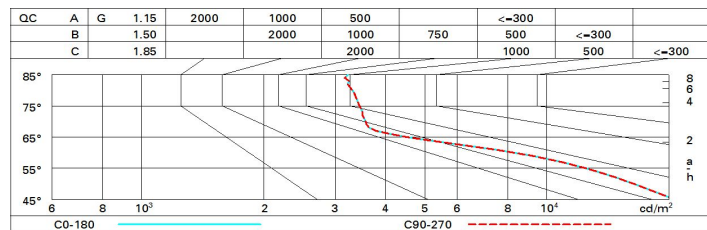

UGR diagram

Corrected UGR values (at 1700 lm bare lamp luminous flux)											
Reflect.:											
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.7	18.4	18.0	18.6	18.8	17.7	18.4	18.0	18.6	18.8
	3H	17.7	18.3	18.0	18.6	18.9	17.7	18.4	18.1	18.6	18.9
	4H	17.8	18.3	18.1	18.6	18.9	17.7	18.3	18.0	18.6	18.9
	6H	17.8	18.3	18.1	18.6	18.9	17.6	18.2	18.0	18.5	18.8
	8H	17.8	18.3	18.1	18.6	18.9	17.6	18.1	18.0	18.4	18.8
	12H	17.8	18.2	18.1	18.6	18.9	17.6	18.1	18.0	18.4	18.8
4H	2H	17.7	18.3	18.0	18.6	18.9	17.8	18.3	18.1	18.6	18.9
	3H	17.8	18.3	18.2	18.6	19.0	17.9	18.3	18.2	18.7	19.0
	4H	17.8	18.3	18.2	18.6	19.0	17.8	18.3	18.2	18.6	19.0
	6H	17.9	18.3	18.3	18.7	19.1	17.8	18.2	18.3	18.6	19.0
	8H	17.9	18.3	18.4	18.7	19.1	17.8	18.1	18.2	18.6	19.0
	12H	17.9	18.3	18.4	18.7	19.1	17.8	18.1	18.2	18.5	19.0
8H	4H	17.8	18.1	18.2	18.6	19.0	17.9	18.3	18.4	18.7	19.1
	6H	17.9	18.2	18.4	18.6	19.1	18.0	18.2	18.4	18.7	19.2
	8H	18.0	18.2	18.4	18.7	19.2	18.0	18.2	18.4	18.7	19.2
	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
12H	4H	17.8	18.1	18.2	18.5	19.0	17.9	18.3	18.4	18.7	19.1
	6H	17.9	18.1	18.4	18.6	19.1	18.0	18.2	18.5	18.7	19.2
	8H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
Variations with the observer position at spacing:											
S =	1.0H	1.5 / -1.5					1.5 / -1.5				
	1.5H	3.1 / -3.4					3.1 / -3.4				
	2.0H	4.9 / -4.6					4.9 / -4.6				