

Last information update: March 2025

**Product configuration: R477.D8**

R477.D8: Ø 153 - 3000K - CRI90 - UGR&lt;19 - INVERTER - White Transparent

**Product code**

R477.D8: Ø 153 - 3000K - CRI90 - UGR&lt;19 - INVERTER - White Transparent

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Prismatic thermoplastic reflector complete with flux enhancer. Optic available with two finishes, clear white or clear black. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K) and microfilm that is able to guarantee a light beam of UGR<19 L<3000 cd/m<sup>2</sup>, which is ideal for environments with video terminals. Luminaire complete with inverter for safety light.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

**Colour**

White Transparent (D8)

**Weight (Kg)**

1.13

**Mounting**

ceiling surface

**Wiring**

Product complete with INVERTER for safety light.


Complies with EN60598-1 and pertinent regulations



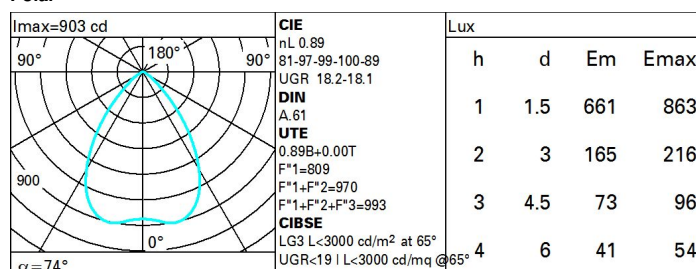
IP20

IP54

On the visible part of the product once installed

**Technical data**

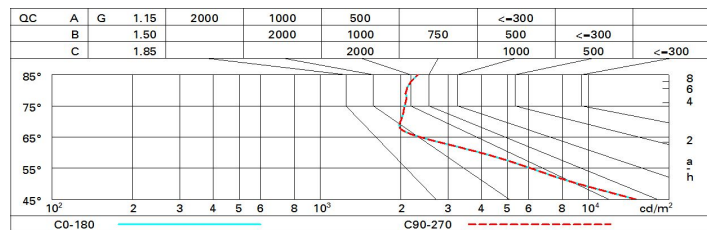
lm system:	1291	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	15.4	Lamp code:	LED
lm source:	1450	Number of lamps for optical assembly:	1
W source:	9.6	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	83.8	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	20 A / 200 µs
Light Output Ratio (L.O.R.) [%]:	89	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 14 luminaires B16A: 23 luminaires C10A: 23 luminaires C16A: 39 luminaires
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	On/off
MacAdam Step:	2		

**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	66	62	59	65	62	61	57	64
1.0	77	72	68	65	71	67	67	63	70
1.5	84	79	76	73	78	75	74	71	80
2.0	87	84	81	79	83	80	79	76	85
2.5	89	87	85	83	85	83	83	79	89
3.0	91	89	87	85	87	86	84	82	92
4.0	92	91	89	88	89	88	87	84	94
5.0	93	92	91	90	90	89	88	85	95

# Luminance curve limit



# UGR diagram

Corrected UGR values (at 1450 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x            y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	18.2	19.0	18.5	19.2	19.5	18.2	19.0	18.5	19.2	19.5
	3H	18.2	18.9	18.5	19.1	19.4	18.1	18.9	18.5	19.1	19.4
	4H	18.2	18.8	18.5	19.1	19.4	18.1	18.8	18.4	19.1	19.4
	6H	18.2	18.8	18.5	19.1	19.4	18.0	18.6	18.4	19.0	19.3
	8H	18.2	18.8	18.5	19.1	19.4	18.0	18.6	18.4	18.9	19.3
	12H	18.2	18.7	18.6	19.1	19.4	18.0	18.5	18.3	18.9	19.2
4H	2H	18.1	18.8	18.4	19.1	19.4	18.2	18.8	18.5	19.1	19.4
	3H	18.1	18.7	18.5	19.0	19.4	18.2	18.7	18.6	19.1	19.4
	4H	18.1	18.6	18.6	19.0	19.4	18.1	18.6	18.6	19.0	19.4
	6H	18.2	18.6	18.6	19.0	19.5	18.1	18.6	18.5	19.0	19.4
	8H	18.2	18.6	18.7	19.0	19.5	18.1	18.5	18.5	18.9	19.3
	12H	18.3	18.6	18.7	19.1	19.5	18.1	18.4	18.5	18.9	19.3
8H	4H	18.1	18.5	18.5	18.9	19.3	18.2	18.6	18.7	19.0	19.5
	6H	18.2	18.5	18.7	19.0	19.5	18.3	18.6	18.7	19.0	19.5
	8H	18.3	18.5	18.8	19.0	19.5	18.3	18.5	18.8	19.0	19.5
	12H	18.3	18.6	18.8	19.1	19.6	18.3	18.5	18.8	19.0	19.5
12H	4H	18.1	18.4	18.5	18.9	19.3	18.3	18.6	18.7	19.1	19.5
	6H	18.2	18.5	18.7	18.9	19.4	18.3	18.6	18.8	19.1	19.6
	8H	18.3	18.5	18.8	19.0	19.5	18.3	18.6	18.8	19.1	19.6
Variations with the observer position at spacing:											
S =	1.0H	1.7 / -2.6					1.7 / -2.6				
	1.5H	3.5 / -4.1					3.5 / -4.1				
	2.0H	5.3 / -4.9					5.3 / -4.9				