

Last information update: April 2025

Product configuration: RA02.E7

RA02.E7: Fixed round recessed luminaire - LED - medium - 17W 1718.1lm - 2700K - CRI 90 - White / burnished chrome

**Product code**

RA02.E7: Fixed round recessed luminaire - LED - medium - 17W 1718.1lm - 2700K - CRI 90 - White / burnished chrome

Technical description

Round recessed luminaire with contact frame. Fixed version. The LED is set back to minimize glare. The main body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - medium optic. Structure with die-cast aluminium external contact frame with a single white finish. The internal ring is made of thermoplastic available in a range of painted and metallised finishes. Safety glass included Quick and easy tool free assembly. High color rendering index 2700K LED. Power unit available with a separate code no.

Installation

Recessed in a false ceiling by means of an anti-fall steel wire spring - minimum thickness of false ceiling: 1 mm - preparation hole Ø 96 mm.

Colour

White / burnished chrome (E7)*

Weight (Kg)

0.37

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Notes

A wide range of decorative accessories and diffusers is available.

Complies with EN60598-1 and pertinent regulations



IP20


IP44

On the visible part of the product once installed

**Technical data**

lm system:	1718	CRI (minimum):	90
W system:	17	Colour temperature [K]:	2700
lm source:	2070	MacAdam Step:	2
W source:	17	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	101.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	17°	LED current [mA]:	500


Polar

$I_{max}=10076\text{ cd}$		CIE nL 0.83 99-100-100-100-83 UGR <10-<10 DIN A.61 UTE 0.83A+0.00T F*1=992 F*1+F*2=998 F*1+F*2+F*3=1000 CIBSE LG3 L<3000 cd/m ² at 65° UGR<10 L<3000 cd/mq @65°		Lux			
				h	d	Em	Emax
				2	0.6	1976	2519
				4	1.2	494	630
				6	1.8	220	280
$\alpha = 17^\circ$				8	2.4	123	157

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	67	65	78
1.0	78	75	72	70	74	71	71	68	82
1.5	82	79	77	76	78	77	76	73	88
2.0	85	83	81	80	81	80	79	77	93
2.5	86	85	84	83	83	82	82	79	96
3.0	87	86	85	84	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	87	87	86	85	83	100

Luminance curve limit

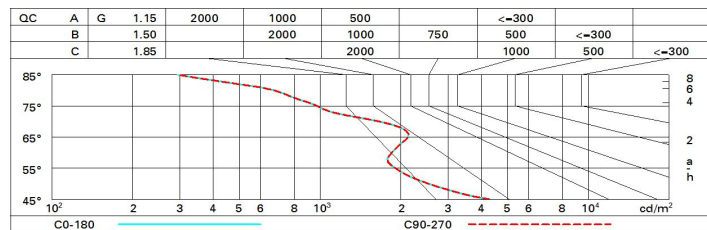

UGR diagram

Corrected UGR values (at 2070 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	5.9	8.0	6.2	8.3	8.6	5.9	8.0	6.2	8.3	8.6
	3H	6.1	7.7	6.4	8.0	8.3	5.8	7.4	6.2	7.8	8.1
	4H	6.1	7.4	6.4	7.7	8.1	5.8	7.2	6.2	7.5	7.8
	6H	6.1	7.1	6.4	7.4	7.8	5.8	6.8	6.2	7.2	7.5
	8H	6.0	7.1	6.4	7.4	7.8	5.8	6.8	6.2	7.2	7.5
	12H	6.0	7.0	6.4	7.4	7.8	5.7	6.8	6.1	7.1	7.5
4H	2H	5.8	7.2	6.2	7.5	7.8	6.1	7.4	6.4	7.7	8.1
	3H	6.1	7.2	6.5	7.5	7.9	6.1	7.2	6.5	7.5	7.9
	4H	6.1	7.1	6.5	7.5	7.9	6.1	7.1	6.5	7.5	7.9
	6H	5.8	7.5	6.3	7.9	8.4	5.8	7.5	6.3	7.9	8.4
	8H	5.7	7.6	6.2	8.0	8.5	5.7	7.5	6.2	8.0	8.5
	12H	5.6	7.5	6.1	8.0	8.5	5.6	7.5	6.1	8.0	8.5
8H	4H	5.7	7.5	6.2	8.0	8.5	5.7	7.6	6.2	8.0	8.5
	6H	5.6	7.4	6.1	7.9	8.4	5.6	7.4	6.1	7.9	8.4
	8H	5.6	7.2	6.2	7.7	8.2	5.6	7.2	6.2	7.7	8.2
	12H	5.8	6.8	6.3	7.3	7.8	5.8	6.8	6.3	7.3	7.8
12H	4H	5.6	7.5	6.1	8.0	8.5	5.6	7.5	6.1	8.0	8.5
	6H	5.6	7.2	6.1	7.7	8.2	5.6	7.2	6.1	7.7	8.2
	8H	5.8	6.8	6.3	7.3	7.8	5.8	6.8	6.3	7.3	7.8
Variations with the observer position at spacing:											
S =	1.0H	4.5 / -3.9					4.5 / -3.9				
	1.5H	7.2 / -4.3					7.2 / -4.3				
	2.0H	9.1 / -4.4					9.1 / -4.4				