



Last information update: February 2025

Product configuration: RL67.39

RL67.39: Ø 225 mm - warm white - DALI - White/Aluminium

**Product code**

RL67.39: Ø 225 mm - warm white - DALI - White/Aluminium

Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3500K). General lighting beam.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.03

Mounting

ceiling surface

Wiring

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of the product once installed



pending

Technical data

lm system:	2880	Colour temperature [K]:	3500
W system:	25.3	MacAdam Step:	2
lm source:	3200	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Lamp code:	LED
Luminous efficiency (lm/W, real value):	113.8	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	90	Control:	DALI-2
CRI (minimum):	90		


Polar

Imax=1912 cd		CIE		Lux			
90°	180°	nL 0.90		h	d	Em	Emax
		79-99-100-100-90		2	3.1	347	478
		UGR 19.8-19.8		4	6.3	87	120
		DIN A 61		6	9.4	39	53
		UTE 0.90B+0.00T		8	12.5	22	30
		F*1=793					
		F*1+F*2=994					
		F*1+F*2+F*3=1000					
		CIBSE LG3 L<1500 cd/m² at 65°					
α=76°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	66	62	58	65	61	61	57	63
1.0	78	72	68	65	71	67	67	63	70
1.5	85	80	77	74	79	76	75	72	80
2.0	88	85	83	80	84	82	81	77	86
2.5	91	88	86	84	87	85	84	81	89
3.0	92	90	88	87	88	87	86	83	92
4.0	93	92	90	89	90	89	88	85	94
5.0	94	93	92	91	91	90	89	86	95

Luminance curve limit

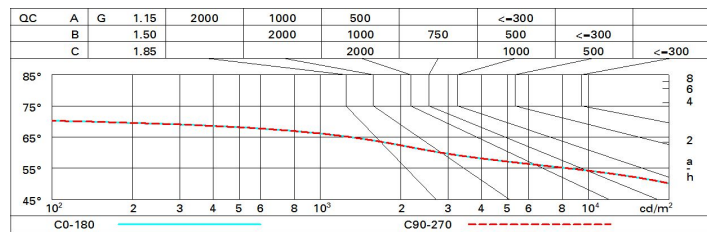

UGR diagram

Corrected UGR values (at 3200 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	20.4	21.2	20.7	21.4	21.7	20.4	21.2	20.7	21.4	21.7
	3H	20.2	20.9	20.6	21.2	21.5	20.3	21.0	20.6	21.3	21.5
	4H	20.2	20.8	20.5	21.1	21.4	20.2	20.9	20.5	21.2	21.5
	6H	20.1	20.7	20.4	21.0	21.3	20.1	20.7	20.5	21.0	21.4
	8H	20.0	20.6	20.4	20.9	21.3	20.1	20.7	20.5	21.0	21.3
	12H	20.0	20.6	20.4	20.9	21.3	20.0	20.6	20.4	20.9	21.3
4H	2H	20.2	20.9	20.5	21.2	21.5	20.2	20.8	20.5	21.1	21.4
	3H	20.1	20.6	20.4	20.9	21.3	20.0	20.6	20.4	20.9	21.3
	4H	20.0	20.4	20.4	20.8	21.2	20.0	20.4	20.4	20.8	21.2
	6H	19.9	20.3	20.3	20.7	21.1	19.9	20.3	20.3	20.7	21.1
	8H	19.8	20.2	20.3	20.6	21.1	19.8	20.2	20.3	20.6	21.1
	12H	19.8	20.1	20.2	20.6	21.0	19.8	20.1	20.2	20.6	21.0
8H	4H	19.8	20.2	20.3	20.6	21.1	19.8	20.2	20.3	20.6	21.1
	6H	19.7	20.1	20.2	20.5	21.0	19.7	20.1	20.2	20.5	21.0
	8H	19.7	20.0	20.2	20.4	20.9	19.7	20.0	20.2	20.4	20.9
	12H	19.6	19.9	20.1	20.4	20.9	19.6	19.9	20.1	20.4	20.9
12H	4H	19.8	20.1	20.2	20.6	21.0	19.8	20.1	20.2	20.6	21.0
	6H	19.7	20.0	20.2	20.4	20.9	19.7	20.0	20.2	20.4	20.9
	8H	19.6	19.9	20.1	20.4	20.9	19.6	19.9	20.1	20.4	20.9
Variations with the observer position at spacing:											
S =		1.0H					1.6 / -5.6				
		1.5H					3.4 / -13.6				
		2.0H					5.4 / -21.7				