

Last information update: April 2025

Product configuration: RT66.S3

RT66.S3: Luminaire L=880 - Warm White - Integrated DALI - Very Wide Flood (Down) optic - UGR<19 - 30W 5002.5lm - 3000K - White/Black/Black Transparent

**Product code**

RT66.S3: Luminaire L=880 - Warm White - Integrated DALI - Very Wide Flood (Down) optic - UGR<19 - 30W 5002.5lm - 3000K - White/Black/Black Transparent

Technical description

Luminaire made of painted extruded aluminium, frame and caps made of injection-moulded thermoplastic. Very Wide Flood optic (80°) in a Space Opti-Diamond (PMMA) version with a rear cover available in a White (Transparent White) or Black (Transparent Black) version. Integrated DALI dimmable power supply with CRI80 direct emission Warm white (3000K) monochrome LED lamp (Mid-Power). Version with UGR < 19 controlled luminance - in compliance with the standard for use in environments with video monitors ($L \leq 3000 \text{ cd/m}^2$). With mechanical rotation block.

Installation

For an electrified track.

Colour

White/Black/Black Transparent (S3)

Weight (Kg)

2.73

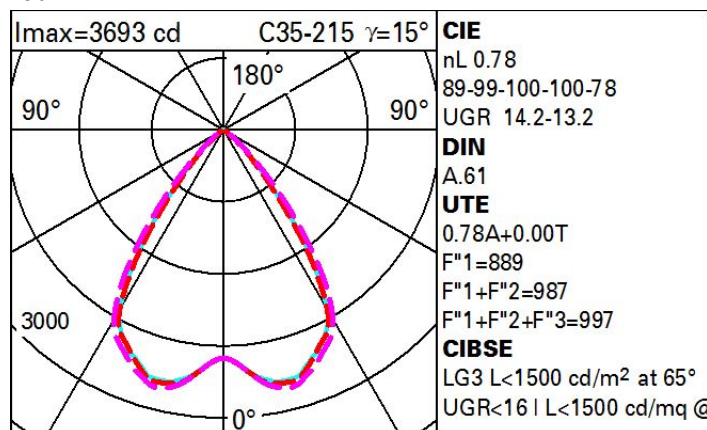
Mounting

internal wall corner|dali track|three circuit track|ceiling recessed|ceiling surface

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	4836	Lamp code:	LED
W system:	30	Number of lamps for optical assembly:	1
Im source:	6200	ZVEI Code:	LED
W source:	30	Number of optical assemblies:	1
Luminous efficiency (Im/W, real value):	161.2	Power factor:	See installation instructions
Im in emergency mode:	-	Inrush current:	10 A / 220 μ s
Total light flux at or above an angle of 90° [Lm]:	0	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 18 luminaires B16A: 30 luminaires C10A: 31 luminaires C16A: 51 luminaires
Light Output Ratio (L.O.R.) [%]:	78	Minimum dimming %:	1
CRI (minimum):	80	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2
MacAdam Step:	3		

Polar

	R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	59	56	61	58	58	55	70	
1.0	70	66	63	61	65	62	62	59	76	
1.5	75	72	69	67	71	69	68	65	84	
2.0	78	75	74	72	74	73	72	69	89	
2.5	79	78	76	75	76	75	74	72	92	
3.0	81	79	78	77	78	77	76	74	94	
4.0	82	81	80	79	79	79	77	75	96	
5.0	82	82	81	80	80	79	78	76	97	

QC	A	G	1.15	2000	1000	500	<=300		
B			1.50		2000	1000	750	500	<=300
C			1.85			2000		1000	500

85°
75°
65°
55°
45°

10^2 2 3 4 5 6 10^3 2 3 4 5 10^4

C0-180 C90-270

8
6
4
2
a
h

cd/m²

Corrected UGR values (at 6200 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
walls		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
work pl.		viewed					viewed				
Room dim		crosswise					endwise				
x	y										
2H	2H	14.6	15.3	14.9	15.6	15.8	13.7	14.5	14.0	14.7	14.9
	3H	14.5	15.1	14.8	15.4	15.7	13.6	14.3	13.9	14.5	14.8
	4H	14.4	15.0	14.8	15.3	15.6	13.5	14.1	13.9	14.4	14.7
	6H	14.4	14.9	14.7	15.3	15.6	13.5	14.0	13.8	14.3	14.7
	8H	14.4	14.9	14.7	15.2	15.6	13.4	14.0	13.8	14.3	14.6
	12H	14.3	14.8	14.7	15.2	15.5	13.4	13.9	13.8	14.2	14.6
4H	2H	14.4	15.0	14.7	15.3	15.6	13.6	14.2	13.9	14.5	14.8
	3H	14.3	14.8	14.7	15.1	15.5	13.4	14.0	13.8	14.3	14.6
	4H	14.2	14.7	14.6	15.0	15.4	13.4	13.8	13.8	14.2	14.6
	6H	14.2	14.6	14.6	15.0	15.4	13.3	13.7	13.7	14.1	14.5
	8H	14.2	14.5	14.6	14.9	15.4	13.2	13.6	13.7	14.0	14.5
	12H	14.1	14.4	14.6	14.9	15.3	13.2	13.5	13.7	13.9	14.4
8H	4H	14.1	14.5	14.5	14.9	15.3	13.3	13.6	13.7	14.1	14.5
	6H	14.1	14.3	14.5	14.8	15.3	13.2	13.5	13.7	13.9	14.4
	8H	14.0	14.3	14.5	14.7	15.2	13.2	13.4	13.6	13.9	14.4
	12H	14.0	14.2	14.5	14.7	15.2	13.1	13.3	13.6	13.8	14.3
12H	4H	14.1	14.4	14.5	14.8	15.3	13.2	13.6	13.7	14.0	14.5
	6H	14.0	14.3	14.5	14.7	15.2	13.2	13.4	13.7	13.9	14.4
	8H	14.0	14.2	14.5	14.7	15.2	13.1	13.3	13.6	13.8	14.3

Variations with the observer position at spacing:

S =	1.0H	3.6 / -8.7	3.8 / -9.6
	1.5H	6.3 / -9.7	6.2 / -10.3
	2.0H	8.3 / -10.3	8.2 / -10.6