

Last information update: April 2025

**Product configuration: RT71.S4**

RT71.S4: Luminaire L=880 - Integrated DALI - Very Wide Flood (Down) optic - UGR&lt;19 - 33.5W 4828.5lm - 3500K - CRI 90 - Black/Black/Black Transparent

**Product code**

RT71.S4: Luminaire L=880 - Integrated DALI - Very Wide Flood (Down) optic - UGR&lt;19 - 33.5W 4828.5lm - 3500K - CRI 90 - Black/Black/Black Transparent

**Technical description**

Luminaire made of painted extruded aluminium, frame and caps made of injection-moulded thermoplastic. Very Wide Flood optic (80°) in a Space Opti-Diamond (PMMA) version with a rear cover available in a White (Transparent White) or Black (Transparent Black) version. Integrated DALI dimmable power supply with 3500K CRI90 direct emission monochrome LED lamp (Mid-Power). Version with UGR < 19 controlled luminance - in compliance with the standard for use in environments with video monitors ( $L \leq 3000$  cd/m<sup>2</sup>).

**Installation**

For an electrified track

**Colour**

Black/Black/Black Transparent (S4)


**Weight (Kg)**

2.73

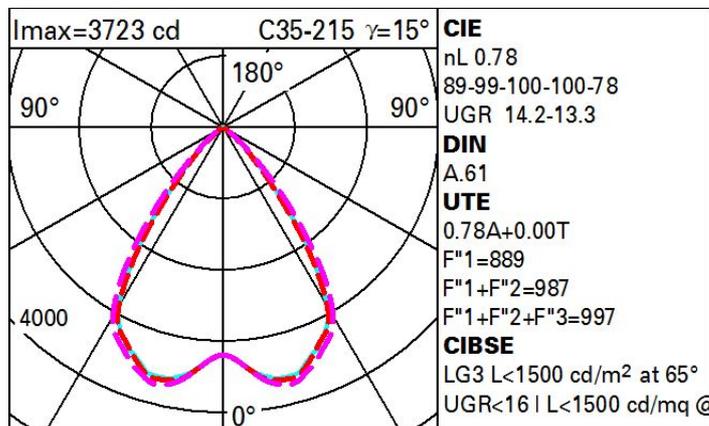
**Mounting**

dali track|three circuit track

Complies with EN60598-1 and pertinent regulations

**Technical data**

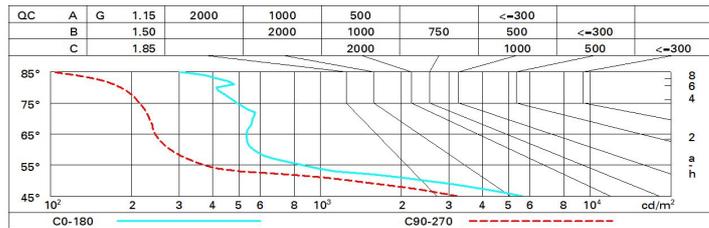
lm system:	4875	Lamp code:	LED
W system:	35	Number of lamps for optical assembly:	1
lm source:	6250	ZVEI Code:	LED
W source:	35	Number of optical assemblies:	1
Luminous efficiency (lm/W, real value):	139.3	Power factor:	See installation instructions
lm in emergency mode:	-	Inrush current:	10 A / - $\mu$ s
Total light flux at or above an angle of 90° [Lm]:	0	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 12 luminaires B16A: 20 luminaires C10A: 20 luminaires C16A: 34 luminaires
Light Output Ratio (L.O.R.) [%]:	78	Minimum dimming %:	1
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3500	Control:	DALI-2
MacAdam Step:	3		

**Polar**

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	59	56	61	58	58	55	70
1.0	70	66	63	61	65	62	62	59	76
1.5	75	72	69	67	71	69	68	65	84
2.0	78	75	74	72	74	73	72	69	89
2.5	79	78	76	75	76	75	74	72	92
3.0	81	79	78	77	78	77	76	74	94
4.0	82	81	80	79	79	79	77	75	96
5.0	82	82	81	80	80	79	78	76	97

Luminance curve limit



UGR diagram

Corrected UGR values (at 6250 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	14.0	15.3	14.9	15.0	15.8	13.8	14.5	14.1	14.7	15.0
	3H	14.5	15.2	14.8	15.4	15.7	13.6	14.3	14.0	14.6	14.8
	4H	14.5	15.1	14.8	15.4	15.7	13.6	14.2	13.9	14.5	14.8
	6H	14.4	15.0	14.8	15.3	15.6	13.5	14.0	13.9	14.4	14.7
	8H	14.4	14.9	14.8	15.2	15.6	13.5	14.0	13.8	14.3	14.7
12H	14.4	14.9	14.7	15.2	15.6	13.4	13.9	13.8	14.3	14.6	
4H	2H	14.4	15.0	14.8	15.3	15.6	13.6	14.2	13.9	14.5	14.8
	3H	14.3	14.8	14.7	15.2	15.5	13.5	14.0	13.9	14.3	14.7
	4H	14.3	14.7	14.7	15.1	15.5	13.4	13.8	13.8	14.2	14.6
	6H	14.2	14.6	14.6	15.0	15.4	13.3	13.7	13.7	14.1	14.5
	8H	14.2	14.5	14.6	14.9	15.4	13.3	13.6	13.7	14.0	14.5
12H	14.1	14.5	14.6	14.9	15.4	13.2	13.5	13.7	14.0	14.4	
8H	4H	14.1	14.5	14.6	14.9	15.3	13.3	13.7	13.7	14.1	14.5
	6H	14.1	14.4	14.6	14.8	15.3	13.2	13.5	13.7	14.0	14.4
	8H	14.1	14.3	14.5	14.8	15.3	13.2	13.4	13.7	13.9	14.4
	12H	14.0	14.2	14.5	14.7	15.2	13.1	13.4	13.6	13.8	14.4
12H	4H	14.1	14.4	14.5	14.8	15.3	13.3	13.6	13.7	14.0	14.5
	6H	14.0	14.3	14.5	14.8	15.2	13.2	13.4	13.7	13.9	14.4
	8H	14.0	14.2	14.5	14.7	15.2	13.2	13.4	13.7	13.9	14.4
Variations with the observer position at spacing:											
S =	1.0H	3.6 / -8.7					3.8 / -9.6				
	1.5H	6.3 / -9.7					6.2 / -10.3				
	2.0H	8.3 / -10.3					8.2 / -10.6				