


Polare

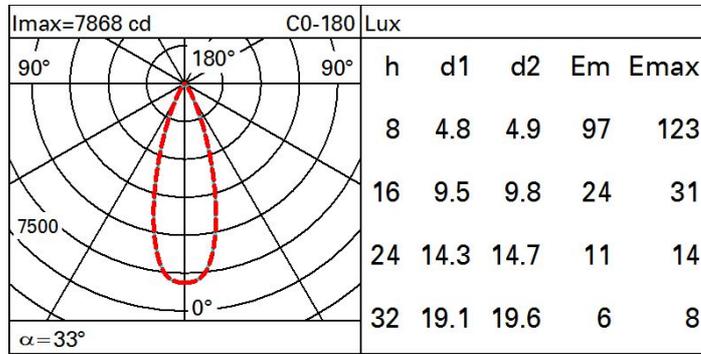

Isolux

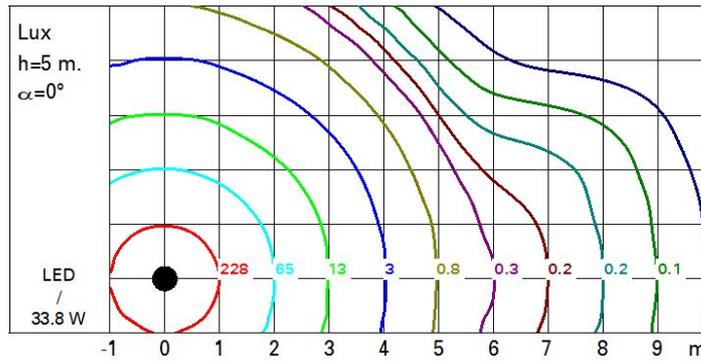


Diagramma UGR

Corrected UGR values (at 3950 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav	walls	work pl.	Room dim	x	y						
0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.70	0.70
0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.50	0.30
0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	9.8	10.4	10.1	10.6	10.8	9.8	10.3	10.1	10.6	10.8
	3H	10.0	10.5	10.3	10.7	11.0	9.7	10.2	10.0	10.4	10.7
	4H	10.0	10.4	10.3	10.7	11.0	9.6	10.1	9.9	10.4	10.7
	6H	9.9	10.3	10.2	10.7	11.0	9.5	10.0	9.9	10.3	10.6
	8H	9.9	10.3	10.2	10.6	11.0	9.5	9.9	9.9	10.3	10.6
	12H	9.8	10.2	10.2	10.6	10.9	9.5	9.9	9.8	10.2	10.6
4H	2H	9.6	10.1	10.0	10.4	10.7	9.9	10.4	10.2	10.7	11.0
	3H	9.8	10.2	10.2	10.6	10.9	9.8	10.2	10.2	10.5	10.9
	4H	9.8	10.2	10.2	10.5	10.9	9.7	10.1	10.1	10.5	10.9
	6H	9.7	10.1	10.2	10.5	10.9	9.7	10.0	10.1	10.4	10.8
	8H	9.7	10.0	10.1	10.4	10.8	9.6	9.9	10.1	10.3	10.8
	12H	9.7	9.9	10.1	10.3	10.8	9.6	9.9	10.1	10.3	10.7
8H	4H	9.7	10.0	10.1	10.4	10.8	9.6	9.9	10.1	10.3	10.8
	6H	9.6	9.9	10.1	10.3	10.8	9.6	9.8	10.0	10.3	10.7
	8H	9.6	9.8	10.1	10.3	10.8	9.5	9.7	10.0	10.2	10.7
	12H	9.5	9.7	10.1	10.2	10.7	9.5	9.7	10.0	10.1	10.7
12H	4H	9.7	9.9	10.1	10.4	10.8	9.6	9.9	10.0	10.3	10.7
	6H	9.6	9.8	10.1	10.3	10.8	9.5	9.7	10.0	10.2	10.7
	8H	9.5	9.7	10.0	10.2	10.7	9.5	9.7	10.0	10.1	10.7
Variations with the observer position at spacing:											
S =	1.0H	4.2 / -4.2					4.5 / -4.4				
	1.5H	6.8 / -5.7					7.1 / -5.9				
	2.0H	8.8 / -7.4					9.0 / -7.6				