

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	63	61	58	63	60	60	57	74
1.0	71	67	65	63	66	64	64	61	79
1.5	75	72	70	68	71	69	69	66	86
2.0	78	76	74	73	75	73	72	70	91
2.5	79	78	76	75	77	75	75	72	94
3.0	80	79	78	77	78	77	76	74	96
4.0	81	80	80	79	79	79	77	75	98
5.0	82	81	81	80	80	79	78	76	99

Curva límite de luminancia

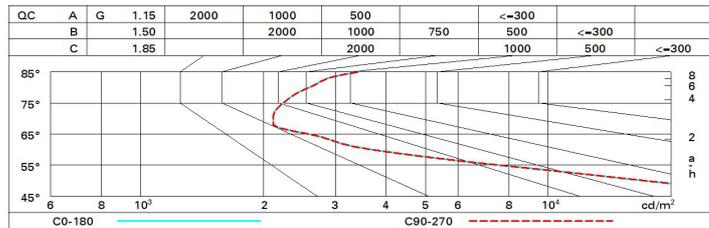


Diagrama UGR

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	21.3	22.8	21.8	23.1	23.4	21.3	22.8	21.8	23.1	23.4
	3H	21.2	22.3	21.5	22.6	22.9	21.2	22.3	21.5	22.6	22.9
	4H	21.1	22.1	21.4	22.4	22.8	21.1	22.1	21.4	22.4	22.8
	6H	20.9	22.1	21.3	22.4	22.8	20.9	22.1	21.3	22.4	22.8
	8H	20.9	22.0	21.3	22.4	22.7	20.9	22.0	21.3	22.4	22.7
	12H	20.8	22.0	21.3	22.3	22.7	20.8	21.9	21.2	22.3	22.7
4H	2H	21.1	22.1	21.4	22.4	22.8	21.1	22.1	21.4	22.4	22.8
	3H	20.8	22.0	21.3	22.3	22.7	20.8	22.0	21.3	22.3	22.7
	4H	20.7	21.8	21.2	22.2	22.6	20.7	21.8	21.2	22.2	22.6
	6H	20.6	21.8	21.0	22.2	22.6	20.6	21.8	21.0	22.2	22.6
	8H	20.5	21.8	21.0	22.2	22.7	20.5	21.8	20.9	22.2	22.7
	12H	20.4	21.8	20.9	22.3	22.8	20.3	21.8	20.8	22.2	22.7
8H	4H	20.5	21.8	20.9	22.2	22.7	20.5	21.8	21.0	22.2	22.7
	6H	20.3	21.6	20.8	22.1	22.6	20.3	21.7	20.8	22.1	22.6
	8H	20.3	21.5	20.8	22.0	22.5	20.3	21.5	20.8	22.0	22.5
	12H	20.4	21.3	20.9	21.7	22.3	20.4	21.2	20.9	21.7	22.3
12H	4H	20.3	21.8	20.8	22.2	22.7	20.4	21.8	20.9	22.3	22.8
	6H	20.3	21.5	20.8	22.0	22.5	20.3	21.5	20.8	22.0	22.5
	8H	20.4	21.2	20.9	21.7	22.3	20.4	21.3	20.9	21.7	22.3
Variations with the observer position at spacing:											
S =	1.0H	3.8 / -10.2					3.8 / -10.2				
	1.5H	6.5 / -12.2					6.5 / -12.2				
	2.0H	8.5 / -12.7					8.5 / -12.7				