
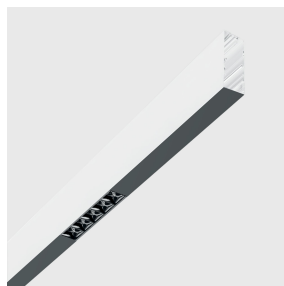


Last information update: April 2024

Product configuration: MJ61

MJ61: High Contrast module L=1197 - direct emission with controlled glare - LED - warm white integrated DALI dimmable control gear

**Product code**

MJ61: High Contrast module L=1197 - direct emission with controlled glare - LED - warm white integrated DALI dimmable control gear

Technical description

direct emission modular lighting system. High Contrast module with 2 groups of 5 elements using fixed optic LED lamps - flood beam angle. The structure of the optical system produces light emission with controlled glare (UGR < 19). Minimal (frameless) version extruded aluminium profile; partial black methacrylate screens set up for connection to end caps on both sides. Installation can be surface-mounted (ceiling/wall), or pendant. The module must be completed with the accessories kit needed for the selected type of installation. DALI dimmable electronic control gear integrated in the luminaire.

Installation

pendant: complete with power supply unit with cable (MWG5) and suspension cables (MWG6); surface-mounted: complete with supports (MWG7).

Colour

White (01) | Black (04) | Aluminium (12)

Weight (Kg)

2.02

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

the module is fitted with 5-pin terminal blocks for pass-through wiring at the ends. DALI dimmable control gear integrated in the module.


Notes

High Contrast modules may be completed with accessory end caps (code MX80) and used independently in the various applications. To make continuous lines, use accessory code MX81 with partial screen suitable for overlapping with other modules. Possibility of combined High Contrast / Low Contrast

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1782	MacAdam Step:	3
W system:	23.5	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
lm source:	1100	Lamp code:	LED
W source:	9.9	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	75.8	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	2
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	81	Inrush current:	53 A / 200 µs
Beam angle [°]:	46°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 8 luminaires B16A: 13 luminaires C10A: 13 luminaires C16A: 22 luminaires
CRI (minimum):	90	Minimum dimming %:	1
CRI (typical):	92	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2

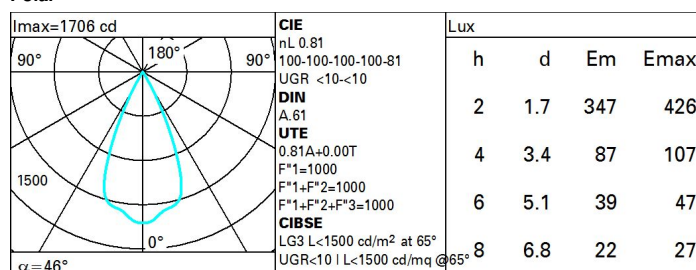Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	70	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	78	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	81	99
5.0	87	86	86	86	85	84	83	81	100

UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Riflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	0.8	1.2	1.0	1.5	1.7	0.8	1.2	1.0	1.5	1.7
	3H	0.6	1.1	0.9	1.3	1.6	0.6	1.1	0.9	1.3	1.6
	4H	0.6	1.0	0.9	1.2	1.5	0.6	1.0	0.9	1.2	1.5
	6H	0.5	0.9	0.8	1.2	1.5	0.5	0.9	0.8	1.2	1.5
	8H	0.5	0.8	0.8	1.1	1.5	0.5	0.8	0.8	1.1	1.5
	12H	0.4	0.8	0.8	1.1	1.4	0.4	0.8	0.8	1.1	1.4
4H	2H	0.6	1.0	0.9	1.2	1.5	0.6	1.0	0.9	1.2	1.5
	3H	0.4	0.8	0.8	1.1	1.4	0.4	0.8	0.8	1.1	1.4
	4H	0.3	0.6	0.7	1.0	1.4	0.3	0.6	0.7	1.0	1.4
	6H	0.2	0.5	0.7	0.9	1.3	0.2	0.5	0.7	0.9	1.3
	8H	0.2	0.4	0.6	0.8	1.3	0.2	0.4	0.6	0.8	1.3
	12H	0.1	0.4	0.6	0.8	1.2	0.1	0.4	0.6	0.8	1.2
8H	4H	0.2	0.4	0.6	0.8	1.3	0.2	0.4	0.6	0.8	1.3
	6H	0.1	0.3	0.6	0.7	1.2	0.1	0.3	0.6	0.7	1.2
	8H	0.0	0.2	0.5	0.7	1.2	0.0	0.2	0.5	0.7	1.2
	12H	-0.0	0.1	0.5	0.6	1.1	-0.0	0.1	0.5	0.6	1.1
12H	4H	0.1	0.4	0.6	0.8	1.2	0.1	0.4	0.6	0.8	1.2
	6H	0.0	0.2	0.5	0.7	1.2	0.0	0.2	0.5	0.7	1.2
	8H	-0.0	0.1	0.5	0.6	1.1	-0.0	0.1	0.5	0.6	1.1
Variations with the observer position at spacing:											
S =		0.8 / -21.9					0.8 / -21.9				
		1.5H / -22.0					1.5H / -22.0				
		2.0H / -22.2					2.0H / -22.2				