

Underscore InOut


Design iGuzzini

iGuzzini

Last information update: May 2024

Product configuration: EA02

EA02: Underscore InOut



Product code

EA02: Underscore InOut **Attention! Code no longer in production**

Colour

White (01)

Mounting

wall arm|wall surface|ceiling surface

Notes

Underscore InOut can be powered in series up to a maximum length of L=7004mm. The product is not suitable for installation in swimming pools and fountains. The lengths indicated can have a tolerance of +/- 4mm compared to the nominal length.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	280	Life Time LED 1:	50,000h - L70 - B20 (Ta 25°C)
W system:	8.5	Life Time LED 2:	30,000h - L70 - B20 (Ta 40°C)
Im source:	280	Voltage [Vin]:	24
W source:	8.5	Lamp code:	LED
Luminous efficiency (Im/W, real value):	32.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	73	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	100	Intervallo temperatura ambiente:	from -30°C to 45°C.
CRI (minimum):	80	LED current [mA]:	18
Colour temperature [K]:	2500	Control:	PWM
MacAdam Step:	3		

Polar

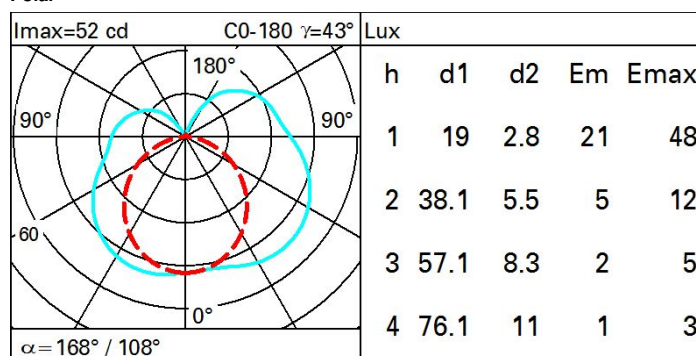

Isolux

