



Q198: Minimal 4 cells - Flood beam - LED




Im system:	584	CRI (minimum):	90
W system:	7.9	Colour temperature [K]:	3000
Im source:	730	MacAdam Step:	2
W source:	7.9	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	73.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
Beam angle [°]:	42°	LED current [mA]:	700

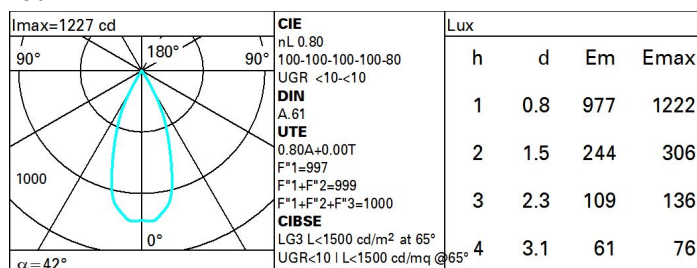

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	82	80	78	77	79	77	76	74	93
2.5	83	82	81	80	81	80	79	77	96
3.0	84	83	82	82	82	81	80	78	98
4.0	85	84	84	83	83	83	81	79	99
5.0	86	85	85	84	84	83	82	80	100

Luminance curve limit

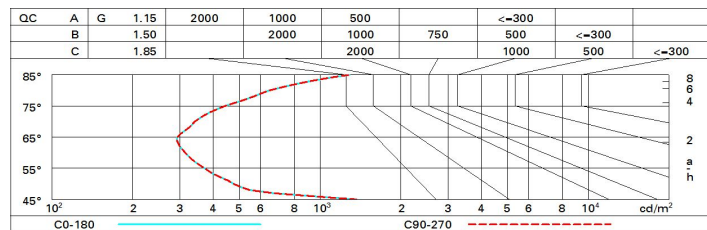

UGR diagram

Corrected UGR values (at 730 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	7.8	8.4	8.1	8.7	8.9	7.8	8.4	8.1	8.7	8.9
	3H	7.7	8.2	8.0	8.5	8.8	7.7	8.2	8.0	8.5	8.8
	4H	7.7	8.1	8.0	8.4	8.7	7.6	8.1	8.0	8.4	8.7
	6H	7.6	8.0	7.9	8.4	8.7	7.6	8.0	7.9	8.3	8.6
	8H	7.6	8.0	7.9	8.3	8.7	7.5	8.0	7.9	8.3	8.6
	12H	7.6	8.0	7.9	8.3	8.7	7.5	7.9	7.9	8.2	8.6
4H	2H	7.6	8.1	8.0	8.4	8.7	7.7	8.1	8.0	8.4	8.7
	3H	7.5	7.9	7.9	8.2	8.6	7.5	7.9	7.9	8.3	8.6
	4H	7.4	7.8	7.8	8.2	8.5	7.4	7.8	7.8	8.2	8.5
	6H	7.4	7.7	7.8	8.1	8.5	7.3	7.7	7.8	8.1	8.5
	8H	7.4	7.6	7.8	8.1	8.5	7.3	7.6	7.7	8.0	8.4
	12H	7.4	7.6	7.8	8.0	8.5	7.3	7.5	7.7	7.9	8.4
8H	4H	7.3	7.6	7.7	8.0	8.4	7.4	7.6	7.8	8.1	8.5
	6H	7.3	7.5	7.7	7.9	8.4	7.3	7.5	7.8	8.0	8.4
	8H	7.2	7.5	7.7	7.9	8.4	7.2	7.5	7.7	7.9	8.4
	12H	7.3	7.5	7.8	7.9	8.5	7.2	7.4	7.7	7.9	8.4
12H	4H	7.3	7.5	7.7	7.9	8.4	7.4	7.6	7.8	8.0	8.5
	6H	7.2	7.4	7.7	7.9	8.4	7.3	7.5	7.8	8.0	8.5
	8H	7.2	7.4	7.7	7.9	8.4	7.3	7.5	7.8	7.9	8.5
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -8.9					6.7 / -8.9				
	1.5H	9.5 / -9.1					9.5 / -9.1				
	2.0H	11.5 / -9.3					11.5 / -9.3				