

Last information update: June 2023

**Product configuration: P616**

P616: 600x600-Neutral White - UGR&lt;19

**Product code**P616: 600x600-Neutral White - UGR<19 **Attention! Code no longer in production****Technical description**

Recessed direct emission luminaire designed to use Neutral White colour 4,000K LEDs and be installed in 600x600 modular false ceilings or in plasterboard ceilings using a frame to be ordered as an accessory. Optical assembly with a white painted, extruded aluminium, tapered frame and a set back microprismatic screen for controlled luminance with a UGR<19 L<3000 cd/m<sup>2</sup> α≥ 65° beam, ideal for environments with video terminals. Product complete with electronic ballast.

**Installation**

recessed in 600x600 modular false ceilings or in plasterboard ceilings using a frame to be ordered as an accessory.

**Colour**

White (01)

**Mounting**

ceiling surface

**Wiring**

product complete with electronic components

Complies with EN60598-1 and pertinent regulations




IP20

IP43

On the visible part of the product once installed

**Technical data**


lm system:	3899.5	Colour temperature [K]:	4000
W system:	34	MacAdam Step:	3
lm source:	5200	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	28	Ballast losses [W]:	6
Luminous efficiency (lm/W, real value):	114.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	75	Number of optical assemblies:	1
CRI:	80		

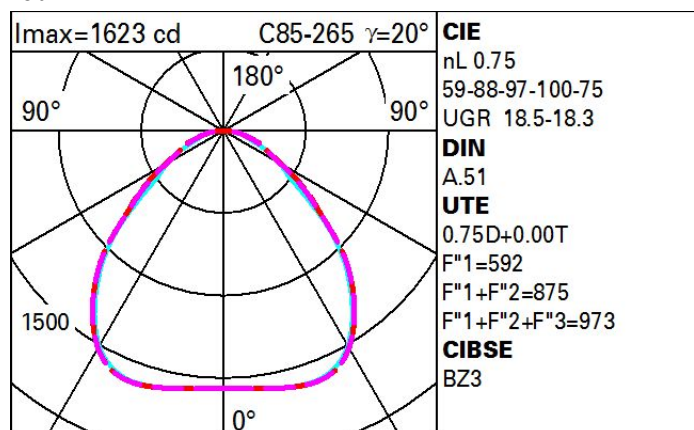**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	53	46	41	38	45	41	40	36	48
1.0	58	52	47	44	51	46	46	41	55
1.5	65	60	56	53	59	55	55	50	67
2.0	69	65	62	59	64	61	60	56	75
2.5	72	68	66	63	67	64	64	60	80
3.0	73	71	68	66	69	67	66	62	83
4.0	75	73	71	69	71	70	69	65	87
5.0	76	74	73	71	73	71	70	67	89

# Luminance curve limit

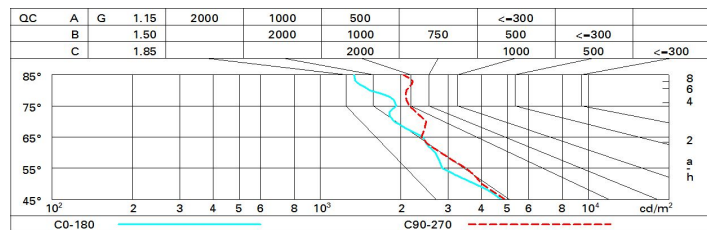

# UGR diagram

Corrected UGR values (at 5200 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	16.1	17.1	16.4	17.4	17.7	16.3	17.3	16.6	17.6	17.8
	3H	16.9	17.8	17.2	18.1	18.4	16.5	17.5	16.9	17.8	18.1
	4H	17.2	18.1	17.6	18.4	18.7	16.6	17.5	17.0	17.8	18.1
	6H	17.5	18.3	17.9	18.6	19.0	16.6	17.4	17.0	17.7	18.1
	8H	17.6	18.4	18.0	18.7	19.1	16.6	17.4	17.0	17.7	18.1
	12H	17.6	18.4	18.0	18.7	19.1	16.6	17.3	17.0	17.7	18.0
4H	2H	16.4	17.3	16.8	17.6	17.9	17.5	18.4	17.9	18.7	19.0
	3H	17.4	18.2	17.8	18.5	18.9	17.9	18.7	18.3	19.0	19.4
	4H	17.9	18.6	18.3	19.0	19.4	18.1	18.8	18.5	19.1	19.5
	6H	18.4	19.0	18.8	19.4	19.8	18.2	18.8	18.7	19.2	19.6
	8H	18.5	19.0	19.0	19.5	19.9	18.3	18.8	18.7	19.2	19.7
	12H	18.6	19.1	19.1	19.5	20.0	18.3	18.8	18.8	19.2	19.7
8H	4H	18.1	18.6	18.6	19.1	19.5	18.9	19.4	19.3	19.8	20.3
	6H	18.8	19.2	19.2	19.6	20.1	19.1	19.5	19.6	20.0	20.5
	8H	19.0	19.4	19.5	19.8	20.3	19.2	19.6	19.7	20.1	20.6
	12H	19.1	19.4	19.6	19.9	20.5	19.3	19.6	19.8	20.1	20.6
12H	4H	18.1	18.6	18.6	19.0	19.5	19.0	19.5	19.5	19.9	20.4
	6H	18.8	19.2	19.3	19.6	20.1	19.3	19.7	19.8	20.2	20.7
	8H	19.1	19.4	19.6	19.9	20.4	19.4	19.8	19.9	20.2	20.8
Variations with the observer position at spacing:											
S =	1.0H	0.3 / -0.4					0.3 / -0.4				
	1.5H	0.7 / -0.8					0.6 / -0.8				
	2.0H	1.3 / -1.1					1.3 / -1.1				