

iGuzzini

Last information update: December 2023

Product configuration: Q631

Q631: Palco LV spotlight Ø 37 - medium beam



Product code Q631: Palco LV spotlight Ø 37 - medium beam

Technical description

Miniaturised adjustable spotlight with adapter for installation on 48V low voltage track. Made of die-cast aluminium with passive dissipation system. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each spotlight mounted on the track to be regulated separately. The swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic unit guarantees a high level of visual comfort. Thermoplastic high definition lens with extra filter for variable optic. A rapid tool-free system for connecting the adapter electrically and mechanically to the track.

Installation

Mechanical fastening with adapter on track.

Colo	Colour		
White	(01)	Black	(04

Weight (Kg)

	vv
) Black (04)	0.

Mounting Low voltage track


Wiring Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.

Notes Technical and anti-glare accessories available.



Technical data			
Im system:	537	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	9.6	Ballast losses [W]:	1.5
Im source:	790	Lamp code:	LED
W source:	8.1	Number of lamps for optical	1
Luminous efficiency (Im/W,	56	assembly:	
real value):	ZVEI Code:	LED	
Im in emergency mode:	-	Number of optical	1
Total light flux at or above	0	assemblies:	
an angle of 90° [Lm]:		LED current [mA]:	650
Light Output Ratio (L.O.R.)	68	Power factor:	See installation instructions
[%]:		Minimum dimming %:	5
Beam angle [°]:	24°	Overvoltage protection:	2kV Common mode & 1kV
CRI (minimum):	90		Differential mode
Colour temperature [K]:	3000	Control:	DALI
MacAdam Step:	2		

Polar

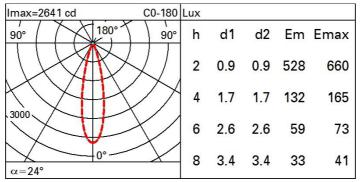

Q631_EN 1 / 1

