

Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	58	53	49	57	52	52	47	52
1.0	72	65	60	56	63	59	58	53	59
1.5	80	75	70	67	73	69	68	64	71
2.0	85	80	77	74	79	76	75	71	78
2.5	87	84	81	78	82	80	79	75	83
3.0	89	86	84	82	85	82	81	78	86
4.0	91	89	87	85	87	86	84	81	90
5.0	92	91	89	87	89	87	86	82	92

Courbe limite de luminance

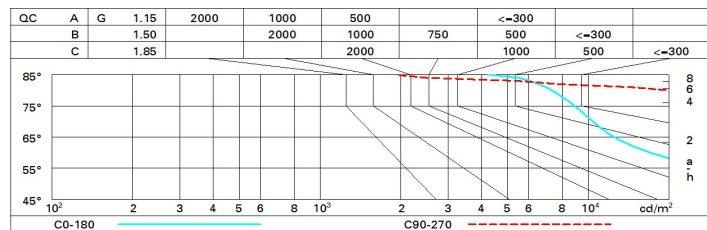


Diagramme UGR

Corrected UGR values (at 2800 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	25.3	26.2	25.6	26.4	26.7	30.6	31.4	30.9	31.7	31.9
	3H	25.2	26.0	25.5	26.3	26.6	30.6	31.4	30.9	31.6	31.9
	4H	25.2	25.9	25.5	26.2	26.5	30.5	31.3	30.9	31.6	31.9
	6H	25.1	25.8	25.5	26.1	26.4	30.4	31.1	30.8	31.4	31.8
	8H	25.1	25.7	25.5	26.1	26.4	30.4	31.1	30.8	31.4	31.7
	12H	25.1	25.7	25.4	26.0	26.4	30.4	31.0	30.8	31.3	31.7
4H	2H	26.0	26.7	26.3	27.0	27.3	31.7	32.4	32.0	32.7	33.0
	3H	25.9	26.6	26.3	26.9	27.3	31.9	32.5	32.3	32.8	33.2
	4H	25.9	26.4	26.3	26.8	27.2	31.9	32.4	32.3	32.8	33.2
	6H	25.9	26.3	26.3	26.7	27.2	31.8	32.3	32.2	32.7	33.1
	8H	25.8	26.3	26.3	26.7	27.1	31.8	32.2	32.2	32.6	33.1
	12H	25.8	26.2	26.2	26.6	27.1	31.7	32.1	32.2	32.6	33.0
8H	4H	26.1	26.5	26.5	26.9	27.4	32.0	32.4	32.4	32.8	33.2
	6H	26.0	26.4	26.5	26.8	27.3	31.9	32.3	32.4	32.8	33.2
	8H	26.0	26.3	26.5	26.8	27.3	31.9	32.2	32.4	32.7	33.2
	12H	26.0	26.2	26.5	26.7	27.2	31.9	32.1	32.4	32.6	33.2
12H	4H	26.1	26.5	26.5	26.9	27.4	31.9	32.3	32.4	32.7	33.2
	6H	26.1	26.4	26.5	26.8	27.3	31.9	32.2	32.4	32.7	33.2
	8H	26.0	26.3	26.5	26.8	27.3	31.9	32.2	32.4	32.6	33.2
Variations with the observer position at spacing:											
S =		1.0H					1.7 / -3.2				
		1.5H					2.7 / -5.4				
		2.0H					3.9 / -6.7				
							0.4 / -0.4				
							0.6 / -1.2				
							1.5 / -1.8				