

## Underscore InOut


Design iGuzzini

iGuzzini

Last information update: May 2024

### Product configuration: EA03

EA03: Underscore InOut



### Product code

EA03: Underscore InOut **Attention! Code no longer in production**

### Colour

White (01)

### Mounting

wall arm|wall surface|ceiling surface

### Notes

Underscore InOut can be powered in series up to a maximum length of L=7004mm. The product is not suitable for installation in swimming pools and fountains. The lengths indicated can have a tolerance of +/- 4mm compared to the nominal length.


Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	560	Life Time LED 1:	50,000h - L70 - B20 (Ta 25°C)
W system:	17	Life Time LED 2:	30,000h - L70 - B20 (Ta 40°C)
Im source:	560	Voltage [Vin]:	24
W source:	17	Lamp code:	LED
Luminous efficiency (Im/W, real value):	32.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	146	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	100	Intervalllo temperatura ambiente:	from -30°C to 45°C.
CRI:	80	LED current [mA]:	18
Colour temperature [K]:	2500	Control:	PWM
MacAdam Step:	3		

### Polar

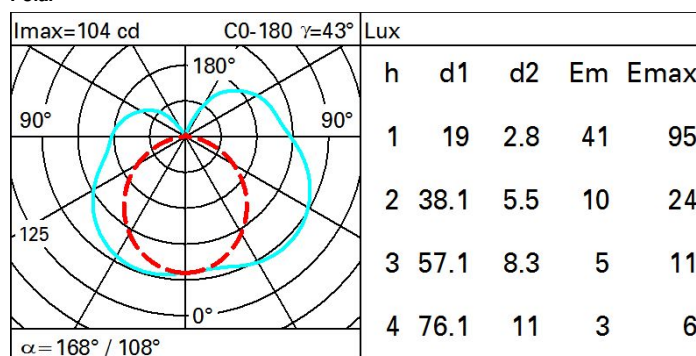

# Isolux

