


Isolux

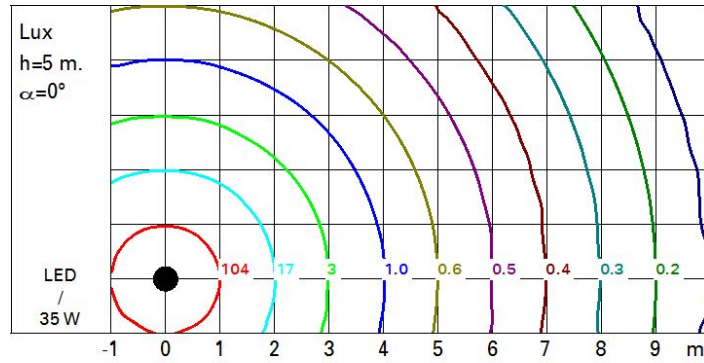

UGR diagram

Corrected UGR values (at 3350 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	11.7	13.7	12.1	14.0	14.4	11.7	13.7	12.1	14.0	14.4
	3H	12.2	13.3	12.5	13.6	13.9	12.3	13.4	12.6	13.7	14.0
	4H	12.2	13.0	12.6	13.3	13.6	12.4	13.2	12.7	13.5	13.8
	6H	12.2	12.7	12.6	13.0	13.4	12.4	12.9	12.8	13.2	13.5
	8H	12.1	12.8	12.5	13.1	13.5	12.3	13.0	12.7	13.3	13.6
	12H	12.0	12.9	12.4	13.2	13.6	12.2	13.0	12.6	13.4	13.8
4H	2H	12.4	13.2	12.7	13.5	13.8	12.2	13.0	12.6	13.3	13.6
	3H	12.7	13.6	13.1	13.9	14.3	12.6	13.5	13.0	13.8	14.2
	4H	12.5	13.8	13.0	14.2	14.7	12.5	13.8	13.0	14.2	14.7
	6H	12.3	14.1	12.7	14.5	15.0	12.3	14.1	12.8	14.6	15.0
	8H	12.1	14.1	12.6	14.6	15.1	12.2	14.1	12.7	14.6	15.1
	12H	12.1	14.0	12.6	14.4	15.0	12.1	14.0	12.6	14.5	15.0
8H	4H	12.2	14.1	12.7	14.6	15.1	12.1	14.1	12.6	14.6	15.1
	6H	12.2	13.7	12.7	14.2	14.7	12.2	13.7	12.7	14.2	14.7
	8H	12.3	13.4	12.8	13.9	14.4	12.3	13.4	12.8	13.9	14.4
	12H	12.4	13.0	13.0	13.5	14.0	12.4	13.0	13.0	13.5	14.0
12H	4H	12.1	14.0	12.6	14.5	15.0	12.1	14.0	12.6	14.4	15.0
	6H	12.3	13.4	12.8	13.9	14.4	12.3	13.4	12.8	13.9	14.4
	8H	12.4	13.0	13.0	13.5	14.0	12.4	13.0	13.0	13.5	14.0
Variations with the observer position at spacing:											
S =	1.0H	1.0 / -1.0					1.0 / -1.0				
	1.5H	2.1 / -2.1					2.1 / -2.1				
	2.0H	2.7 / -3.9					2.7 / -3.9				