

## Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: October 2024

### Product configuration: QE88

QE88: Frame 10 cells - Flood beam - LED



#### Product code

QE88: Frame 10 cells - Flood beam - LED

#### Technical description

Linear miniaturised recessed luminaire with 10 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen.

#### Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 186.

#### Colour

White (01) | Black / Black (43) | Black / White (47)

#### Weight (Kg)

0.55


#### Mounting

wall recessed|ceiling recessed

#### Wiring

On the power supply unit with terminal board is not included.

Complies with EN60598-1 and pertinent regulations



#### Technical data

lm system:	1826	Colour temperature [K]:	4000
W system:	20	MacAdam Step:	2
lm source:	2200	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	20	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	91.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	43°	LED current [mA]:	700
CRI (minimum):	90		


#### Polar

--

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

# Luminance curve limit

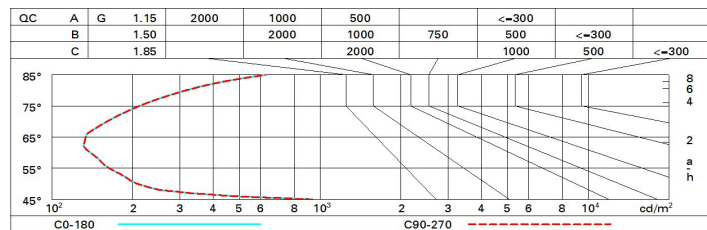

# UGR diagram

Corrected UGR values (at 2200 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	7.8	8.3	8.1	8.5	8.7	7.8	8.3	8.1	8.5	8.7
	3H	7.7	8.1	8.0	8.4	8.6	7.7	8.1	8.0	8.4	8.6
	4H	7.6	8.0	7.9	8.3	8.6	7.6	8.0	7.9	8.3	8.6
	6H	7.5	7.9	7.9	8.2	8.5	7.5	7.9	7.9	8.2	8.5
	8H	7.5	7.9	7.9	8.2	8.5	7.5	7.9	7.8	8.2	8.5
	12H	7.5	7.8	7.8	8.1	8.5	7.5	7.8	7.8	8.1	8.5
4H	2H	7.6	8.0	7.9	8.3	8.6	7.6	8.0	7.9	8.3	8.6
	3H	7.5	7.8	7.8	8.1	8.5	7.5	7.8	7.8	8.1	8.5
	4H	7.4	7.7	7.8	8.0	8.4	7.4	7.7	7.8	8.0	8.4
	6H	7.3	7.6	7.7	7.9	8.4	7.3	7.5	7.7	7.9	8.4
	8H	7.2	7.5	7.7	7.9	8.3	7.2	7.5	7.7	7.9	8.3
	12H	7.2	7.4	7.7	7.9	8.3	7.2	7.4	7.6	7.8	8.3
8H	4H	7.2	7.5	7.7	7.9	8.3	7.2	7.5	7.7	7.9	8.3
	6H	7.1	7.3	7.6	7.8	8.3	7.1	7.4	7.6	7.8	8.3
	8H	7.1	7.3	7.6	7.7	8.2	7.1	7.3	7.6	7.7	8.2
	12H	7.1	7.2	7.6	7.7	8.2	7.0	7.2	7.5	7.7	8.2
12H	4H	7.2	7.4	7.6	7.8	8.3	7.2	7.4	7.7	7.9	8.3
	6H	7.1	7.3	7.6	7.7	8.2	7.1	7.3	7.6	7.7	8.2
	8H	7.0	7.2	7.5	7.7	8.2	7.1	7.2	7.6	7.7	8.2
Variations with the observer position at spacing:											
S =	1.0H	7.0 / -14.5					7.0 / -14.5				
	1.5H	9.8 / -14.7					9.8 / -14.7				
	2.0H	11.8 / -14.8					11.8 / -14.8				