


Dernière mise à jour des informations: Décembre 2024

**Configuration du produit: BQ44**

BQ44: Mini - Wall-/Ceiling-mounted LED - 48V dc with DMX512-RDM control - L=1496mm - Wall Grazing Optic

**Référence produit**

BQ44: Mini - Wall-/Ceiling-mounted LED - 48V dc with DMX512-RDM control - L=1496mm - Wall Grazing Optic

**Description technique**

Direct light luminaire, designed to use RGBW LED lamps (Red, Green, Blue, White), 48V dc with DMX512-RDM control. Ceiling- and wall-mounted. Consists of a body, a box for DMX driver and supports for installation (to be ordered separately). Extruded aluminium body and side box, with zamak die-cast end caps complete with silicone seals. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate in RGBW (Red, Green, Blue, White), side box with 48V dc DMX512-RDM electronic driver (ballast to be ordered separately). Side box with double PG13.5 cable gland and outlet cables for pass-through wiring. Fitted with a PMMA diffusing filter and optics with plastic (methacrylate) lens for Wall Grazing lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Installation**

The following accessories are available for installation: adjustable wall-mounted arms in AISI304 stainless steel (200mm code BZJ8) and a plate for surface- or ceiling-mounting made of anodised aluminium (BZJ7).

**Coloris**

Gris (15)

**Poids (Kg)**

2.87

**Montage**

applique murale/en saillie au plafond

**Câblage**

The product is equipped with a nickel-plated brass PG13.5 double cable gland with H07RN-F rubber outlet cables 5x1.5mm<sup>2</sup> for pass-through wiring: each cable is set up both for the DMX-RDM signal and for 48V dc power supply. Available for electrical connection: IP68 5-pin linear connector (BZS6), cap for IP68 connectors + 120 Ohm terminating resistor (BZQ7), 48V dc DIN bar electronic ballasts to be ordered separately: 120W (BZ14), 240W (BZ15) and 480W (BZ16). DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (code BZQ7)

**Remarque**

Product complete with LED lamp. DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (code BZQ7)

Conforme à la norme EN60598-1 et à la réglementation en vigueur (ou à la réglementation relative)



IK05




IP66

**Données techniques**

|  |                               |  |                               |
|--|-------------------------------|--|-------------------------------|
| Im du système:                                   | 1494                          | Durée de vie LED 2:                      | 50,000h - L80 - B20 (Ta 40°C) |
| W du système:                                    | 37.9                          | Voltage [V]:                             | 48                            |
| Im source:                                       | 2720                          | Code Lampe:                              | LED                           |
| W source:  | 36                            | Nombre de lampes par groupe optique:     | 1                             |
| Efficacité lumineuse (Im/W, valeurs du système): | 39.4                          | Code ZVEI:                               | LED                           |
| Im en mode secours:                              | -                             | Nombre de groupes optiques:              | 1                             |
| Flux total émis à un angle de 90° ou plus [Lm]:  | 0                             | Plage de température ambiante opérative: | De -30°C à 50°C.              |
| Light Output Ratio (L.O.R.) [%]:                 | 55                            | LED Courant [mA]:                        | 235                           |
| Température de couleur [K]:                      | RGBW                          | Facteur de puissance:                    | Voir Notice de montage        |
| Durée de vie LED 1:                              | 50,000h - L80 - B10 (Ta 25°C) | Control:                                 | DMX-RDM                       |

Polaire

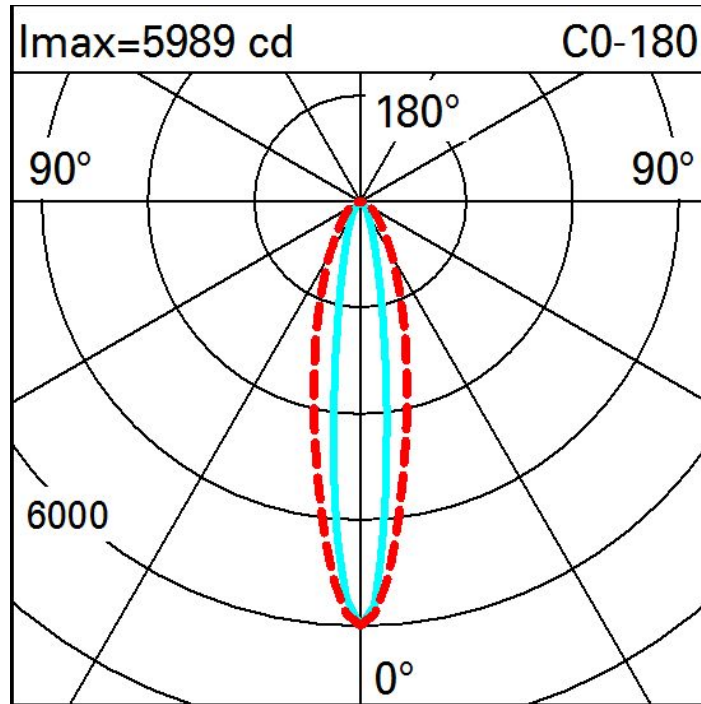

Eclairéments

| Lux |   | Wall distance = 1m |     |   |    |    |    |    |    |   |     |     |  |  |  |
|-----|---|--------------------|-----|---|----|----|----|----|----|---|-----|-----|--|--|--|
| 3   |   |                    |     |   |    |    |    |    |    |   |     |     |  |  |  |
|     |   | 0.3                | 0.6 | 1 | 3  | 7  | 10 | 7  | 4  | 2 | 0.7 | 0.4 |  |  |  |
| 2   |   | 1                  | 3   | 5 | 10 | 17 | 22 | 18 | 11 | 6 | 3   | 2   |  |  |  |
|     |   | 2                  | 4   | 7 | 14 | 23 | 29 | 24 | 15 | 8 | 5   | 3   |  |  |  |
| 1   |   | 3                  | 5   | 8 | 14 | 23 | 29 | 24 | 16 | 9 | 5   | 3   |  |  |  |
|     |   | 3                  | 5   | 9 | 14 | 20 | 25 | 21 | 15 | 9 | 6   | 3   |  |  |  |
| 0   |   |                    |     |   |    |    |    |    |    |   |     |     |  |  |  |
|     | m | -2                 | -1  | 0 | 1  | 2  | 3  |    |    |   |     |     |  |  |  |