

Laser Blade XS

iGuzzini

iGuzzini

Last information update: July 2025

Product configuration: QJ32
QJ32: Minimal 10 cells - Wide Flood beam - LED

Q.J32: Minimal 10 cells - Wide Flood beam - LED



Technical description

Installation

Colour

Weight (Kg)

0.46

* Colours on request

mounting
wall recessed|ceiling recessed

On the power supply unit with terminal board included.

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.

Complies with EN60598-1 and pertinent regulations




Im system:	1494	Colour temperature [K]:	3000
W system:	23.1	MacAdam Step:	2
Im source:	1800	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	20	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	64.7	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	58°	Control:	DALI-2
CRI (minimum):	90		

	CIE nL 0.83 100-100-100-100-83 UGR 16.3-16.3 DIN A.61 UTE 0.83A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<19 L<1500 cd/mq @65°	Lux			
	h	d	Em	Emax	
	2	2.2	378	472	
	4	4.4	95	118	
	6	6.7	42	52	
8	8.9	24	30		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

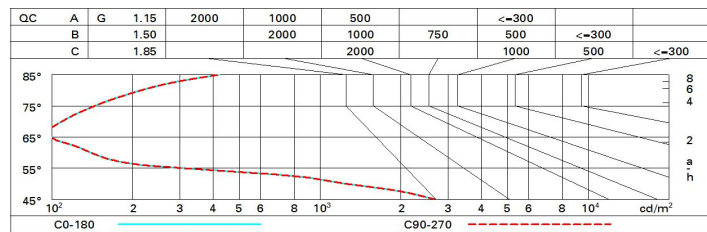

UGR diagram

Corrected UGR values (at 1800 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	10.9	17.3	17.2	17.0	17.8	10.9	17.3	17.2	17.0	17.8
	3H	10.8	17.2	17.1	17.4	17.7	10.8	17.2	17.1	17.4	17.7
	4H	10.7	17.1	17.0	17.4	17.7	10.7	17.1	17.0	17.4	17.7
	6H	10.6	17.0	17.0	17.3	17.6	10.6	17.0	17.0	17.3	17.6
	8H	10.6	16.9	16.9	17.2	17.6	10.6	16.9	16.9	17.2	17.6
	12H	10.5	16.9	16.9	17.2	17.6	10.5	16.9	16.9	17.2	17.6
4H	2H	10.7	17.1	17.0	17.4	17.7	10.7	17.1	17.0	17.4	17.7
	3H	10.5	16.9	16.9	17.2	17.6	10.5	16.9	16.9	17.2	17.6
	4H	10.4	16.7	16.8	17.1	17.5	10.4	16.7	16.8	17.1	17.5
	6H	10.4	16.6	16.8	17.0	17.4	10.4	16.6	16.8	17.0	17.4
	8H	10.3	16.5	16.7	17.0	17.4	10.3	16.5	16.7	17.0	17.4
	12H	10.3	16.5	16.7	16.9	17.4	10.3	16.5	16.7	16.9	17.4
8H	4H	10.3	16.5	16.7	17.0	17.4	10.3	16.5	16.7	17.0	17.4
	6H	10.2	16.4	16.7	16.9	17.3	10.2	16.4	16.7	16.9	17.3
	8H	10.2	16.3	16.6	16.8	17.3	10.2	16.3	16.6	16.8	17.3
	12H	10.1	16.2	16.6	16.7	17.3	10.1	16.2	16.6	16.7	17.2
12H	4H	10.3	16.5	16.7	16.9	17.4	10.3	16.5	16.7	16.9	17.4
	6H	10.2	16.3	16.6	16.8	17.3	10.2	16.3	16.6	16.8	17.3
	8H	10.1	16.2	16.6	16.7	17.2	10.1	16.2	16.6	16.7	17.3
Variations with the observer position at spacing:											
S =		1.0H					0.5 / -24.9				
		1.5H					9.4 / -25.6				
		2.0H					11.4 / -25.8				