

Easy

Design iGuzzini

iGuzzini

Last information update: February 2025

Product configuration: QU30

QU30: Ø 172 mm - neutral - electronic



Product code

QU30: Ø 172 mm - neutral - electronic

Technical description

A round luminaire that can be surface or pendant-mounted using a kit to be ordered separately. The product is designed to use LED lamps with C.o.B. technology. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. The product is fitted with a passive dissipation system. Luminaire complete with LED lamp in neutral colour tone (4000K). General lighting beam.

Installation

surface or pendant-mounted using a kit to be ordered as an accessory.

Colour

White / Aluminium (39) | Black / Aluminium (40)

Weight (Kg)

1.03

Mounting

ceiling surface

Wiring

product complete with dali components

Complies with EN60598-1 and pertinent regulations



IP40



pending

Technical data

lm system:	3060	Colour temperature [K]:	4000
W system:	24.5	MacAdam Step:	2
lm source:	3400	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	21	Lamp code:	LED
Luminous efficiency (lm/W, real value):	124.9	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	90	Control:	DALI-2
CRI (minimum):	80		

Polar

	Lux			
	h	d	Em	E _{max}
	2	3.2	378	509
	4	6.4	94	127
	6	9.5	42	57
	8	12.7	24	32

Imax=2057 cd

90° 180° 90°

2000

0°


α = 77° / 78°

CIE
nL 0.90
85-100-100-100-90
UGR 21.5-21.6
DIN
A 61
UTE
0.90A+0.00T
F*1=846
F*1+F*2=996
F*1+F*2+F*3=1000
CIBSE
LG3 L<3000 cd/m² at 65°

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	69	65	62	68	64	64	60	67
1.0	80	74	71	68	73	70	70	66	73
1.5	86	82	79	76	81	78	77	74	82
2.0	89	86	84	82	85	83	82	79	88
2.5	91	89	87	86	88	86	85	82	91
3.0	93	91	89	88	89	88	87	84	93
4.0	94	92	91	90	91	90	89	86	95
5.0	95	94	92	92	92	91	90	87	97

Luminance curve limit

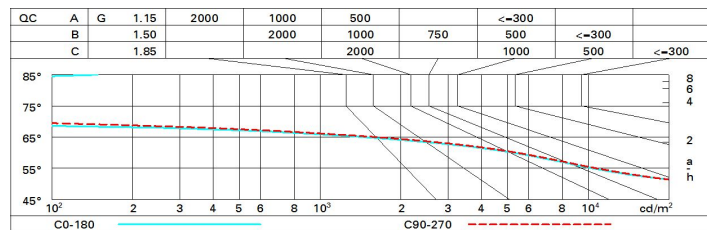

UGR diagram

Corrected UGR values (at 3400 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	22.0	22.8	22.3	23.0	23.3	22.1	22.9	22.4	23.1	23.4
	3H	21.9	22.6	22.2	22.8	23.1	22.0	22.7	22.3	23.0	23.2
	4H	21.8	22.4	22.1	22.7	23.0	21.9	22.6	22.3	22.9	23.2
	6H	21.7	22.3	22.1	22.6	23.0	21.8	22.4	22.2	22.7	23.1
	8H	21.7	22.3	22.1	22.6	22.9	21.8	22.4	22.2	22.7	23.0
	12H	21.7	22.2	22.0	22.5	22.9	21.8	22.3	22.2	22.6	23.0
4H	2H	21.8	22.5	22.2	22.8	23.1	21.9	22.5	22.2	22.8	23.1
	3H	21.7	22.2	22.1	22.6	22.9	21.8	22.3	22.2	22.6	23.0
	4H	21.6	22.1	22.0	22.4	22.8	21.7	22.2	22.1	22.5	22.9
	6H	21.5	21.9	21.9	22.3	22.7	21.6	22.0	22.0	22.4	22.8
	8H	21.5	21.8	21.9	22.2	22.7	21.6	21.9	22.0	22.3	22.8
	12H	21.4	21.8	21.9	22.2	22.6	21.5	21.8	22.0	22.3	22.7
8H	4H	21.5	21.8	21.9	22.2	22.7	21.6	21.9	22.0	22.3	22.8
	6H	21.4	21.7	21.8	22.1	22.6	21.5	21.8	21.9	22.2	22.7
	8H	21.3	21.6	21.8	22.0	22.5	21.4	21.7	21.9	22.1	22.6
	12H	21.3	21.5	21.8	22.0	22.5	21.4	21.6	21.9	22.1	22.6
12H	4H	21.4	21.8	21.9	22.2	22.6	21.5	21.8	22.0	22.3	22.7
	6H	21.3	21.6	21.8	22.0	22.5	21.4	21.7	21.9	22.1	22.6
	8H	21.3	21.5	21.8	22.0	22.5	21.4	21.6	21.9	22.1	22.6
Variations with the observer position at spacing:											
S =	1.0H	2.6 / -8.8					2.5 / -8.2				
	1.5H	5.1 / -16.0					5.0 / -14.9				
	2.0H	7.1 / -33.7					7.0 / -28.7				