


Last information update: February 2025

Product configuration: RG40

RG40: Pendant Tecnica Evo - Ø117 body - DALI



Product code

RG40: Pendant Tecnica Evo - Ø117 body - DALI

Technical description

Pendant luminaire fitted with an adapter for installation on an electrified DALI track. LED lamp with high color rendering index. Die-cast aluminium luminaire. Optical system with high performance P.V.D. (Physical Vapour Deposition) anti-scratch aluminium reflector that offers an excellent light efficiency ratio. Balanced pendant system with double steel cable and adjustment system. Fitted with mechanical aiming locks, so rotation and tilting movements can be locked in position to ensure efficient light aiming even after the original installation or during maintenance. Integrated DALI dimmable power supply unit. Designed to house other optical accessories in the Tecnica Evo range. Interchangeable reflectors are available, which allow the emission angle to be varied as required, even after the original installation.

Installation

Installation on an electrified track.

Colour

White (01) | Black (04)

Weight (Kg)

1.53

Mounting

dali track

Wiring

Built-in DALI dimmable power supply.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	4427	CRI (minimum):	90
W system:	38.2	Colour temperature [K]:	3000
lm source:	4660	MacAdam Step:	2
W source:	34	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	115.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	95	Number of optical assemblies:	1
Beam angle [°]:	52°	Control:	DALI-2


Polar

<p>Imax=6465 cd 90° 180° 90° 6000 0° α=52°</p>	<p>CIE nL 0.95 97-100-100-100-95 UGR 19.1-19.1 DIN A.61 UTE 0.95A+0.00T F*1=969 F*1+F*2=997 F*1+F*2+F*3=1000</p>	Lux			
		h	d	Em	Emax
		2	2	1235	1616
		4	3.9	309	404
		6	5.9	137	180
8	7.8	77	101		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	85	80	76	74	79	76	76	72	76
1.0	88	84	81	79	83	81	80	77	81
1.5	93	90	88	86	89	87	86	83	87
2.0	96	94	92	91	93	91	90	87	92
2.5	98	96	95	94	95	94	93	90	95
3.0	99	98	97	96	97	96	94	92	97
4.0	101	100	99	98	98	97	96	94	99
5.0	101	101	100	100	99	98	97	95	100

Luminance curve limit

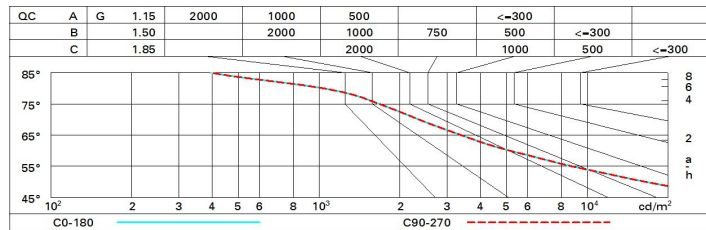

UGR diagram

Corrected UGR values (at 4060 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	19.6	20.2	19.9	20.5	20.7	19.6	20.2	19.9	20.5	20.7
	3H	19.5	20.1	19.8	20.3	20.6	19.5	20.1	19.8	20.3	20.6
	4H	19.4	19.9	19.8	20.2	20.5	19.4	19.9	19.8	20.2	20.5
	6H	19.4	19.8	19.7	20.1	20.5	19.4	19.8	19.7	20.1	20.5
	8H	19.3	19.8	19.7	20.1	20.4	19.3	19.8	19.7	20.1	20.4
	12H	19.3	19.7	19.7	20.1	20.4	19.3	19.7	19.7	20.1	20.4
4H	2H	19.4	19.9	19.8	20.2	20.5	19.4	19.9	19.8	20.2	20.5
	3H	19.3	19.7	19.7	20.1	20.4	19.3	19.7	19.7	20.1	20.4
	4H	19.2	19.6	19.6	20.0	20.3	19.2	19.6	19.6	20.0	20.3
	6H	19.1	19.5	19.6	19.9	20.3	19.1	19.5	19.6	19.9	20.3
	8H	19.1	19.4	19.5	19.8	20.2	19.1	19.4	19.5	19.8	20.2
	12H	19.0	19.3	19.5	19.7	20.2	19.0	19.3	19.5	19.7	20.2
8H	4H	19.1	19.4	19.5	19.8	20.2	19.1	19.4	19.5	19.8	20.2
	6H	19.0	19.2	19.5	19.7	20.2	19.0	19.2	19.5	19.7	20.2
	8H	18.9	19.2	19.4	19.6	20.1	18.9	19.2	19.4	19.6	20.1
	12H	18.9	19.1	19.4	19.6	20.1	18.9	19.1	19.4	19.6	20.1
12H	4H	19.0	19.3	19.5	19.7	20.2	19.0	19.3	19.5	19.7	20.2
	6H	18.9	19.2	19.4	19.6	20.1	18.9	19.2	19.4	19.6	20.1
	8H	18.9	19.1	19.4	19.6	20.1	18.9	19.1	19.4	19.6	20.1
Variations with the observer position at spacing:											
S =	1.0H	5.5 / -10.6					5.5 / -10.6				
	1.5H	8.3 / -13.6					8.3 / -13.6				
	2.0H	10.3 / -15.0					10.3 / -15.0				