


Last information update: May 2024

Product configuration: Q440

Q440: Minimal Angular Module - Down Office / Working UGR < 19 - Neutral LED

**Product code**Q440: Minimal Angular Module - Down Office / Working UGR < 19 - Neutral LED **Attention! Code no longer in production****Technical description**

Angular element for Minimal (frameless) flush with ceiling version profiles; including a Neutral LED module. Microprismatic screen for controlled luminance emission UGR < 19 - 3000 cd/m² (working lighting); screen set up for connecting several lengths by overlapping. Integrated control gear. Pass-through wiring for continuous lines:

Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately.

Colour

White (01) | Aluminium (12)

Weight (Kg)

5

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

The angular profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks to simplify connections between the luminaires. LED module complete with integrated electronic control gear.

Notes

Take care when configuring the system; to complete a continuous line with an angular profile correctly, two initial modules are required, one for each side of the corner.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1944	Colour temperature [K]:	4000
W system:	16	MacAdam Step:	3
Im source:	1350	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	6.8	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	121.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	72	Number of optical assemblies:	2
CRI (minimum):	80		


Polar

Imax=607 cd		C0-180		CIE		Lux	
90°	180°	90°	0°	nL 0.72	66-90-98-100-72	h	d1 d2 Em Emax
				UGR 17.7-18.0	DIN A.51	1	1.3 1.6 422 607
				UTE 0.72C+0.00T	F*1=662	2	2.7 3.2 105 152
				F*1+F*2=902	F*1+F*2+F*3=980	3	4 4.9 47 67
				CIBSE LG3 L<3000 cd/m ² at 65°	UGR<19 L<3000 cd/mq @65°	4	5.4 6.5 26 38
α = 68° / 78°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	47	43	40	47	43	42	38	53
1.0	58	52	48	45	51	48	47	43	60
1.5	64	60	56	53	59	56	55	51	71
2.0	68	64	61	59	63	61	60	56	78
2.5	70	67	65	63	66	64	63	60	83
3.0	71	69	67	65	68	66	65	62	86
4.0	73	71	70	68	70	68	67	64	89
5.0	74	72	71	70	71	70	69	66	91

Luminance curve limit

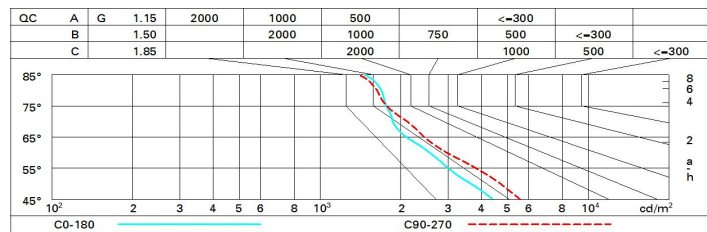

UGR diagram

Corrected UGR values (at 1350 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	15.4	16.4	15.7	16.6	16.9	16.5	17.5	16.8	17.7	18.0
	3H	16.1	17.0	16.4	17.3	17.6	16.7	17.6	17.0	17.8	18.1
	4H	16.4	17.3	16.8	17.6	17.9	16.7	17.5	17.1	17.8	18.2
	6H	16.7	17.5	17.1	17.8	18.2	16.7	17.5	17.1	17.8	18.1
	8H	16.8	17.6	17.2	17.9	18.3	16.7	17.4	17.1	17.7	18.1
	12H	16.9	17.6	17.3	17.9	18.3	16.7	17.3	17.0	17.7	18.1
4H	2H	15.8	16.6	16.2	16.9	17.2	17.4	18.2	17.7	18.5	18.8
	3H	16.7	17.4	17.1	17.7	18.1	17.7	18.4	18.1	18.8	19.1
	4H	17.1	17.7	17.5	18.1	18.5	17.8	18.5	18.3	18.8	19.2
	6H	17.5	18.1	18.0	18.5	18.9	17.9	18.5	18.4	18.9	19.3
	8H	17.7	18.2	18.1	18.6	19.0	18.0	18.5	18.4	18.9	19.3
	12H	17.8	18.2	18.2	18.7	19.1	17.9	18.4	18.4	18.8	19.3
8H	4H	17.3	17.8	17.7	18.2	18.6	18.2	18.7	18.7	19.2	19.6
	6H	17.8	18.2	18.3	18.7	19.1	18.5	18.9	18.9	19.3	19.8
	8H	18.0	18.4	18.5	18.9	19.4	18.5	18.9	19.0	19.4	19.9
	12H	18.2	18.5	18.7	19.0	19.5	18.6	18.9	19.1	19.4	19.9
12H	4H	17.3	17.7	17.7	18.2	18.6	18.3	18.8	18.8	19.2	19.7
	6H	17.8	18.2	18.3	18.7	19.2	18.6	18.9	19.0	19.4	19.9
	8H	18.1	18.4	18.6	18.9	19.4	18.7	19.0	19.2	19.5	20.0
Variations with the observer position at spacing:											
S =	1.0H	0.4 / -0.5					0.3 / -0.4				
	1.5H	0.5 / -1.0					0.7 / -1.2				
	2.0H	1.1 / -1.4					1.6 / -1.6				