


Last information update: November 2023

Product configuration: MP93

MP93: Medium body spotlight - warm white - electronic ballast and dimmer - wide flood optic

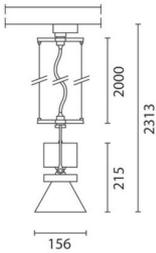

Product code

MP93: Medium body spotlight - warm white - electronic ballast and dimmer - wide flood optic **Attention! Code no longer in production**

Technical description

Pendant luminaire equipped with a multiphase adapter made of die-cast aluminium and thermoplastic material. The pendant system consists of steel cables L=2000 that provide a simple mechanical anchoring system. Having been rotated and tilted, the luminaire can be locked mechanically in position to ensure efficient light aiming (even during maintenance operations). Luminaire for high output LED lamp with monochrome emission in a warm white colour tone (3000K) . Dimmable electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

Installation

Mounted on an electrified track with a multiphase adapter.

Colour

White (01) | Grey / Black (74)

Mounting

ceiling pendant

Wiring

The dimmable electronic components are housed in the luminaire.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2188	CRI (minimum):	80
W system:	24	Colour temperature [K]:	3000
Im source:	3000	MacAdam Step:	3
W source:	21	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	91.2	Ballast losses [W]:	3
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	73	ZVEI Code:	LED
Beam angle [°]:	48°	Number of optical assemblies:	1


Polar

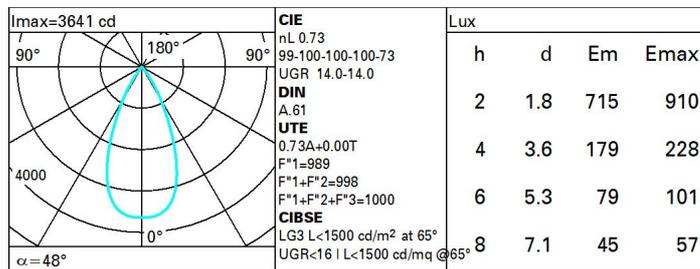

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	60	58	62	59	59	57	78
1.0	68	65	63	61	65	63	62	60	82
1.5	72	70	68	66	69	67	66	64	88
2.0	74	73	71	70	71	70	70	68	93
2.5	76	74	73	72	73	72	72	70	95
3.0	77	76	75	74	74	74	73	71	97
4.0	77	77	76	76	76	75	74	72	99
5.0	78	77	77	77	76	76	75	73	100

Luminance curve limit

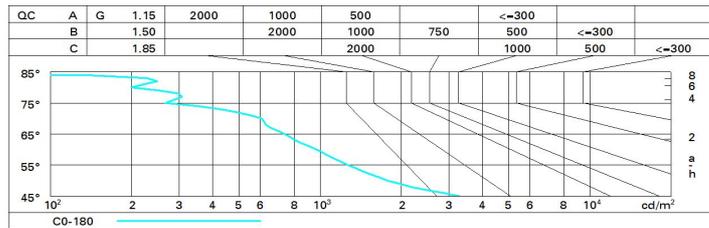

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	14.5	15.1	14.8	15.3	15.5	14.5	15.1	14.8	15.3	15.5
	3H	14.4	14.9	14.7	15.2	15.4	14.4	14.9	14.7	15.2	15.4
	4H	14.3	14.8	14.7	15.1	15.4	14.3	14.8	14.7	15.1	15.4
	6H	14.3	14.7	14.6	15.0	15.3	14.2	14.7	14.6	15.0	15.3
	8H	14.2	14.6	14.6	15.0	15.3	14.2	14.6	14.6	15.0	15.3
	12H	14.2	14.6	14.6	14.9	15.3	14.2	14.6	14.5	14.9	15.3
4H	2H	14.3	14.8	14.7	15.1	15.4	14.3	14.8	14.7	15.1	15.4
	3H	14.2	14.6	14.6	14.9	15.3	14.2	14.6	14.6	14.9	15.3
	4H	14.1	14.4	14.5	14.8	15.2	14.1	14.4	14.5	14.8	15.2
	6H	14.0	14.3	14.4	14.7	15.1	14.0	14.3	14.4	14.7	15.1
	8H	14.0	14.2	14.4	14.7	15.1	14.0	14.2	14.4	14.7	15.1
	12H	13.9	14.2	14.4	14.6	15.1	13.9	14.2	14.4	14.6	15.1
8H	4H	14.0	14.2	14.4	14.7	15.1	14.0	14.2	14.4	14.7	15.1
	6H	13.9	14.1	14.3	14.5	15.0	13.9	14.1	14.3	14.5	15.0
	8H	13.8	14.0	14.3	14.5	15.0	13.8	14.0	14.3	14.5	15.0
	12H	13.8	13.9	14.3	14.4	14.9	13.8	13.9	14.3	14.4	14.9
12H	4H	13.9	14.2	14.4	14.6	15.1	13.9	14.2	14.4	14.6	15.1
	6H	13.8	14.0	14.3	14.5	15.0	13.8	14.0	14.3	14.5	15.0
	8H	13.8	13.9	14.3	14.4	14.9	13.8	13.9	14.3	14.4	14.9
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -14.2					6.1 / -14.2				
	1.5H	8.9 / -15.7					8.9 / -15.7				
	2.0H	10.9 / -16.4					10.9 / -16.4				