

**LEDPLUS ALL GLASS  
SQUARE**

**#1.2620 - 00**  
FINISH


**LAMPING:** COOL WHITE LED 6700K, 24Vdc

LEDPLUS is a ground / wall recessed luminaire flush with the surface. It is made of high resistance thermoplastic with an extraclear glass lens. Two different types of outer casings are available for installation.


**PROJECT NAME:** \_\_\_\_\_

**TYPE:** \_\_\_\_\_ **QTY:** \_\_\_\_\_


LAST UPDATE: August 15, 2019



**ISOMETRIC  
VIEW**

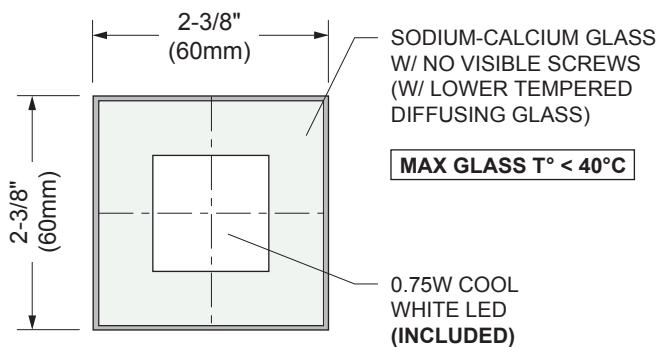

**TOP VIEW**

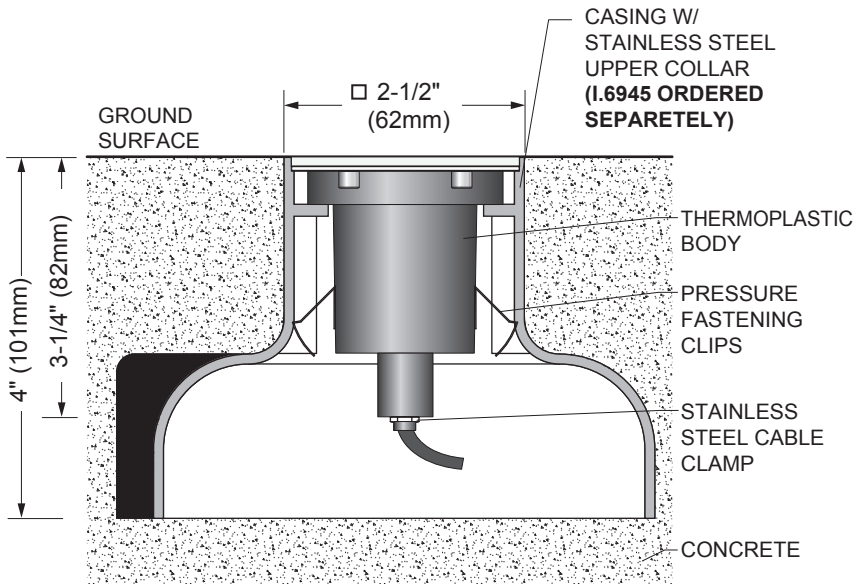

**FRONT VIEW**

**IP 68 IK 08**

**PLEASE CONTACT FACTORY FOR GREEN OR AMBER LED COLOR OPTION**

**USE SUITABLE REMOTE POWER SUPPLY**

**FINISH**

**00 - FROSTED GLASS**

**ACCESSORIES (TO BE ORDERED SEPARATELY)**

- I.6944** - ALUMINUM CASING FOR WALL INSTALLATION + TOP END CAP □6-11/16"(169mm) X 4"(101mm)H
- I.6945** - ALUMINUM CASING FOR GROUND INSTALLATION + TOP END CAP □5-1/8"(129mm) X 4"(101mm)H
- I.6946** - PLASTIC CASING FOR WALL & GROUND INSTALLATION +TOP END CAP Ø2-1/2" (62mm) X 6-1/8" (155mm)H
- I.9579** - ADAPTER FOR OUTER CASING (FOR I.6946)
- I.9580** - ADAPTER FOR OUTER CASING (FOR I.6944 - I.6945)
- I.9583** - SUCTION CUP

**POWER SUPPLY OPTIONS**

**Dry location**

- 4444-0024-010-120-ND:**  
Input: 120V AC, Dry location, non dimmable  
Quantity: one to fourteen (1 to 14) fixtures  
DIM: 6" X 4" X 3" (152 X 102 X 76mm)  
Max distance 18AWG: 20ft (6m)\*.
- 4444-0024-020-120-ND:**  
Input: 120V AC, Dry location, non dimmable  
Quantity: one to twenty four (1 to 26) fixtures  
DIM: 6" X 4" X 3" (152 X 102 X 76mm)  
Max distance 18AWG: 85ft (25m)\*.
- 4444-0024-025-UNV-ND:**  
Input: 120-277V AC, Dry location, non dimmable  
Quantity: one to thirty five (1 to 35) fixtures  
DIM: 6" X 4" X 3" (152 X 102 X 76mm)  
Max distance 18AWG: 20ft (6m)\*.

**Wet location**

- 4548-0024-010-120-ND:**  
Input: 120V AC, Wet location, non dimmable  
Quantity: one to fourteen (1 to 14) fixtures  
DIM: 7 1/8" X 4 1/4" X 3" (181 X 108 X 76mm)  
Max distance 18AWG: 20ft (6m)\*.
- 4548-0024-017-120-ND:**  
Input: 120V AC, Wet location, non dimmable  
Quantity: one to twenty four (1 to 24) fixtures  
DIM: 7 1/8" X 4 1/4" X 3" (181 X 108 X 76mm)  
Max distance 18AWG: 85ft (25m)\*.
- 4548-0024-025-UNV-ND:**  
Input: 120-277V AC, Wet location, non dimmable  
Quantity: one to thirty five (1 to 35) fixtures  
DIM: 7 1/8" X 4 1/4" X 3" (181 X 108 X 76mm)  
Max distance 18AWG: 20ft (6m)\*.

\*For longer remote mounting distance, contact factory.



9320 Boul. St-Laurent,  
suite 100, Montréal (Québec)  
Canada H2N 1N7  
P.: 514.523.1339 F.: 514.525.6107



**LEDPLUS ALL GLASS  
ROUND**