



Last information update: May 2024

**Product configuration: MU05**

MU05: Large body spotlight - warm white - electronic ballast - flood optic

**Product code**MU05: Large body spotlight - warm white - electronic ballast - flood optic **Attention! Code no longer in production****Technical description**

Adjustable spotlight with adapter for installation on mains electrified track for high output LED lamp with monochrome emission in a warm white (3000K) colour. Electronic ballast. The luminaire is made of die-cast aluminium and thermoplastic material, and allows 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. The luminaire has mechanical aiming locks and graduated scales for both movements, operated using the same tool on two screws, one on the optic compartment and one on the adapter for the track. Spotlight equipped with accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

**Installation**

On an electrified track

**Colour**

White (01) | Grey / Black (74)


**Mounting**

three circuit track

**Wiring**

The electronic components are housed in the luminaire.

Complies with EN60598-1 and pertinent regulations


**Technical data**

lm system:	3382	CRI (minimum):	90
W system:	37.5	Colour temperature [K]:	3000
lm source:	4400	MacAdam Step:	2
W source:	33	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	90.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	77	Number of optical assemblies:	1
Beam angle [°]:	32°		

**Polar**

Imax=11876 cd		Lux			
90°	180°	h	d	Em	Emax
		2	1.1	2454	2969
		4	2.3	613	742
		6	3.4	273	330
		8	4.6	153	186
α = 32°					

### Isolux

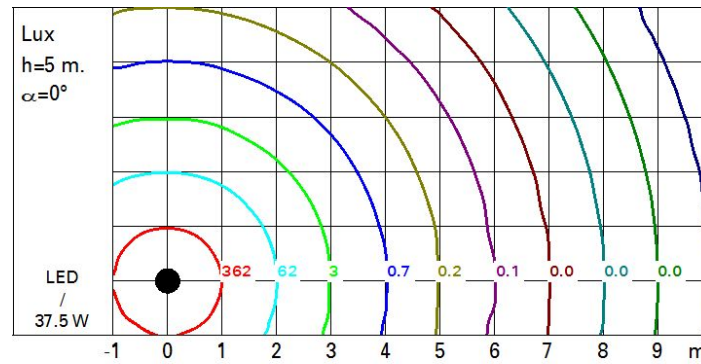

### UGR diagram

Corrected UGR values (at 4400 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	1.4	1.9	1.6	2.1	2.3	1.4	1.9	1.6	2.1	2.3
	3H	1.4	1.8	1.7	2.1	2.4	1.3	1.8	1.6	2.0	2.3
	4H	1.4	1.8	1.7	2.1	2.4	1.3	1.7	1.6	2.0	2.3
	6H	1.4	1.8	1.7	2.1	2.4	1.2	1.6	1.6	1.9	2.2
	8H	1.4	1.7	1.7	2.1	2.4	1.2	1.6	1.6	1.9	2.2
	12H	1.3	1.7	1.7	2.0	2.4	1.2	1.5	1.5	1.8	2.2
4H	2H	1.3	1.7	1.6	2.0	2.3	1.4	1.8	1.7	2.1	2.4
	3H	1.4	1.7	1.7	2.1	2.4	1.4	1.8	1.8	2.1	2.5
	4H	1.4	1.7	1.8	2.1	2.5	1.4	1.7	1.8	2.1	2.5
	6H	1.4	1.7	1.8	2.1	2.5	1.4	1.6	1.8	2.0	2.5
	8H	1.4	1.7	1.8	2.1	2.5	1.3	1.6	1.8	2.0	2.4
	12H	1.4	1.6	1.8	2.0	2.5	1.3	1.5	1.8	2.0	2.4
8H	4H	1.3	1.6	1.8	2.0	2.4	1.4	1.7	1.8	2.1	2.5
	6H	1.4	1.6	1.8	2.0	2.5	1.4	1.6	1.9	2.0	2.5
	8H	1.4	1.5	1.8	2.0	2.5	1.4	1.5	1.8	2.0	2.5
	12H	1.3	1.5	1.8	1.9	2.5	1.3	1.5	1.8	2.0	2.5
12H	4H	1.3	1.5	1.8	2.0	2.4	1.4	1.6	1.8	2.0	2.5
	6H	1.3	1.5	1.8	2.0	2.5	1.3	1.5	1.8	2.0	2.5
	8H	1.3	1.5	1.8	2.0	2.5	1.3	1.5	1.8	1.9	2.5
Variations with the observer position at spacing:											
S =		1.0H	3.6 / -3.7				3.6 / -3.7				
		1.5H	6.0 / -4.8				6.0 / -4.8				
		2.0H	8.0 / -5.4				8.0 / -5.4				