

Action


Design Jean Michel Wilmotte

iGuzzini

Last information update: October 2020

Product configuration: 6682+L092

6682: Individual pendant Dark-VDU $L \leq 1000 \text{ cd/m}^2$ $\alpha > 65^\circ$ up/down with electronic control gear DALI - automatic dimming T162x28/54W



Product code

6682: Individual pendant Dark-VDU $L \leq 1000 \text{ cd/m}^2$ $\alpha > 65^\circ$ up/down with electronic control gear DALI - automatic dimming T162x28/54W **Attention! Code no longer in production**

Technical description

Suspended lighting system designed for fluorescent light sources with up/down light emission. The product permits downlight-only emission by means of a top cover (to be ordered separately) made of plastic material. The product is equipped with motion/lux sensor for automatic dimming according to light levels in the room. The specular optics can be removed without tools for ordinary maintenance operations. The product has a controlled-luminance optic for 65° suitable to be used in environments with VDUs according to Standard EN 12464-1. The lamellar optic with bi-parabolic profile and its external surface are made of anodised specular superpure aluminium and are equipped with fall-prevention system. The structure of the fitting is made of painted extruded aluminium; the lamp-holding supports are made of galvanised painted sheet steel; the end caps (supplied with the product) are of polycarbonate. The top protection screen (to be ordered separately) is made of transparent polycarbonate subjected to anti-UV treatment. The power-supply cable is transparent and the cables are subjected to antioxidant treatment. Suspended installation. The suspension system (supplied with the product) has sheet-steel supporting plates with polycarbonate covering bases and steel suspension cables with millimetric adjustment system (applied to the modules).

Installation

Pendant

Colour

Grey (15)

Weight (Kg)

4.89

Mounting

ceiling pendant

Wiring

The product is equipped with DALI dimmable electronic ballast with motion and lux sensor. It takes up 1 DALI address.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	6192	Colour temperature [K]:	6500
W system:	124	Ballast losses [W]:	16
Im source:	4050	Voltage [Vin]:	230
W source:	54	Lamp code:	L092
Luminous efficiency (Im/W, real value):	49.9	Socket:	G5
Im in emergency mode:	-	Number of lamps for optical assembly:	2
Total light flux at or above an angle of 90° [Lm]:	3086	ZVEI Code:	T 16
Light Output Ratio (L.O.R.) [%]:	76	Number of optical assemblies:	1
CRI:	86	Control:	DALI


Polar

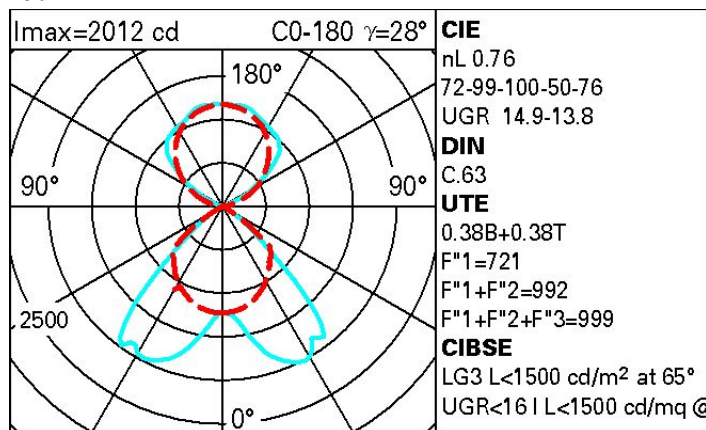

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	46	40	36	33	36	32	29	22	58
1.0	51	45	41	38	40	37	33	25	65
1.5	57	52	49	46	46	43	38	29	77
2.0	60	57	54	51	50	47	41	32	83
2.5	62	59	57	55	52	50	44	33	87
3.0	63	61	59	57	53	52	45	34	90
4.0	65	63	61	60	55	54	46	35	92
5.0	66	64	63	61	56	55	47	36	93

Luminance curve limit

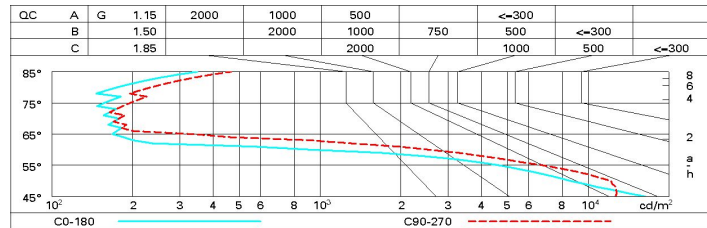

UGR diagram

Corrected UGR values (at 8'100 lm bare lamp luminous flux)											
Reflect.:	ceiltav	viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
X	Y										
2H	2H	15.8	16.3	16.7	17.2	18.3	14.8	15.3	15.7	16.1	17.2
	3H	15.6	16.0	16.5	16.9	18.0	14.6	15.0	15.5	15.9	17.1
	4H	15.4	15.8	16.4	16.8	17.9	14.5	14.9	15.4	15.8	16.9
	6H	15.3	15.7	16.3	16.6	17.8	14.3	14.7	15.3	15.6	16.8
	8H	15.2	15.6	16.2	16.5	17.7	14.3	14.6	15.2	15.6	16.8
	12H	15.2	15.5	16.1	16.5	17.7	14.2	14.5	15.2	15.5	16.7
4H	2H	15.5	15.9	16.4	16.8	18.0	14.4	14.8	15.3	15.7	16.9
	3H	15.2	15.6	16.2	16.5	17.7	14.2	14.5	15.2	15.5	16.7
	4H	15.1	15.4	16.1	16.3	17.6	14.1	14.3	15.0	15.3	16.6
	6H	15.0	15.2	16.0	16.2	17.5	13.9	14.2	14.9	15.2	16.4
	8H	14.9	15.1	15.9	16.1	17.4	13.8	14.1	14.9	15.1	16.4
	12H	14.8	15.0	15.8	16.0	17.3	13.8	14.0	14.8	15.0	16.3
8H	4H	14.9	15.1	15.9	16.1	17.4	13.9	14.1	14.9	15.1	16.4
	6H	14.7	14.9	15.8	15.9	17.3	13.7	13.9	14.7	14.9	16.2
	8H	14.7	14.8	15.7	15.8	17.2	13.6	13.8	14.7	14.8	16.1
	12H	14.6	14.7	15.6	15.8	17.1	13.6	13.7	14.6	14.7	16.1
12H	4H	14.8	15.0	15.8	16.0	17.3	13.8	14.0	14.8	15.0	16.3
	6H	14.7	14.8	15.7	15.8	17.2	13.6	13.8	14.7	14.8	16.1
	8H	14.6	14.7	15.6	15.8	17.1	13.6	13.7	14.6	14.7	16.1
Variations with the observer position at spacing:											
S =		2.6 / -5.3					1.4 / -3.1				
		5.1 / -20.2					2.7 / -15.8				
		7.1 / -20.9					4.7 / -17.9				