


Design iGuzzini

Last information update: February 2025

QU23: Ø 172 mm - warm white - dali



QU23: Ø 172 mm - warm white - dali

A round luminaire that can be surface or pendant-mounted using a kit to be ordered separately. The product is designed to use LED lamps with C.o.B. technology. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. The product is fitted with a passive dissipation system. Luminaire complete with LED lamp in warm white colour tone (3000K). General lighting beam.

surface or pendant-mounted using a kit to be ordered as an accessory.

White / Aluminium (39) | Black / Aluminium (40)

1.03

ceiling surface

product complete with dali components

Complies with EN60598-1 and pertinent regulations




Im system:	1890	Colour temperature [K]:	3000
W system:	17	MacAdam Step:	2
Im source:	2100	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	15	Lamp code:	LED
Luminous efficiency (lm/W, real value):	111.2	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	90	Control:	DALI-2
CRI (minimum):	90		

<p>$\alpha_{\text{max}} = 1271 \text{ cd}$</p> <p>$\alpha = 77^\circ / 78^\circ$</p>	CIE nL 0.90 85-100-100-100-90 UGR 19.8-19.9 DIN A.61 UTE 0.90A+0.00T $F^*1 = 846$ $F^*1 + F^*2 = 996$ $F^*1 + F^*2 + F^*3 = 1000$		Lux			
	CIBSE LG3 L<1500 cd/m² at 65°		h	d	Em	E _{max}
			1	1.6	933	1259
			2	3.2	233	315
			3	4.8	104	140
		4	6.4	58	79	

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	69	65	62	68	64	64	60	67
1.0	80	74	71	68	73	70	70	66	73
1.5	86	82	79	76	81	78	77	74	82
2.0	89	86	84	82	85	83	82	79	88
2.5	91	89	87	86	88	86	85	82	91
3.0	93	91	89	88	89	88	87	84	93
4.0	94	92	91	90	91	90	89	86	95
5.0	95	94	92	92	92	91	90	87	97

Luminance curve limit

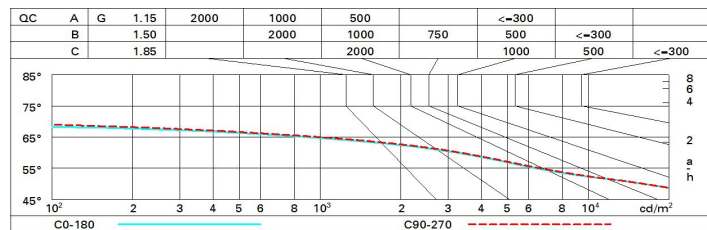

UGR diagram

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	20.4	21.1	20.6	21.4	21.6	20.4	21.2	20.7	21.5	21.7
	3H	20.2	20.9	20.5	21.2	21.5	20.3	21.0	20.7	21.3	21.6
	4H	20.1	20.8	20.5	21.1	21.4	20.3	20.9	20.6	21.2	21.5
	6H	20.1	20.6	20.4	21.0	21.3	20.2	20.8	20.5	21.1	21.4
	8H	20.0	20.6	20.4	20.9	21.3	20.1	20.7	20.5	21.0	21.4
	12H	20.0	20.5	20.4	20.9	21.2	20.1	20.6	20.5	21.0	21.3
4H	2H	20.2	20.8	20.5	21.1	21.4	20.2	20.9	20.6	21.2	21.5
	3H	20.0	20.5	20.4	20.9	21.2	20.1	20.6	20.5	21.0	21.3
	4H	19.9	20.4	20.3	20.8	21.1	20.0	20.5	20.4	20.8	21.2
	6H	19.8	20.2	20.3	20.6	21.1	19.9	20.3	20.4	20.7	21.2
	8H	19.8	20.2	20.2	20.6	21.0	19.9	20.3	20.3	20.7	21.1
	12H	19.7	20.1	20.2	20.5	21.0	19.8	20.2	20.3	20.6	21.1
8H	4H	19.8	20.2	20.2	20.6	21.0	19.9	20.3	20.3	20.7	21.1
	6H	19.7	20.0	20.2	20.5	20.9	19.8	20.1	20.3	20.5	21.0
	8H	19.6	19.9	20.1	20.4	20.9	19.7	20.0	20.2	20.5	21.0
	12H	19.6	19.8	20.1	20.3	20.8	19.7	19.9	20.2	20.4	20.9
12H	4H	19.7	20.1	20.2	20.5	21.0	19.8	20.2	20.3	20.6	21.1
	6H	19.6	19.9	20.1	20.4	20.9	19.7	20.0	20.2	20.5	21.0
	8H	19.6	19.8	20.1	20.3	20.8	19.7	19.9	20.2	20.4	20.9
Variations with the observer position at spacing:											
S =		2.6 / -8.8					2.5 / -8.2				
		5.1 / -16.0					5.0 / -14.9				
		7.1 / -33.7					7.0 / -28.7				