


Last information update: June 2023

**Product configuration: MJ29**

MJ29: complete pendant luminaire L 1387 - Low Contrast - neutral white LED - up / down lighting - integrated electronic control gear - general light optic

**Product code**MJ29: complete pendant luminaire L 1387 - Low Contrast - neutral white LED - up / down lighting - integrated electronic control gear - general light optic **Attention! Code no longer in production****Technical description**

Pendant luminaire with LED lamps for general light (Low Contrast): down light emission (approx. 80%) - up light emission (approx. 20%). Very thin aluminium profile, complete with end caps made of thermoplastic material. Kit complete with suspension cables and power cable; ceiling base attachment made of thermoplastic material with sheet steel anchor plate. PMMA diffuser screen for down light emission; frosted polycarbonate upper screens. A control system, integrated with the electronic control gear, stabilises current and voltage values, guaranteeing correct LED lamp operation and longer life, also making the light flow emitted very even. Neutral white LED.

**Installation**

pendant; steel suspension cables; suspension supports with rapid adjustment system are positioned at the ends of the profile; base for power cable (max. L 1500 mm) with anchor plate; all ceiling attachments use screws and screw anchors (not supplied).

**Colour**

White (01) | Grey (15)

**Weight (Kg)**

4.42

**Mounting**

ceiling pendant

**Wiring**

connected to the mains using a standard 5-pin terminal block on the power base. Product complete with electronic control gear, equipped with current stabiliser, integrated in the module. Down light / up light switch on separation: not available.


Complies with EN60598-1 and pertinent regulations



IP20

**Technical data**


lm system:	3905	Colour temperature [K]:	4000
W system:	46.4	MacAdam Step:	3
lm source:	7100	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	39.4	Ballast losses [W]:	7
Luminous efficiency (lm/W, real value):	84.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	587	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	55	Number of optical assemblies:	1
CRI (minimum):	80		

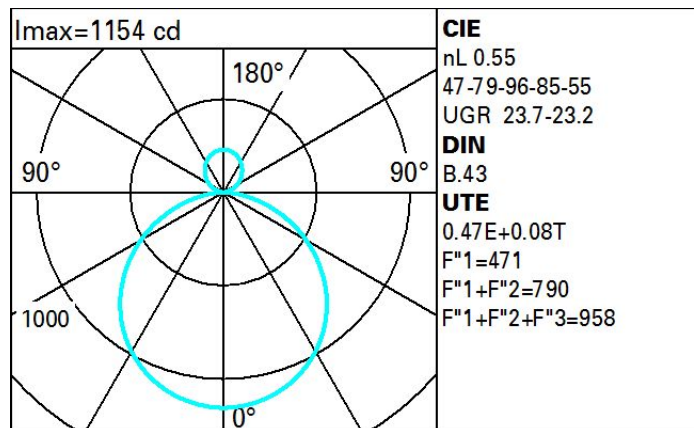**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	34	29	25	22	27	23	22	18	39
1.0	38	32	29	26	31	27	26	22	46
1.5	43	39	36	33	37	34	32	28	59
2.0	46	43	40	38	41	38	36	32	68
2.5	48	45	43	41	43	41	39	35	74
3.0	50	47	45	43	45	43	41	36	78
4.0	52	49	48	46	47	45	43	39	83
5.0	53	51	49	48	48	47	45	40	86

# Luminance curve limit

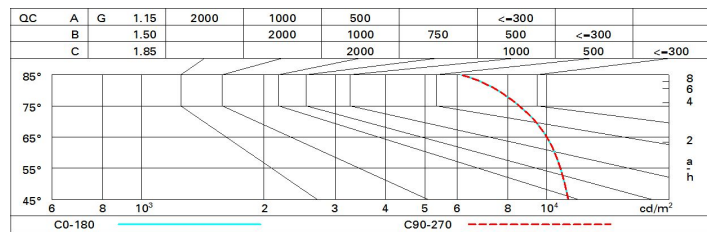

# UGR diagram

Corrected UGR values (at 7100 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	20.0	21.0	20.6	21.5	22.1	20.0	21.0	20.6	21.5	22.1
	3H	21.5	22.4	22.1	23.0	23.6	20.5	21.4	21.1	21.9	22.5
	4H	22.1	22.9	22.7	23.5	24.1	20.7	21.5	21.2	22.0	22.7
	6H	22.5	23.3	23.1	23.8	24.5	20.7	21.5	21.3	22.0	22.7
	8H	22.6	23.4	23.2	23.9	24.6	20.7	21.4	21.3	22.0	22.7
	12H	22.7	23.4	23.3	24.0	24.7	20.7	21.4	21.3	22.0	22.6
4H	2H	20.7	21.5	21.2	22.0	22.7	22.1	22.9	22.7	23.5	24.1
	3H	22.3	23.0	22.9	23.6	24.3	22.7	23.4	23.3	24.0	24.7
	4H	23.0	23.6	23.6	24.2	24.9	23.0	23.6	23.6	24.2	24.9
	6H	23.5	24.1	24.2	24.7	25.4	23.2	23.7	23.8	24.4	25.1
	8H	23.7	24.2	24.4	24.8	25.6	23.2	23.7	23.9	24.4	25.1
	12H	23.8	24.2	24.5	24.9	25.7	23.2	23.7	23.9	24.3	25.1
8H	4H	23.2	23.7	23.9	24.4	25.1	23.7	24.2	24.4	24.8	25.6
	6H	23.9	24.3	24.6	25.0	25.8	24.0	24.4	24.7	25.1	25.9
	8H	24.1	24.5	24.8	25.2	26.0	24.1	24.5	24.8	25.2	26.0
	12H	24.3	24.6	25.0	25.3	26.1	24.2	24.5	24.9	25.2	26.0
12H	4H	23.2	23.7	23.9	24.3	25.1	23.8	24.2	24.5	24.9	25.7
	6H	23.9	24.3	24.6	25.0	25.8	24.1	24.5	24.8	25.2	26.0
	8H	24.2	24.5	24.9	25.2	26.0	24.3	24.6	25.0	25.3	26.1
Variations with the observer position at spacing:											
S =		1.0H					0.1 / -0.1				
		1.5H					0.3 / -0.4				
		2.0H					0.4 / -0.6				