

Action



Design Jean Michel Wilmotte

iGuzzini

Last information update: October 2020

Product configuration: 6609+L199

6609: General lighting module up/down with electronic control gear T162x35/49W



Product code

6609: General lighting module up/down with electronic control gear T162x35/49W **Attention! Code no longer in production**

Technical description

Suspended, surface-mounted or recessed lighting system designed for fluorescent light sources with up/down light emission. The product permits downlight-only emission by means of a top cover (to be ordered separately) made of plastic material. The modules are complete with terminal boards and cables for through wiring. Ready for switch-on of 3 groups of fittings. The product produces general light and has an extruded polycarbonate screen with diffusing opal surface subjected to anti-UV treatment. The diffuser screens can be removed without tools for ordinary maintenance operations. The structure of the fitting is made of painted extruded aluminium; the lamp-holding supports are made of galvanised painted sheet steel; and the end caps (to be ordered separately) of polycarbonate. The top protection screen (to be ordered separately) is made of transparent polycarbonate subjected to anti-UV treatment. The power-supply cable is transparent and the cables are subjected to antioxidant treatment. The modules can be combined by means of direct and corner 90° couplings as well as structural modules (to be ordered separately). The suspension system (to be ordered separately) has sheet-steel supporting plates with polycarbonate covering bases and steel suspension cables with a millimetric adjustment system (applied to the modules). Ceiling application by means of an aluminium structure (to be ordered separately). Recessed and semi-recessed installation system by means of a structure designed for application to false ceilings 12.5mm and 15mm thick, with concealed rim (to be ordered separately).

Installation

Suspended, surface-mounted, semi-recessed or recessed installation.

Colour

White (01) | Grey (15)

Weight (Kg)

4.84

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

The product is equipped with multiwatt 2x35/49W T16 electronic ballast. It is designed for through wiring by means of special terminal boards housed inside the aluminium profile. The system is able to switch on three groups of fittings separately.

Complies with EN60598-1 and pertinent regulations



850°C

IP20




Technical data

lm system:	7024
W system:	112
lm source:	4300
W source:	49
Luminous efficiency (lm/W, real value):	62.7
lm in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	3110
Light Output Ratio (L.O.R.) [%]:	82
CRI:	85

Colour temperature [K]:	6500
Ballast losses [W]:	14
Voltage [Vin]:	230
Lamp code:	L199
Socket:	G5
Number of lamps for optical assembly:	2
ZVEI Code:	T 16
Number of optical assemblies:	1

Polar

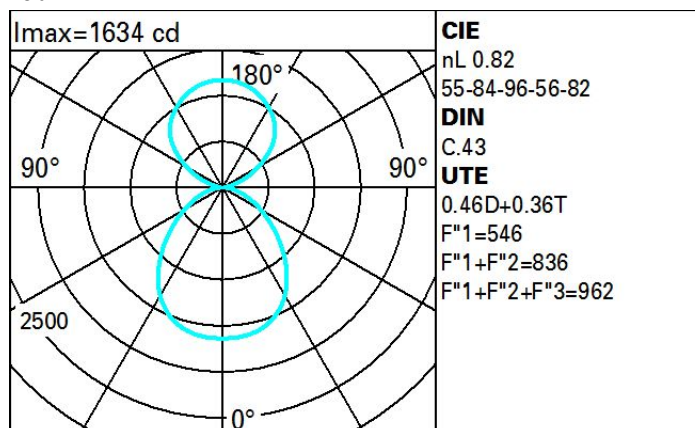

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	47	40	35	31	35	31	28	20	45
1.0	52	45	40	36	40	36	32	24	52
1.5	59	53	49	45	47	44	38	29	64
2.0	63	59	55	52	52	49	43	33	72
2.5	66	62	59	56	54	52	46	35	77
3.0	67	64	61	59	56	54	48	37	81
4.0	70	67	65	62	59	57	50	39	85
5.0	71	69	67	65	60	59	51	40	88

Luminance curve limit

