




EH61: Pole-mounted system - ST1 optic - Warm White - MidNight - ø 46-60-76mm



lm system:	4310	MacAdam Step:	3
W system:	33.7	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
lm source:	-	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W source:	-	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	127.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	100	Number of optical assemblies:	1
CRI (minimum):	70	Intervallo temperatura ambiente:	from -40°C to 50°C.
Colour temperature [K]:	3000	Control:	Middle of the night

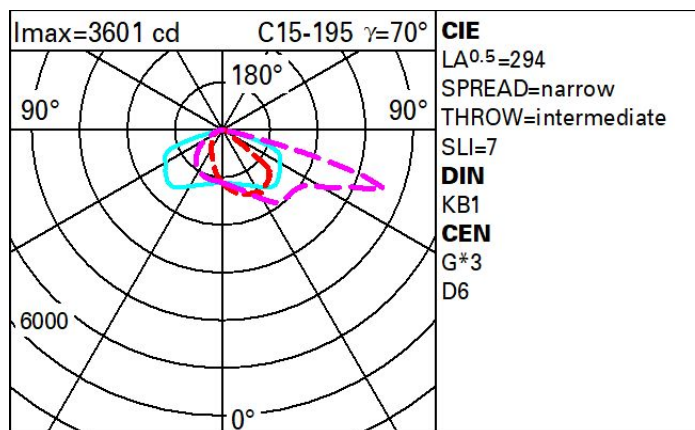

Isolux

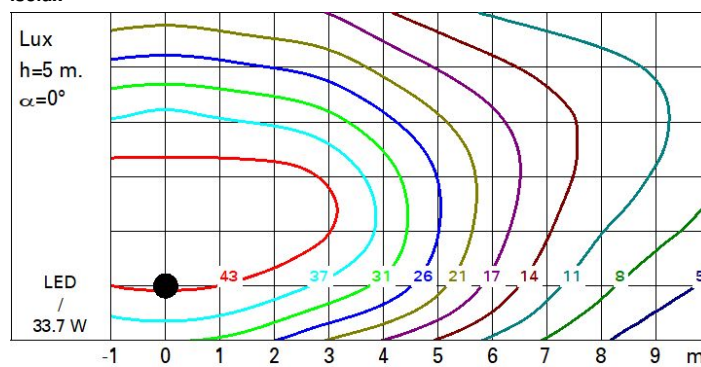

Utilisation factors

