

## Laser Blade InOut

Design iGuzzini

iGuzzini

Last information update: October 2024

### Product configuration: E881

E881: Ceiling-mounted Laser Blade InOut, Neutral White LED, Flood optic



### Product code


E881: Ceiling-mounted Laser Blade InOut, Neutral White LED, Flood optic

### Technical description

Dual optic element, outdoor rectangular, ceiling-mounted luminaire with Neutral White LED lamps and a fixed Flood optic. Consists of an optical assembly (rectangular), an upper base, a glass cover, and a ceiling plate. The optical assembly and upper base are made of aluminium alloy and are subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. AISI 304 stainless steel ceiling fixing plate. The tempered sodium-calcium sealing glass is transparent, with black serigraphy on the edge, 3mm thick and joined to the optical assembly with silicone. There are silicone seals between the upper base and the optical assembly too. Metallised, thermoplastic, high definition optic, integrated in a rear position in the black, anti-glare screen. Single cable entrance via black polyamide PG11 cable clamp, suitable for  $\varnothing 6.5 \pm 1.1$  mm cables. Connection with three fast-coupling terminals. Possibility to use unipolar cables with  $2.4 \pm 3.4$  mm diameter (  $1-2.5$  mm<sup>2</sup> ) All external screws used are made of A2 stainless steel.

### Installation

For ceiling-mounting using the special stainless steel plate. Secure using screw anchors for concrete, cement and solid brick.



### Colour

Black / Black (43) | Black / White (47) | Grey / Black (74) | Rust  
Brown / Black (I5) | Black/Glossy Urban Bronze (S7) |  
Black/Glossy Copper (S8) | Black/Glossy Sand (S9) |  
Black/Glossy Lead (T0) | White/Glossy Urban Bronze (T1) |  
White/Glossy Copper (T2) | White/Glossy Sand (T3) |  
White/Glossy Lead (T4) | Grey/Glossy Urban Bronze (T5) |  
Grey/Glossy Copper (T6) | Grey/Glossy Sand (T7) | Grey/Glossy  
Lead (T8) | Rust Brown/Glossy Urban Bronze (T9) | Rust  
Brown/Glossy Copper (U0) | Rust Brown/Glossy Sand (U1) | Rust  
Brown/Glossy Lead (U2)

### Weight (Kg)

0.75

### Mounting

ceiling surface

### Wiring

Complete with built-in electronic ballast (220÷240V ac 50/60Hz).


Complies with EN60598-1 and pertinent regulations




### Technical data

lm system:	292	Colour temperature [K]:	4000
W system:	5.7	MacAdam Step:	3
lm source:	400	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W source:	4.2	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
Luminous efficiency (lm/W, real value):	51.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	73	Number of optical assemblies:	1
Beam angle [°]:	30°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	95	Power factor:	See installation instructions
CRI (typical):	97	Overvoltage protection:	2kV Common mode & 1kV Differential mode

**Polar**

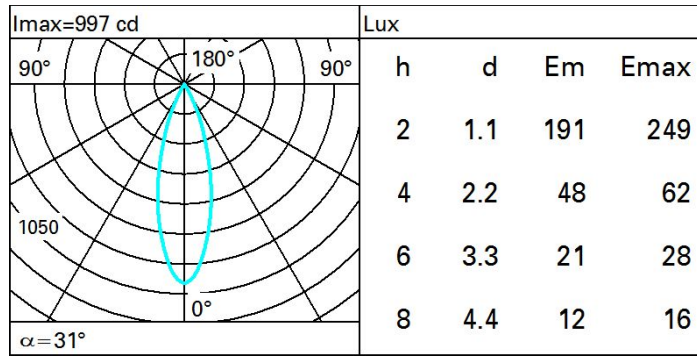

**Isolux**

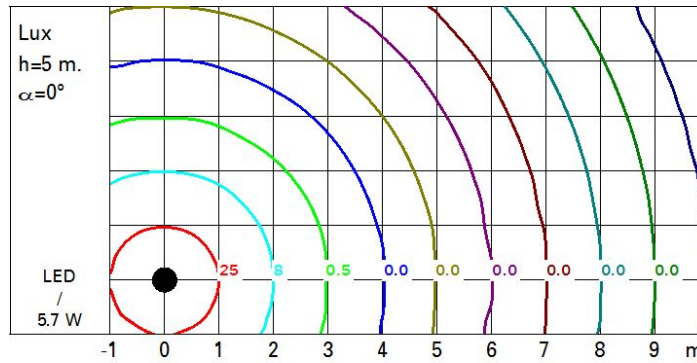

**UGR diagram**

Corrected UGR values (at 400 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-2.8	-2.3	-2.5	-2.0	-1.8	-2.8	-2.3	-2.5	-2.0	-1.8
	3H	-2.8	-2.3	-2.5	-2.1	-1.8	-2.9	-2.4	-2.6	-2.1	-1.9
	4H	-2.8	-2.4	-2.5	-2.1	-1.8	-2.9	-2.5	-2.6	-2.2	-1.9
	6H	-2.8	-2.4	-2.5	-2.1	-1.8	-3.0	-2.6	-2.6	-2.3	-2.0
	8H	-2.8	-2.4	-2.4	-2.1	-1.7	-3.0	-2.6	-2.7	-2.3	-2.0
	12H	-2.8	-2.4	-2.4	-2.1	-1.7	-3.1	-2.7	-2.7	-2.4	-2.0
4H	2H	-2.9	-2.5	-2.6	-2.2	-1.9	-2.8	-2.4	-2.5	-2.1	-1.8
	3H	-2.9	-2.5	-2.5	-2.2	-1.8	-2.8	-2.5	-2.5	-2.1	-1.8
	4H	-2.9	-2.5	-2.5	-2.2	-1.8	-2.9	-2.5	-2.5	-2.2	-1.8
	6H	-2.8	-2.5	-2.4	-2.1	-1.7	-2.9	-2.6	-2.5	-2.2	-1.8
	8H	-2.8	-2.5	-2.4	-2.1	-1.7	-2.9	-2.7	-2.5	-2.3	-1.8
	12H	-2.8	-2.5	-2.3	-2.1	-1.6	-3.0	-2.7	-2.5	-2.3	-1.9
8H	4H	-2.9	-2.7	-2.5	-2.3	-1.8	-2.8	-2.5	-2.4	-2.1	-1.7
	6H	-2.8	-2.6	-2.4	-2.2	-1.7	-2.8	-2.6	-2.3	-2.1	-1.6
	8H	-2.8	-2.6	-2.3	-2.1	-1.6	-2.8	-2.6	-2.3	-2.1	-1.6
	12H	-2.7	-2.5	-2.2	-2.0	-1.5	-2.8	-2.6	-2.3	-2.1	-1.6
12H	4H	-3.0	-2.7	-2.5	-2.3	-1.9	-2.8	-2.5	-2.3	-2.1	-1.6
	6H	-2.9	-2.7	-2.4	-2.2	-1.7	-2.7	-2.5	-2.2	-2.1	-1.6
	8H	-2.8	-2.6	-2.3	-2.1	-1.6	-2.7	-2.5	-2.2	-2.0	-1.5
Variations with the observer position at spacing:											
S =	1.0H	5.4 / -4.0					5.4 / -4.0				
	1.5H	8.1 / -4.5					8.1 / -4.5				
	2.0H	10.0 / -4.7					10.0 / -4.7				