

Laser Blade XS

iGuzzini



iGuzzini

Last information update: June 2025

Product configuration: Q949
Q949: Frame recessed luminaire - 5 cells - General Lighting Pro - DALI

Q949: Frame recessed luminaire - 5 cells - General Lighting Pro - DALI

Q949: Frame recessed luminaire - 5 cells - General Lighting Pro - DALI

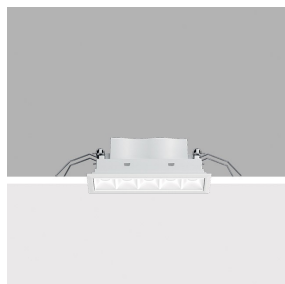

Q949: Frame recessed luminaire - 5 cells - General Lighting Pro - DALI

Q949: Frame recessed luminaire - 5 cells - General Lighting Pro - DALI

Rectangular recessed miniaturised luminaire with 5 optical elements for LED sources - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Despite the ultracompact size of the product, the combination of a total white finish and the patented technology of the optic system guarantees an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic power supply connected to the luminaire.

Rectangular recessed miniaturised luminaire with 5 optical elements for LED sources - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Despite the ultracompact size of the product, the combination of a total white finish and the patented technology of the optic system guarantees an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic power supply connected to the luminaire.

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 96.

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 96.

Weight (Kg)
0.35


wall recessed ceiling recessed

wall recessed ceiling recessed

On power supply; quick-coupling connection

On power supply; quick-coupling connection

Complies with EN60598-1 and pertinent regulations

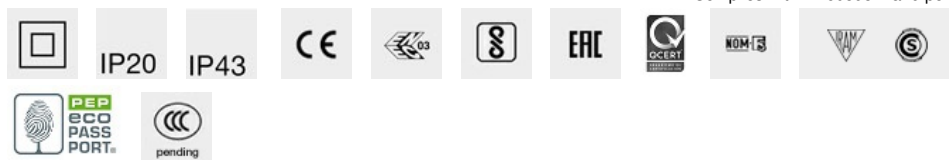

Im system:	614	Colour temperature [K]:	2700
W system:	12.4	MacAdam Step:	2
Im source:	890	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	9.9	Lamp code:	LED
Luminous efficiency (lm/W, real value):	49.5	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	69	Control:	DALI-2
CRI (minimum):	90		


Im system:	614	Colour temperature [K]:	2700
W system:	12.4	MacAdam Step:	2
Im source:	890	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	9.9	Lamp code:	LED
Luminous efficiency (lm/W, real value):	49.5	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	69	Control:	DALI-2
CRI (minimum):	90		

The figure shows a light distribution diagram for the 'LUX' luminaire. The diagram is a circular plot with concentric circles representing beam diameters of 750, 1000, and 1250 mm. Radial lines indicate beam angles of 90°, 180°, and 90°. A red teardrop-shaped curve represents the light distribution, with a maximum beam angle of $\alpha = 54^\circ$. The diagram is labeled with 'LUX' and 'LUX'.

LUX		LUX	
h	d	Em	E _{max}
1	1	547	738
2	2	137	184
3	3.1	61	82
4	4.1	34	46

Technical specifications for the luminaire:


- Imax=738 cd
- CIE nL 0.69
- 88-98-100-100-69
- UGR 21.8-21.7
- DIN A.61
- UTE 0.69A+0.00T
- F*1=877
- F*1+F*2=981
- F*1+F*2+F*3=997
- $\alpha = 54^\circ$

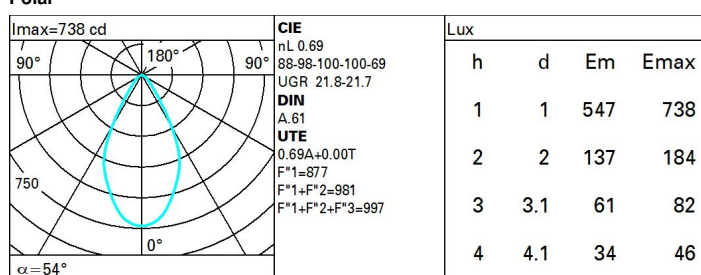

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	54	51	49	54	51	51	48	69
1.0	62	58	55	53	57	55	54	52	75
1.5	66	63	61	59	62	60	60	57	83
2.0	69	66	65	63	65	64	63	61	88
2.5	70	68	67	66	67	66	65	63	92
3.0	71	70	69	68	69	68	67	65	94
4.0	72	71	70	70	70	69	68	66	96
5.0	73	72	71	71	71	70	69	67	97

Luminance curve limit

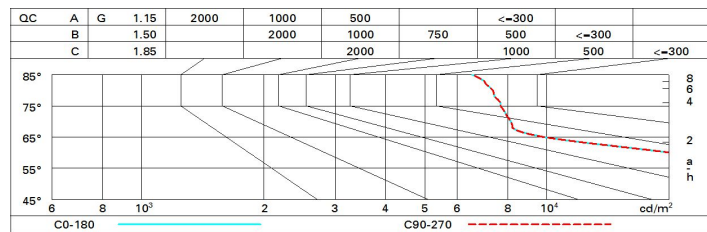

UGR diagram

Corrected UGR values (at 890 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	21.9	22.5	22.1	22.7	23.0	21.9	22.5	22.1	22.7	23.0
	3H	21.8	22.4	22.2	22.7	23.0	21.9	22.4	22.2	22.7	23.0
	4H	21.8	22.4	22.2	22.6	23.0	21.8	22.4	22.2	22.6	22.9
	6H	21.8	22.3	22.2	22.6	22.9	21.7	22.2	22.1	22.6	22.9
	8H	21.8	22.3	22.2	22.6	22.9	21.7	22.2	22.1	22.5	22.9
	12H	21.8	22.2	22.1	22.6	22.9	21.7	22.1	22.1	22.5	22.8
4H	2H	21.8	22.4	22.2	22.6	22.9	21.8	22.4	22.2	22.6	23.0
	3H	21.8	22.3	22.2	22.6	23.0	21.9	22.3	22.2	22.7	23.0
	4H	21.8	22.2	22.2	22.6	23.0	21.8	22.2	22.2	22.6	23.0
	6H	21.8	22.2	22.3	22.6	23.0	21.8	22.1	22.2	22.5	22.9
	8H	21.8	22.1	22.3	22.6	23.0	21.7	22.1	22.2	22.5	22.9
	12H	21.8	22.1	22.3	22.5	23.0	21.7	22.0	22.2	22.4	22.9
8H	4H	21.7	22.1	22.2	22.5	22.9	21.8	22.1	22.3	22.6	23.0
	6H	21.8	22.0	22.3	22.5	23.0	21.8	22.1	22.3	22.5	23.0
	8H	21.8	22.0	22.3	22.5	23.0	21.8	22.0	22.3	22.5	23.0
	12H	21.8	22.0	22.3	22.5	23.0	21.8	22.0	22.3	22.5	23.0
12H	4H	21.7	22.0	22.2	22.4	22.9	21.8	22.1	22.3	22.5	23.0
	6H	21.7	22.0	22.2	22.4	22.9	21.8	22.0	22.3	22.5	23.0
	8H	21.8	22.0	22.3	22.5	23.0	21.8	22.0	22.3	22.5	23.0
Variations with the observer position at spacing:											
S =		1.0H					2.4 / -2.2				
		1.5H					4.5 / -4.7				
		2.0H					6.3 / -6.0				