

Laser Blade



Design iGuzzini

iGuzzini

Last information update: July 2025

Product configuration: Q939

Q939: Frame recessed luminaire - 10 cells - General Lighting Pro - DALI



Product code

Q939: Frame recessed luminaire - 10 cells - General Lighting Pro - DALI

Technical description

Rectangular recessed luminaire with 10 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. The total white finish and the patented technology of the optic system guarantee an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic control gear connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 274.

Colour
White (01)

Weight (Kg)
0.6


Mounting

mounting
wall recessed/ceiling recessed

Wiring

On control gear box with quick-coupling connections.


Complies with EN60598-1 and pertinent regulations

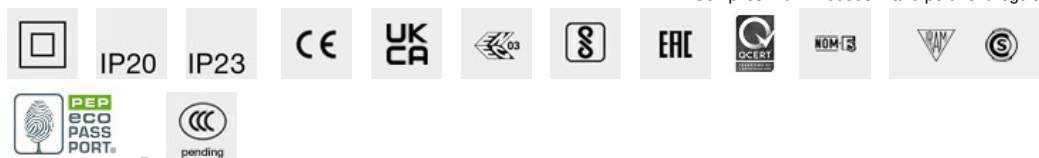

Technical data

Im system:	1650	CRI (typical):	92
W system:	23.4	Colour temperature [K]:	3000
Im source:	2200	MacAdam Step:	3
W source:	20	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	70.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	75	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2


Polar

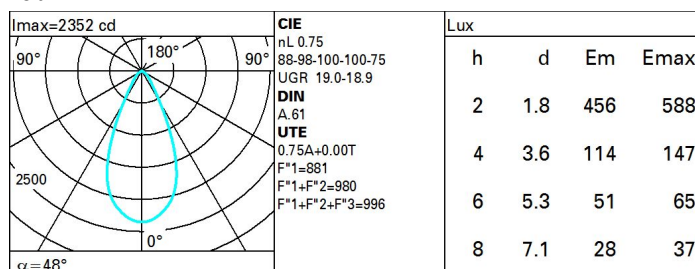

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	64	59	56	54	58	56	55	52	70
1.0	67	63	60	58	62	60	59	56	75
1.5	72	69	66	64	68	66	65	62	83
2.0	75	72	70	69	71	70	69	66	88
2.5	76	74	73	72	73	72	71	69	92
3.0	77	76	75	74	75	74	73	71	94
4.0	79	77	77	76	76	75	74	72	96
5.0	79	78	78	77	77	76	75	73	97

Luminance curve limit

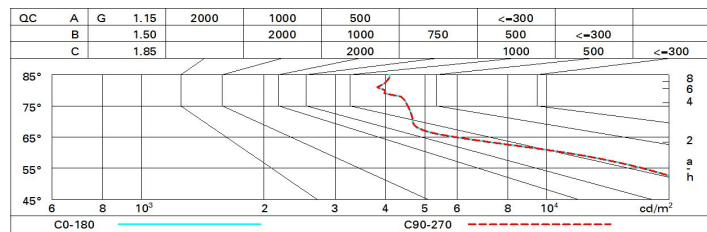

UGR diagram

Corrected UGR values (at 2200 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	18.9	19.6	19.2	19.8	20.0	18.9	19.6	19.2	19.8	20.0
	3H	18.9	19.5	19.2	19.8	20.1	18.9	19.5	19.2	19.8	20.1
	4H	18.9	19.5	19.2	19.8	20.1	18.9	19.5	19.2	19.7	20.0
	6H	18.9	19.4	19.3	19.8	20.1	18.8	19.3	19.2	19.7	20.0
	8H	18.9	19.4	19.3	19.7	20.1	18.8	19.3	19.2	19.6	20.0
	12H	18.9	19.4	19.3	19.7	20.1	18.7	19.2	19.1	19.6	19.9
4H	2H	18.9	19.5	19.2	19.7	20.0	18.9	19.5	19.2	19.8	20.1
	3H	18.9	19.4	19.3	19.8	20.1	19.0	19.5	19.4	19.8	20.2
	4H	19.0	19.4	19.4	19.8	20.2	19.0	19.4	19.4	19.8	20.2
	6H	19.0	19.4	19.5	19.8	20.2	19.0	19.3	19.4	19.7	20.2
	8H	19.0	19.4	19.5	19.8	20.2	18.9	19.3	19.4	19.7	20.1
	12H	19.0	19.3	19.5	19.8	20.2	18.9	19.2	19.4	19.6	20.1
8H	4H	18.9	19.3	19.4	19.7	20.1	19.0	19.4	19.5	19.8	20.2
	6H	19.0	19.3	19.5	19.7	20.2	19.0	19.3	19.5	19.8	20.2
	8H	19.0	19.3	19.5	19.7	20.2	19.0	19.3	19.5	19.7	20.2
	12H	19.1	19.3	19.6	19.8	20.3	19.0	19.2	19.5	19.7	20.2
12H	4H	18.9	19.2	19.4	19.6	20.1	19.0	19.3	19.5	19.8	20.2
	6H	19.0	19.2	19.5	19.7	20.2	19.1	19.3	19.5	19.8	20.3
	8H	19.0	19.2	19.5	19.7	20.2	19.1	19.3	19.6	19.8	20.3
Variations with the observer position at spacing:											
S =	1.0H	1.4 / -1.5					1.4 / -1.5				
	1.5H	3.1 / -3.7					3.1 / -3.7				
	2.0H	4.8 / -4.9					4.8 / -4.9				