

Last information update: April 2024

Product configuration: MB78

MB78: Round recessed luminaire - D=226 mm H=103 mm - neutral white - DALI ballast - general light optic with controlled luminance UGR<19

**Product code**MB78: Round recessed luminaire - D=226 mm H=103 mm - neutral white - DALI ballast - general light optic with controlled luminance UGR<19 **Attention! Code no longer in production****Technical description**

Recessed fixed round luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 2000 lm DALI LED unit in a neutral white tone 4000K and driver separate from the luminaire. Light distribution UGR<19 with controlled luminance.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.72

Mounting

ceiling recessed

Wiring

Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations




IP20

IP23

On the visible part of the product once installed



pending

**Technical data**

lm system:	1839	Colour temperature [K]:	4000
W system:	18.6	MacAdam Step:	3
lm source:	2000	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	16	Lamp code:	LED
Luminous efficiency (lm/W, real value):	98.9	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	92	Control:	DALI
CRI:	80		


Polar

Imax=1588 cd		CIE		Lux			
				h	d	Em	Emax
90°		nL 0.92		1	1.3	1159	1588
		86-100-100-100-92		2	2.6	290	397
		UGR 17.4-17.4		3	3.9	129	176
		DIN		4	5.2	72	99
		A.61					
		UTE					
		0.92A+0.00T					
		F*1=856					
		F*1+F*2=999					
		F*1+F*2+F*3=1000					
		CIBSE					
		LG3 L<1500 cd/m² at 65°					
		UGR<19 L<1500 cd/mq @65°					
α=66°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	77	71	67	64	70	67	66	62	68
1.0	82	77	73	70	75	72	72	68	74
1.5	88	84	81	78	83	80	79	76	82
2.0	91	89	86	84	87	85	84	81	88
2.5	93	91	89	88	90	88	87	84	91
3.0	95	93	92	90	91	90	89	86	94
4.0	96	95	94	93	93	92	91	88	96
5.0	97	96	95	94	94	93	92	89	97

Luminance curve limit

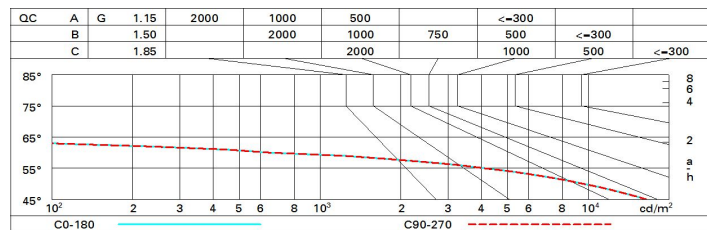

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.9	18.6	18.2	18.9	19.1	17.9	18.6	18.2	18.9	19.1
	3H	17.8	18.4	18.1	18.7	19.0	17.8	18.4	18.1	18.7	19.0
	4H	17.7	18.3	18.0	18.6	18.9	17.7	18.3	18.1	18.6	18.9
	6H	17.6	18.2	18.0	18.5	18.8	17.6	18.2	18.0	18.5	18.8
	8H	17.6	18.1	18.0	18.4	18.8	17.6	18.1	18.0	18.5	18.8
	12H	17.6	18.1	17.9	18.4	18.7	17.6	18.1	18.0	18.4	18.8
4H	2H	17.7	18.3	18.1	18.6	18.9	17.7	18.3	18.0	18.6	18.9
	3H	17.6	18.1	18.0	18.4	18.8	17.6	18.1	18.0	18.4	18.8
	4H	17.5	17.9	17.9	18.3	18.7	17.5	17.9	17.9	18.3	18.7
	6H	17.4	17.8	17.8	18.2	18.6	17.4	17.8	17.8	18.2	18.6
	8H	17.4	17.7	17.8	18.1	18.6	17.4	17.7	17.8	18.1	18.6
	12H	17.3	17.6	17.8	18.1	18.5	17.3	17.6	17.8	18.1	18.5
8H	4H	17.4	17.7	17.8	18.1	18.6	17.4	17.7	17.8	18.1	18.6
	6H	17.3	17.6	17.7	18.0	18.5	17.3	17.6	17.7	18.0	18.5
	8H	17.2	17.5	17.7	17.9	18.4	17.2	17.5	17.7	17.9	18.4
	12H	17.2	17.4	17.7	17.9	18.4	17.2	17.4	17.7	17.9	18.4
12H	4H	17.3	17.6	17.8	18.1	18.5	17.3	17.6	17.8	18.1	18.5
	6H	17.2	17.5	17.7	17.9	18.4	17.2	17.5	17.7	17.9	18.4
	8H	17.2	17.4	17.7	17.9	18.4	17.2	17.4	17.7	17.9	18.4
Variations with the observer position at spacing:											
S =	1.0H	2.2 / -7.0					2.2 / -7.0				
	1.5H	4.6 / -30.0					4.6 / -30.0				
	2.0H	6.6 / -35.0					6.6 / -35.0				