

Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	72	69	67	71	69	68	66	78
1.0	79	76	73	71	75	73	72	70	83
1.5	83	80	78	77	79	78	77	74	89
2.0	86	84	82	81	83	81	80	78	93
2.5	87	86	85	84	85	84	83	80	96
3.0	88	87	86	86	86	85	84	82	98
4.0	89	88	88	87	87	87	85	83	99
5.0	90	89	89	89	88	88	86	84	100

Courbe limite de luminance

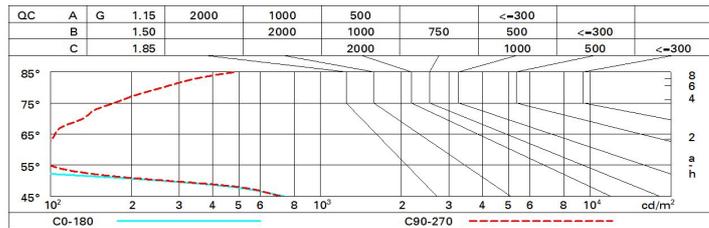


Diagramme UGR

Corrected UGR values (at 4350 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	12.0	13.2	12.9	13.4	13.7	12.4	13.0	12.7	13.2	13.5
	3H	12.5	13.0	12.8	13.3	13.5	12.3	12.8	12.6	13.1	13.3
	4H	12.4	12.9	12.7	13.2	13.5	12.2	12.7	12.5	13.0	13.3
	6H	12.3	12.8	12.7	13.1	13.4	12.1	12.6	12.5	12.9	13.2
	8H	12.3	12.7	12.6	13.0	13.4	12.1	12.5	12.4	12.8	13.2
12H	12.2	12.6	12.6	13.0	13.3	12.0	12.5	12.4	12.8	13.2	
4H	2H	12.4	12.9	12.7	13.2	13.5	12.2	12.7	12.5	13.0	13.3
	3H	12.2	12.6	12.6	13.0	13.3	12.1	12.5	12.4	12.8	13.2
	4H	12.1	12.5	12.5	12.9	13.3	12.0	12.3	12.4	12.7	13.1
	6H	12.1	12.4	12.5	12.8	13.2	11.9	12.2	12.3	12.6	13.0
	8H	12.0	12.3	12.4	12.7	13.1	11.8	12.1	12.3	12.5	13.0
12H	12.0	12.2	12.4	12.7	13.1	11.8	12.0	12.2	12.5	12.9	
8H	4H	12.0	12.3	12.4	12.7	13.1	11.8	12.1	12.3	12.5	13.0
	6H	11.9	12.2	12.4	12.6	13.1	11.7	12.0	12.2	12.4	12.9
	8H	11.9	12.1	12.3	12.5	13.0	11.7	11.9	12.2	12.4	12.9
	12H	11.8	12.0	12.3	12.5	13.0	11.6	11.8	12.1	12.3	12.8
12H	4H	12.0	12.2	12.4	12.7	13.1	11.8	12.1	12.2	12.5	12.9
	6H	11.9	12.1	12.3	12.5	13.0	11.7	11.9	12.2	12.4	12.9
	8H	11.8	12.0	12.3	12.5	13.0	11.6	11.8	12.1	12.3	12.8
Variations with the observer position at spacing:											
S =	1.0H	6.9 / -27.9					6.8 / -18.2				
	1.5H	9.7 / -28.2					9.6 / -18.4				
	2.0H	11.7 / -28.5					11.6 / -18.6				