

Ultimo aggiornamento delle informazioni: Ottobre 2024

Configurazione di prodotto: BK68

BK68: Linealuce Mini - Wall-/Ceiling-mounted - Neutral White LED - 24V/500mA dc - L=262mm - 20° Medium Optic

**Codice prodotto**

BK68: Linealuce Mini - Wall-/Ceiling-mounted - Neutral White LED - 24V/500mA dc - L=262mm - 20° Medium Optic

Descrizione tecnica

Direct light luminaire, designed to use monochrome LED lamps. Ceiling- and wall-mounted. Consists of a body and supports for installation (to be ordered separately). Extruded aluminium body, with zamak die-cast end caps complete with silicone gaskets. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED power plate in Neutral White with 24V/500mA dc electronic circuit (power supply to be ordered separately); 24V/500mA smart driver allowing constant light flow emission despite variations in the input voltage (from 30V dc to 16V dc). Fitted with satin-finish polycarbonate film and optics with plastic (methacrylate) lens for 20° MEDIUM lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Installazione

The following accessories are available for installation: adjustable wall-mounted arms in AISI304 stainless steel (L=83mm code BZJ9, 200mm code BZJ8) and a plate for surface- or ceiling-mounting made of anodised aluminium (BZJ6).

Colore

Grigio (15)

Montaggio

a parete|a soffitto

Cablaggio

The product is supplied with a single nickel-plated brass cable gland PG9 and a 2x1mm² PVC and polyurethane outlet cable, 2000mm long. For the electrical connection there is an IP68 linear connector (BZK6) and an IP67 junction box with quick-coupling terminals (BZK7). 24V/500mA dc electronic ballasts to be ordered separately: 32W (BZA0), 25W (K980), and 35W (BZM4)

Note


Product complete with LED lamp.

Soddisfa EN60598-1 e relative note

**Dati tecnici**

| | | | |
|--|------|--|-------------------------------|
| Im di sistema: | 260 | Temperatura colore [K]: | 4000 |
| W di sistema: | 4.7 | MacAdam Step: | 3 |
| Im di sorgente: | 390 | Life Time LED 1: | 66,000h - L80 - B10 (Ta 25°C) |
| W di sorgente: | 4.7 | Life Time LED 2: | 66,000h - L80 - B10 (Ta 40°C) |
| Efficienza luminosa (lm/W, dati di sistema): | 55.4 | Codice lampada: | LED |
| Im in modalità emergenza: | - | Numero di lampade per vano ottico: | 1 |
| Flusso totale emesso a 90° o superiore [Lm]: | 0 | Codice ZVEI: | LED |
| Light Output Ratio (L.O.R.) [%]: | 67 | Numero di vani ottici: | 1 |
| Angolo di apertura [°]: | 14° | Intervallo temperatura ambiente operativa: | da -30°C a 50°C. |
| CRI (minimo): | 80 | Corrente LED [mA]: | 500 |

Polare

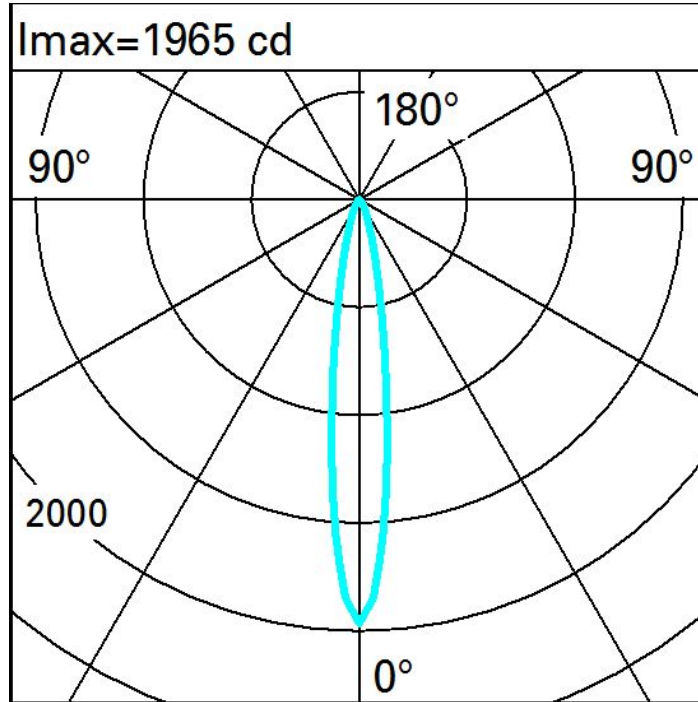

Illuminamenti

