


Last information update: April 2025

**Product configuration: QF82.39**

QF82.39: Ø 163 mm - neutral white - DALI - UGR<19 - 16.9W 2279lm - 4000K - White / Aluminium

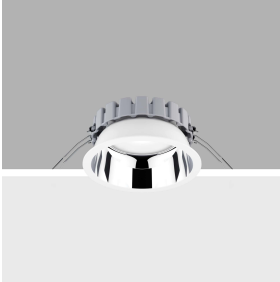

**Product code**

QF82.39: Ø 163 mm - neutral white - DALI - UGR<19 - 16.9W 2279lm - 4000K - White / Aluminium

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in neutral white colour tone (4000K). Light beam with UGR<19 L<3000 cd/m<sup>2</sup> ideal for environments with video terminals.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

0.68


**Mounting**

ceiling surface

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	2279	Colour temperature [K]:	4000
W system:	16.9	MacAdam Step:	2
lm source:	2650	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	14	Lamp code:	LED
Luminous efficiency (lm/W, real value):	134.9	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	86	Control:	DALI-2
CRI (minimum):	80		


**Polar**

<p>Imax=3202 cd α=47°</p>	<p><b>CIE</b> nL 0.86 95-100-100-100-86 UGR 16.7-16.7 <b>DIN</b> A.61 <b>UTE</b> 0.86A+0.00T F*1=951 F*1+F*2=1000 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L&lt;1500 cd/m<sup>2</sup> at 65° UGR&lt;19   L&lt;1500 cd/mq @65°</p>	<b>Lux</b>			
		h	d	Em	E <sub>max</sub>
		2	1.7	625	800
		4	3.5	156	200
		6	5.2	69	89
8	6.9	39	50		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	71	68	66	71	68	67	64	75
1.0	79	76	73	70	75	72	72	69	80
1.5	84	81	79	77	80	78	77	74	87
2.0	87	85	83	81	84	82	81	79	91
2.5	89	87	86	84	86	84	84	81	94
3.0	90	89	88	87	87	86	85	83	96
4.0	91	90	89	89	88	88	87	84	98
5.0	91	91	90	90	89	89	87	85	99

Luminance curve limit

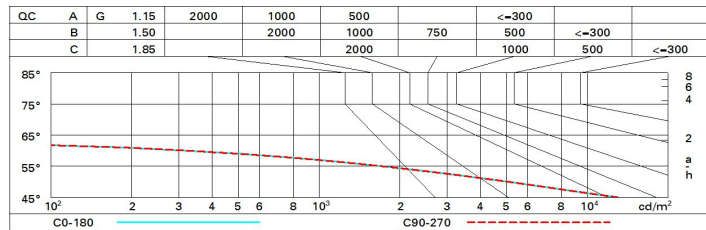

UGR diagram

Corrected UGR values (at 2650 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.3	17.9	17.5	18.1	18.4	17.3	17.9	17.5	18.1	18.4
	3H	17.1	17.7	17.4	18.0	18.3	17.1	17.7	17.4	18.0	18.3
	4H	17.1	17.6	17.4	17.9	18.2	17.1	17.6	17.4	17.9	18.2
	6H	17.0	17.5	17.3	17.8	18.1	17.0	17.5	17.3	17.8	18.1
	8H	16.9	17.4	17.3	17.7	18.1	16.9	17.4	17.3	17.7	18.1
12H	16.9	17.4	17.3	17.7	18.0	16.9	17.4	17.3	17.7	18.0	
4H	2H	17.1	17.6	17.4	17.9	18.2	17.1	17.6	17.4	17.9	18.2
	3H	16.9	17.4	17.3	17.7	18.0	16.9	17.4	17.3	17.7	18.0
	4H	16.8	17.2	17.2	17.6	18.0	16.8	17.2	17.2	17.6	18.0
	6H	16.7	17.1	17.1	17.5	17.9	16.7	17.1	17.1	17.5	17.9
	8H	16.7	17.0	17.1	17.4	17.8	16.7	17.0	17.1	17.4	17.8
12H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8	
8H	4H	16.7	17.0	17.1	17.4	17.8	16.7	17.0	17.1	17.4	17.8
	6H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8
	8H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
	12H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
12H	4H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8
	6H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
	8H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
Variations with the observer position at spacing:											
S =	1.0H	4.2 / -15.1					4.2 / -15.1				
	1.5H	7.0 / -37.3					7.0 / -37.3				
	2.0H	9.0 / -38.6					9.0 / -38.6				