Laser Blade XS

Last information update: June 2025

Product configuration: Q898
Q898: Ceiling-mounted Linear Wall Washer

Product code
Q898: Ceiling-mounted Linear Wall Washer

Technical description
Ceiling-mounted linear luminaire for LED lamps. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an even efficient beam on the wall. Extruded aluminium main body and technical dissipation unit - shaped steel fixing plate. Ballast not included, available with separate code.

Installation
Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

| Colour	Weight (Kg)
Black / Black (43) | Black / White (47)	0.3

Mounting
ceiling surface

Wiring
Cables supplied with quick-coupling terminals for connecting to power supply line.
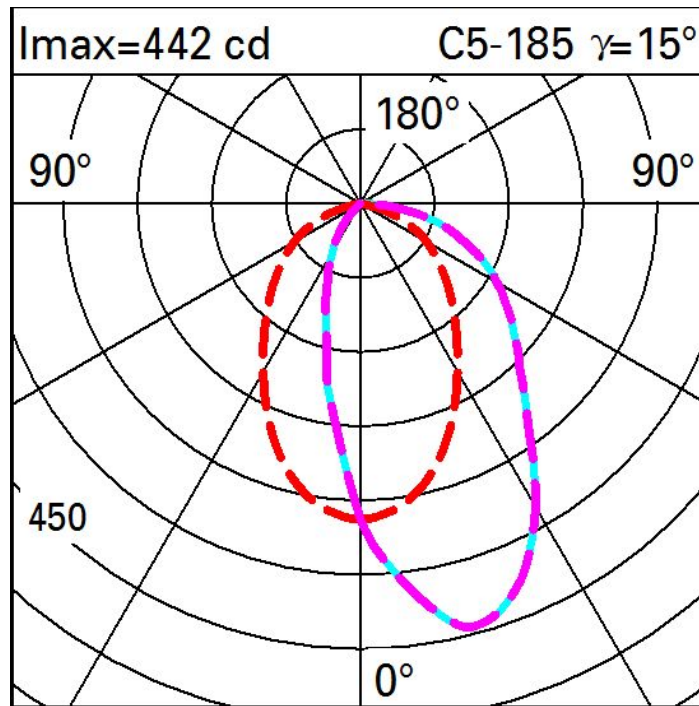
Complies with EN60598-1 and pertinent regulations

50
27
184

Technical data

lm system:	589	Colour temperature [K]:	2700
W system:	17	MacAdam Step:	2
lm source:	1550	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	17	Lamp code:	LED
Luminous efficiency (lm/W, real value):	34.6	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	38	LED current [mA]:	600
CRI (minimum):	90		

Polar

Imax=442 cd   C5-185 γ=15°

180°

90°   90°

450

0°

Illuminances

Lux											Wall distance = 1m

```
Lux                                    Wall distance = 1m
3 ●
    1    3    8   23   61  101   61   23    8    3    1
2   3 —6 —13 —29 —60 —83 —60 —29 —13 —6 —3
    4    7   13   26   44   55   44   26   13    7    4
1   4 —6 —11 —20 —30 —36 —30 —20 —11 —6 —4
    3    6    9   14   20   23   20   14    9    6    3
0
   m       -2       -1        0        1        2        3
```