

Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: June 2025

Product configuration: PH62.01

PH62.01: Frame adjustable 5-cell recessed luminaire - LED - Neutral White - DALI dimmable power supply - Medium - 8.7W 770.8lm - 4000K - CRI 90 - White



Product code

PH62.01: Frame adjustable 5-cell recessed luminaire - LED - Neutral White - DALI dimmable power supply - Medium - 8.7W 770.8lm - 4000K - CRI 90 - White

Technical description

Recessed rectangular luminaire with LEDs. Shaped steel sheet structural compartment with outer rim. The 5 lighting cells linear body, in die-cast aluminium, can be used to direct the emission with a tilting adjustability of +/- 30°. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled luminance. Supplied with DALI dimmable power supply connected to the luminaire.

Installation

recessed with mechanical blocking system for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal)

Colour

White (01)

Weight (Kg)

0.69

Mounting

wall recessed|ceiling recessed

Wiring

On power supply box: screw connections.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	771	Rf (Colour Fidelity Index):	94
W system:	8.7	Rg (Gamut Index):	102
lm source:	940	Colour temperature [K]:	4000
W source:	7.1	MacAdam Step:	3
Luminous efficiency (lm/W, real value):	88.6	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
lm in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	82	ZVEI Code:	LED
Beam angle [°]:	22°	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2


Polar

Imax=3329 cd		CIE nL 0.82 100-100-100-100-82 UGR 10.4-10.4 DIN A.61 UTE 0.82A+0.00T F*1=999 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<16 L<1500 cd/mq @65°	Lux			
90°	180°		h	d	Em	E _{max}
			2	0.8	658	832
			4	1.6	165	208
			6	2.3	73	92
			8	3.1	41	52

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	68	66	70	67	67	64	78
1.0	77	74	72	70	73	71	71	68	83
1.5	81	79	77	75	78	76	75	73	89
2.0	84	82	80	79	81	79	78	76	93
2.5	85	84	83	82	83	82	81	79	96
3.0	86	85	84	84	84	83	82	80	98
4.0	87	86	86	85	85	85	83	81	99
5.0	88	87	87	87	86	85	84	82	100

Luminance curve limit

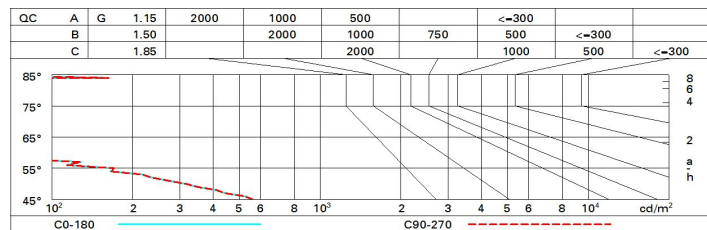

UGR diagram

Corrected UGR values (at 940 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	11.3	13.4	11.7	13.7	14.0	11.3	13.4	11.7	13.7	14.0
	3H	11.2	12.8	11.6	13.1	13.4	11.2	12.8	11.6	13.1	13.4
	4H	11.1	12.5	11.5	12.8	13.1	11.1	12.5	11.5	12.8	13.1
	6H	11.0	12.2	11.4	12.5	12.9	11.0	12.2	11.4	12.5	12.9
	8H	11.0	12.1	11.4	12.5	12.8	11.0	12.1	11.4	12.5	12.8
	12H	10.9	12.1	11.4	12.4	12.8	10.9	12.1	11.4	12.4	12.8
4H	2H	11.1	12.5	11.5	12.8	13.1	11.1	12.5	11.5	12.8	13.1
	3H	10.9	12.1	11.4	12.4	12.8	10.9	12.1	11.4	12.4	12.8
	4H	10.8	11.9	11.3	12.3	12.7	10.8	11.9	11.3	12.3	12.7
	6H	10.5	12.1	11.0	12.6	13.0	10.5	12.1	11.0	12.6	13.0
	8H	10.4	12.2	10.9	12.6	13.1	10.4	12.2	10.9	12.6	13.1
	12H	10.3	12.2	10.8	12.7	13.2	10.3	12.2	10.8	12.7	13.2
8H	4H	10.4	12.2	10.9	12.6	13.1	10.4	12.2	10.9	12.6	13.1
	6H	10.2	12.0	10.8	12.5	13.0	10.2	12.0	10.8	12.5	13.0
	8H	10.2	11.8	10.7	12.3	12.8	10.2	11.8	10.7	12.3	12.8
	12H	10.4	11.3	10.9	11.8	12.4	10.4	11.3	10.9	11.8	12.4
12H	4H	10.3	12.2	10.8	12.7	13.2	10.3	12.2	10.8	12.7	13.2
	6H	10.2	11.8	10.7	12.3	12.8	10.2	11.8	10.7	12.3	12.8
	8H	10.4	11.3	10.9	11.8	12.4	10.4	11.3	10.9	11.8	12.4
Variations with the observer position at spacing:											
S =	1.0H	6.8 / -28.7					6.8 / -28.7				
	1.5H	9.6 / -30.9					9.6 / -30.9				
	2.0H	11.6 / -33.1					11.6 / -33.1				