

Last information update: May 2024

**Product configuration: P385.01**

P385.01: Fixed round recessed luminaire - Minimal - LED - Wall Washer - White

**Product code**P385.01: Fixed round recessed luminaire - Minimal - LED - Wall Washer - White **Attention! Code no longer in production****Technical description**

Minimal round recessed luminaire (frameless). Fixed Wall Washer version: the optic system is designed to aim the light flow on a vertical surface with no shadow zones and a precise outline. The main body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Die-cast aluminium structure installed flush with ceiling. Adapter for false ceilings between 12.5 and 25 mm thick. The optic unit includes two shaped metallized thermoplastic reflectors, a PMMA refractor/safety screen and a plastic anti-glare casing available in a range of painted and metallised finishes. Quick and easy tool free assembly. High color rendering index 3,000K LED. Power unit available with a separate code no.

**Installation**

For flush with ceiling installation, an adapter is fitted according to the thickness of the false ceiling (12.5 to 25 mm). The following filling and finishing operations are simplified by a special protection template, and the luminaire is recessed in the adapter by means of an anti-fall steel wire spring.

**Colour**

White (01)

**Weight (Kg)**

0.23

**Mounting**

wall recessed|ceiling recessed

**Wiring**

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Complies with EN60598-1 and pertinent regulations



IP20

IP44

On the visible part of the product once installed




pending

**Technical data**

Im system:	700	Colour temperature [K]:	3000
W system:	9.9	MacAdam Step:	2
Im source:	1250	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	9.9	Lamp code:	LED
Luminous efficiency (lm/W, real value):	70.7	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	56	LED current [mA]:	300
CRI (minimum):	90		

Polar

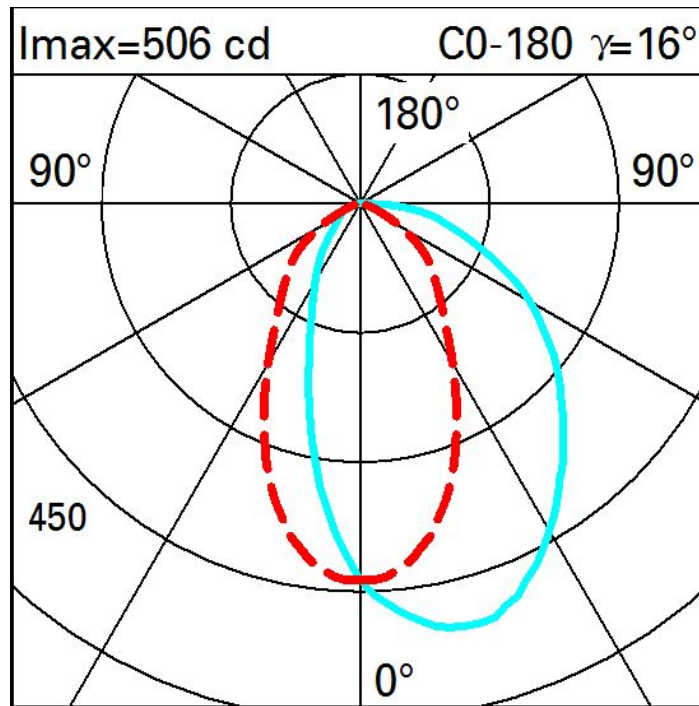

Illuminances

Lux												Wall distance = 1m	
3													
	0.3	1.0	4	19	63	135	63	19	4	1.0	0.3		
2	1	4	11	28	72	121	72	28	11	4	1		
	3	6	11	25	53	74	53	25	11	6	3		
1	3	5	10	20	35	44	35	20	10	5	3		
	3	5	9	15	22	26	22	15	9	5	3		
0													
	m	-2	-1	0	1	2	3						