

Underscore X26



Design iGuzzini

iGuzzini

Last information update: June 2023

Product configuration: M880

M880: X26 recessed 1500 High Flux 4200K



Product code

M880: X26 recessed 1500 High Flux 4200K **Attention! Code no longer in production**

Technical description

Rigid-profile product for linear LED lighting, designed to be recessed. High Flux version recommended for lighting display cases, shelves, display corners and perimeter borders. Extruded aluminium bar structure with contact frame. Diffusing opal polycarbonate linear screen. Moulded polycarbonate sides and end closing caps. The product has contact springs for recessed application in blind holes (shelves). Use the accessory springs for insertion in supports with through holes. Version with 18 LED 24Vdc high emission module (total 18W) - white colour, neutral white tone (4200K) - colour rendering index (CRI) 80. Ballast not included

Installation

Pressed into blind hole previously prepared, using contact springs supplied with the luminaire. For applications with through holes, remove the contact springs and use the accessory kit (MWK3) for standard recessed fixing (1 to 30 mm false ceilings)

Colour

Clear transparent (24) | Aluminium (12)

Mounting

wall surface|ceiling surface

Wiring

Constant voltage ballasts to be ordered separately: electronic 50W 24V (MWK4) - electronic 70W 24V dimmable 1-10V (MWK5). Power supply end cap with cable (MWK1 - for connection to the ballast); intermediate power supply cap with cable (MWK2 - for connection between modules)

Notes

For fixing, connections and power supply, use the components available with a separate code. For large installations and considerable lengths, DIN rail mounted electronic ballasts can be used: 9910 (72W) - 9911 (96W) - 9912 (240W)

Complies with EN60598-1 and pertinent regulations



IP40




Technical data

Im system:	816.9
W system:	22.1
Im source:	1592
W source:	20
Luminous efficiency (Im/W, real value):	37
Im in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	51

CRI:	80
Colour temperature [K]:	4000
Life Time LED 1:	50,000h - L70 - B20 (Ta 25°C)
Ballast losses [W]:	2.1
Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1


Polar

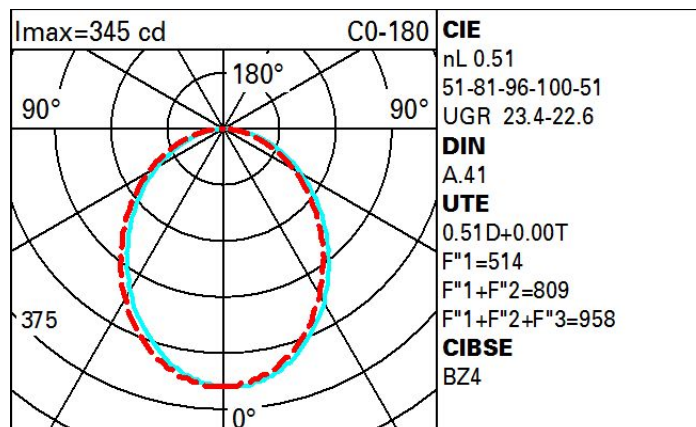

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	35	29	26	23	29	25	25	22	42
1.0	38	33	30	27	32	29	29	25	49
1.5	43	39	36	33	38	35	35	32	62
2.0	46	43	40	38	42	40	39	36	70
2.5	48	45	43	41	44	42	42	39	76
3.0	49	47	45	43	46	44	43	41	79
4.0	51	49	47	46	48	46	46	43	84
5.0	52	50	49	48	49	48	47	45	87

Luminance curve limit

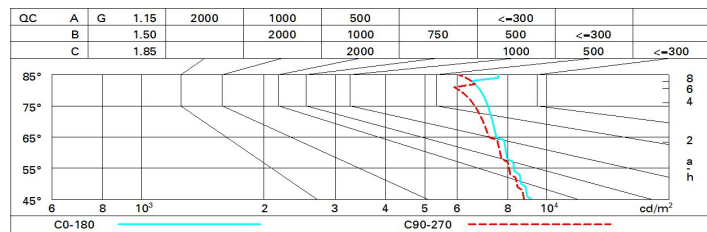

UGR diagram

Corrected UGR values (at 1676 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	19.5	20.6	19.8	20.9	21.2	19.4	20.5	19.7	20.8	21.0
	3H	21.0	22.0	21.3	22.3	22.6	19.8	20.9	20.2	21.2	21.5
	4H	21.7	22.6	22.0	22.9	23.3	20.0	21.0	20.4	21.3	21.6
	6H	22.2	23.1	22.6	23.4	23.8	20.1	21.0	20.5	21.4	21.7
	8H	22.4	23.3	22.8	23.6	24.0	20.1	21.0	20.5	21.3	21.7
	12H	22.6	23.4	23.0	23.8	24.2	20.1	20.9	20.5	21.3	21.7
4H	2H	20.1	21.1	20.5	21.4	21.7	21.3	22.3	21.7	22.6	22.9
	3H	21.8	22.6	22.2	23.0	23.3	22.0	22.8	22.4	23.2	23.5
	4H	22.5	23.3	23.0	23.7	24.1	22.3	23.0	22.7	23.4	23.8
	6H	23.2	23.8	23.6	24.3	24.7	22.5	23.2	23.0	23.6	24.0
	8H	23.4	24.0	23.9	24.5	24.9	22.6	23.2	23.1	23.6	24.1
	12H	23.7	24.2	24.1	24.7	25.1	22.6	23.2	23.1	23.6	24.1
8H	4H	22.8	23.4	23.3	23.8	24.3	23.0	23.6	23.5	24.0	24.5
	6H	23.6	24.1	24.1	24.5	25.0	23.4	23.9	23.9	24.4	24.9
	8H	23.9	24.4	24.4	24.8	25.3	23.6	24.0	24.1	24.5	25.0
	12H	24.2	24.6	24.7	25.1	25.6	23.7	24.1	24.2	24.6	25.1
12H	4H	22.8	23.4	23.3	23.8	24.3	23.2	23.7	23.6	24.1	24.6
	6H	23.6	24.1	24.1	24.6	25.1	23.6	24.0	24.1	24.5	25.0
	8H	24.0	24.4	24.5	24.9	25.4	23.8	24.2	24.3	24.7	25.2
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.2 / -0.3					0.2 / -0.4				
	2.0H	0.5 / -0.6					0.4 / -0.7				