



Last information update: August 2025

Product configuration: MQ64

MQ64: Recessed frame - LED - Neutral white - Incorporated DALI dimmable power supply - Diffused lighting

**Product code**MQ64: Recessed frame - LED - Neutral white - Incorporated DALI dimmable power supply - Diffused lighting **Attention! Code no longer in production****Technical description**

Miniaturized recessed rectangular luminaire with LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Optical system designed for diffused lighting distribution. Flux enhancer - superpure aluminium reflector - microprism screen in transparent PMMA with optimised geometry texture; a special film in acrylic material, combined with the screen, allow for a comfortable level of lighting diffusion. Black polycarbonate internal perimeter frame. Supplied with DALI dimmable control gear connected to the luminaire. High colour rendering LED.

Installation

recessed with steel springs for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal) - preparation slot 37 x 406

Colour

Black / Black (43) | Black / White (47) | Grey / Black (74)

Mounting

wall recessed/ceiling recessed

Wiring

on power box: screw connections

Notes

dimming function with pushbutton (TOUCH DIM/PUSH): for this option consult the instructions included in the package

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1739	CRI (typical):	97
W system:	35	Colour temperature [K]:	4000
lm source:	3050	MacAdam Step:	3
W source:	31	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	49.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	57	Number of optical assemblies:	1
CRI (minimum):	95	Control:	DALI


Polar

	CIE nL 0.57 75-95-100-100-57 UGR 22.2-26.4 DIN A.61 UTE 0.57B+0.00T F*1=749 F*1+F*2=947 F*1+F*2+F*3=996				
	h	d1	d2	Em	Emax
	1	1	1.3	1071	1487
	2	2	2.7	268	372
	3	2.9	4	119	165
	4	3.9	5.4	67	93

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	45	41	38	35	40	37	37	34	60
1.0	48	44	41	39	43	41	41	38	66
1.5	53	50	47	45	49	47	46	44	76
2.0	55	53	51	49	52	50	50	47	83
2.5	57	55	53	52	54	52	52	50	87
3.0	58	56	55	54	55	54	53	51	90
4.0	59	58	57	56	57	56	55	53	93
5.0	59	58	58	57	57	57	56	54	94

Luminance curve limit

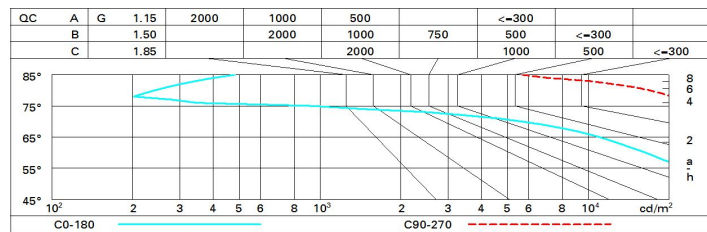

UGR diagram

Corrected UGR values (at 3050 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	22.0	22.8	22.3	23.0	23.3	25.5	26.3	25.8	26.6	26.8
	3H	22.0	22.7	22.3	23.0	23.3	25.5	26.3	25.9	26.6	26.9
	4H	21.9	22.6	22.3	22.9	23.2	25.5	26.2	25.8	26.5	26.8
	6H	21.8	22.5	22.2	22.8	23.1	25.4	26.1	25.8	26.4	26.7
	8H	21.8	22.4	22.2	22.8	23.1	25.4	26.0	25.8	26.3	26.7
	12H	21.8	22.4	22.2	22.7	23.1	25.3	25.9	25.7	26.3	26.6
4H	2H	22.4	23.1	22.7	23.4	23.7	26.3	27.0	26.7	27.3	27.7
	3H	22.4	23.0	22.8	23.4	23.7	26.5	27.1	26.9	27.4	27.8
	4H	22.4	22.9	22.8	23.3	23.7	26.5	27.0	26.9	27.4	27.8
	6H	22.3	22.7	22.7	23.1	23.6	26.4	26.9	26.9	27.3	27.7
	8H	22.2	22.7	22.7	23.1	23.5	26.4	26.8	26.8	27.2	27.7
	12H	22.2	22.6	22.6	23.0	23.5	26.3	26.7	26.8	27.1	27.6
8H	4H	22.4	22.8	22.8	23.2	23.6	26.6	27.0	27.1	27.5	27.9
	6H	22.3	22.6	22.8	23.1	23.5	26.6	26.9	27.0	27.4	27.8
	8H	22.2	22.5	22.7	23.0	23.5	26.5	26.8	27.0	27.3	27.8
	12H	22.2	22.4	22.7	22.9	23.4	26.5	26.7	27.0	27.2	27.7
12H	4H	22.3	22.7	22.8	23.1	23.6	26.6	27.0	27.0	27.4	27.9
	6H	22.2	22.5	22.7	23.0	23.5	26.5	26.8	27.0	27.3	27.8
	8H	22.2	22.4	22.7	22.9	23.5	26.5	26.8	27.0	27.2	27.8
Variations with the observer position at spacing:											
S =		1.0H					1.4 / -2.0				
		1.5H					2.2 / -4.2				
		2.0H					3.5 / -6.6				
							0.4 / -0.7				
							1.5 / -1.6				
							2.8 / -2.3				